

## STREAMCUT

wall

**EN** Recessed wall luminaire in aluminium in a simple, minimalist design; surface anodised and powder coated in dark grey or black; partially printed safety glass, fixed with stainless steel screws; reflector in matt anodised aluminium with asymmetric radiation characteristic; energy-efficient LEDs with very good colour rendering; degree of protection IP 65, with pressure compensation valve; ambient temperatures from -20°C to + 50°C; separate luminaire wiring compartment, suitable for through wiring

**FR** Luminaire mural encastré en aluminium dans un design sobre et épuré ; surface anodisé (protection) et thermolaquée en gris foncé ou noir ; verre de sécurité partiellement imprimé, fixé avec vis en inox ; Réflecteur en aluminium pur mat anodisé avec caractéristique de rayonnement asymétrique ; LED économes en énergie à restitution de couleur élevée ; genre protection IP 65, avec soupape compensation pression ; températures ambiantes de -20°C à +50°C ; logement séparé de branchement de luminaire, convient à un câblage passant

### Quickinfo

3000 K  
CRI ≥ 80 / 3 SDCM  
jusqu'à 35 lm/W  
L80 / 50000 h  
non DIM  
IP65, IK08

### Types



### Couleur



### Répartition de la lumière






### STREAMCUT wall




ASYMMETRIC CRI ≥ 80, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
8.4 W	3000 K	293 lm	35 lm/W	0 8 8 - 2 8 3 1 5 1 <input checked="" type="checkbox"/>




### Planning Information

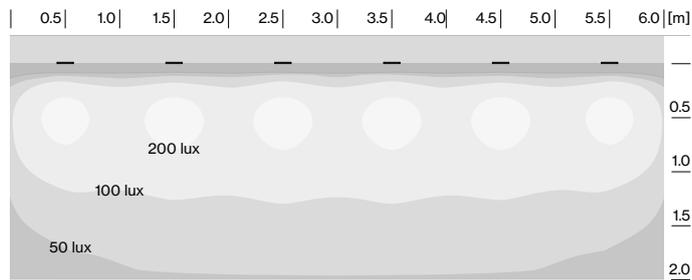

**STREAMCUT wall** (8.4 W, 6 luminaires)  
 wall mounting height from bottom: 0.8m / distance between luminaires: 1.0m

### Mounting accessories (optional)



#### MOUNTING HOUSING

TYPE	L-W-H (mm)	ORDER CODE
for concrete and solid walls	290-100-200	0 8 8 - 2 8 9 1 1 1 0

### Order options

COLOUR	<input checked="" type="checkbox"/>
jet black RAL 9005	8
grey aluminium RAL 9007	D