


## Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
jusqu'à 62 lm/W
L80 / 50000 h, L90 / 50000 h
DALI-2, non DIM
IP20

### Types

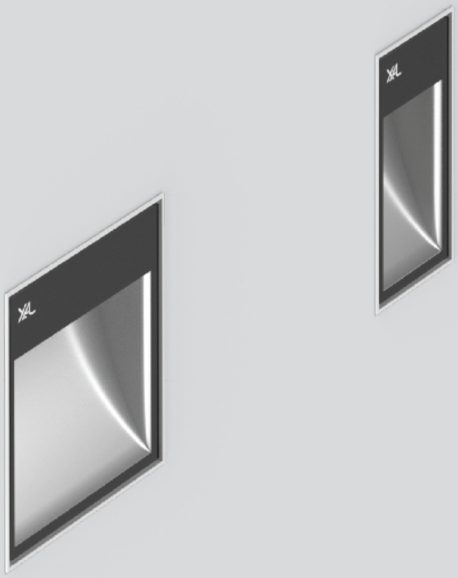


### Colours

### Set de montage

### Répartition de la lumière

# **UNICO** wall

recessed

EN Recessed wall luminaire in aluminium; installation without tools in mounting set (trimless or with trim) with ball catch system; installation possible in different housings; surface powder coated; incl. external converter; high-quality reflector with micro-faceted, aluminum-vaporised surface; different asymmetrical light distributions; installation optionally for floor or ceiling illumination; energy-efficient high power LEDs with very good colour rendering


FR Luminaire mural encastré en alum. ; montage sans outil en kit de montage (sans bord ou avec bord continu) par système à déclic à bille ; encastrement possible dans différents boîtiers ; surface thermolaquée ; avec convertisseur externe ; réflecteur de grande qualité avec surface à microfacettes, métallisée à l'aluminium ; différentes répartitions de lumière asymétriques ; montage au choix pour l'éclairage du sol ou du plafond ; High-Power-LED à grande efficacité énergétique, très bon rendu des couleurs




homogeneous floor illumination



saftey glass for dust protection





## **UNICO** wall 1 lamp recessed





**WIDE FLOOR** jet black, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 9.0 W | 2700 K | 492 lm | 55 lm/W | 0 9 0 - 6 L 1 4 ≎ U B 0 0 1 |
| | 3000 K | 524 lm | 58 lm/W | 0 9 0 - 6 L 1 5 ≎ U B 0 0 1 |
| | 4000 K | 562 lm | 62 lm/W | 0 9 0 - 6 L 1 6 ≎ U B 0 0 1 |







## **UNICO** wall 2 lamps recessed





**WIDE FLOOR** jet black, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 17.3 W | 2700 K | 934 lm | 54 lm/W | 0 9 0 - 6 L 2 4 ≎ U B 0 0 1 |
| | 3000 K | 995 lm | 58 lm/W | 0 9 0 - 6 L 2 5 ≎ U B 0 0 1 |
| | 4000 K | 1070 lm | 62 lm/W | 0 9 0 - 6 L 2 6 ≎ U B 0 0 1 |





## Planning Information

### wide floor

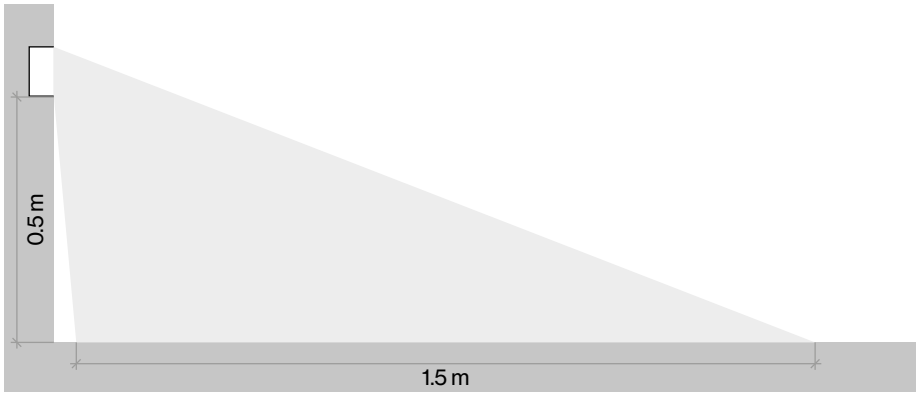


## Mounting accessories (required)





**MOUNTING SET trimless** for plasterboard ceilings

| PLASTERBOARD CEILING THICKNESS | L·W·H (mm) | ORDER CODE |
|---|---|---|
| 12.5/15/20/25 mm | 85·47·47 | 0 9 0 - 7 L 2 0 1 0 0 |

for UNICO L2 and UNICO wall recessed 1 lamp

## Order options

| CONTROL | ≎ | COLOUR | |
|---|---|---|---|
| non DIM | 1 | jet black | RAL 9005 |
| DALI-2 | 3 | traffic white | RAL 9016 |




**MOUNTING SET trimless** for plasterboard ceilings

| PLASTERBOARD CEILING THICKNESS | L·W·H (mm) | ORDER CODE |
|---|---|---|
| 12.5/15/20/25 mm | 85·85·47 | 0 9 0 - 7 Q 4 0 1 0 0 |


for UNICO Q4 | UNICO wall recessed 2 lamps




**MOUNTING SET with trim** for intermediate ceilings, 2-25 mm

| COLOUR | L·W·H (mm) | ORDER CODE |
|---|---|---|
| jet black | 101·63·30 | 0 9 0 - 7 L 2 0 2 0 B |
| traffic white | 101·63·30 | 0 9 0 - 7 L 2 0 2 0 W |

for UNICO L2 and UNICO wall recessed 1 lamp





**MOUNTING SET with trim** for intermediate ceilings, 2-25 mm

| COLOUR | L·W·H (mm) | ORDER CODE |
|---|---|---|
| jet black | 101·101·30 | 0 9 0 - 7 Q 4 0 2 0 B |
| traffic white | 101·101·30 | 0 9 0 - 7 Q 4 0 2 0 W |

for UNICO Q4 | UNICO wall recessed 2 lamps

## Mounting accessories (optional)




**PRIMED CONCRETE MOUNTING HOUSING**

| L·W·H (mm) | ORDER CODE |
|---|---|
| 240·400·130 | 0 5 2 - 1 9 1 4 3 2 0 |

order mounting set separately

**Order options**

| COLOUR | |
|---|---|
| jet black | RAL 9005 |
| traffic white | RAL 9016 |