

MINO 60 S CIRCLE

suspended


EN Ring shaped luminaire housing from rolled aluminium extruded profile, seamlessly welded; flat design luminaire housing; surface powder coated; pendant fitting with cable suspension, alternatively with canopy central; height adjustment without tools; incl. feed (black or white); converter included in canopy; HPO (High Performance Opal) cover for uniform illumination; optional with direct/indirect illumination characteristic for additional emphasis of the ceiling and more visual comfort; energy-efficient LEDs with very good colour rendering

FR Corps de luminaire en forme d'anneau en profil extrudé roulé en aluminium soudé sans trace visible ; forme plate ; surface thermolaquée ; suspension par câble, au choix avec cache-piton centrale ; réglage en hauteur sans outil ; câble d'alimentation inclus (noir ou blanche) ; convertisseur inclus dans le cache-piton ; cache HPO (High Performance Opal) pour éclairage homogène ; en option avec caractéristique de rayonnement direct / indirect pour mettre le plafond en valeur et un meilleur confort de vue ; LED économes en énergie à restitution de couleur élevée

Quickinfo

3000 K, 4000 K
 CRI \geq 80 / 3 SDCM (initial MacAdam)
 jusqu'à \downarrow 10,300 lm / \uparrow 5,800 lm
 jusqu'à 137 lm/W
 L90 / 100000 h
 DALI-2
 High Performance Opal
 IP20

Types

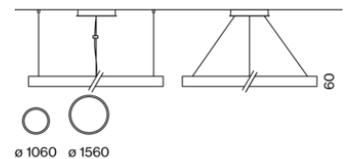

Couleur




Répartition de la lumière




DiiA® standards
 251, 252, 253



direct / indirect
 illumination



*direct/indirect version



*direct/indirect version

MINO 60 S circle 1000 suspended




OPAL | DIRECT CRI ≥ 80, DALI-2


| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|--|
| 59.0 W | 3000 K | 6860 lm | 116 lm/W | 0 3 4 - 7 <input type="checkbox"/> 1 2 5 3 <input checked="" type="checkbox"/> H |
| | 4000 K | 7300 lm | 124 lm/W | 0 3 4 - 7 <input type="checkbox"/> 1 2 6 3 <input checked="" type="checkbox"/> H |

OPAL | DIRECT / INDIRECT CRI ≥ 80, DALI-2

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|----------------|----------|--|
| 79.0 W | 3000 K | ↓6860/↑3120 lm | 126 lm/W | 0 3 4 - 7 <input type="checkbox"/> 1 3 5 3 <input checked="" type="checkbox"/> H |
| | 4000 K | ↓7300/↑3550 lm | 137 lm/W | 0 3 4 - 7 <input type="checkbox"/> 1 3 6 3 <input checked="" type="checkbox"/> H |



*direct/indirect version



*direct/indirect version

MINO 60 S circle 1500 suspended



OPAL | DIRECT CRI ≥ 80, DALI-2

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|--|
| 83.0 W | 3000 K | 9630 lm | 116 lm/W | 0 3 4 - 7 <input type="checkbox"/> 1 0 5 3 <input checked="" type="checkbox"/> H |
| | 4000 K | 10300 lm | 124 lm/W | 0 3 4 - 7 <input type="checkbox"/> 1 0 6 3 <input checked="" type="checkbox"/> H |

OPAL | DIRECT / INDIRECT CRI ≥ 80, DALI-2

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---------|--------------|-----------------|----------|--|
| 119.0 W | 3000 K | ↓9630/↑5100 lm | 124 lm/W | 0 3 4 - 7 <input type="checkbox"/> 1 1 5 3 <input checked="" type="checkbox"/> H |
| | 4000 K | ↓10300/↑5800 lm | 135 lm/W | 0 3 4 - 7 <input type="checkbox"/> 1 1 6 3 <input checked="" type="checkbox"/> H |

Order options

| MOUNTING | | COLOUR | |
|--------------------------------|---|--------------------------|---|
| cable 1500 mm | 2 | white aluminium RAL 9006 | G |
| cable 1500 mm / canopy central | 4 | special colours | X |
| | | pure white RAL 9010 | 7 |
| | | jet black RAL 9005 | 8 |


Dentsu Aegis Network, Zurich

Suisse

Architecte
Büronauten AG

Lighting Design
Caduff Socker

Photographe
Z. Gataric Fotografie

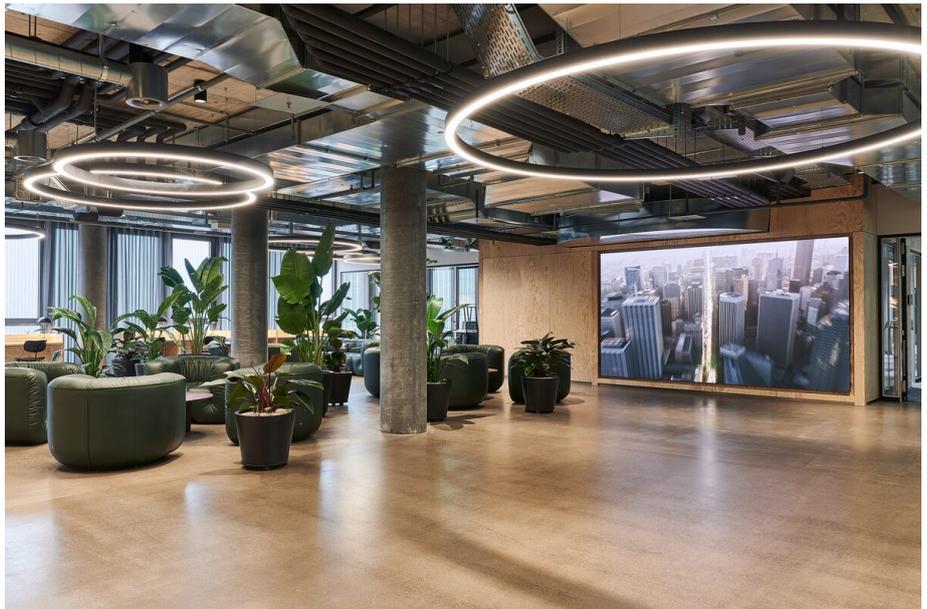

Produits utilisés




MINO 60 S CIRCLE
suspended



TULA MOVE IT 25 /
25 S / 45



TULA suspended



MINO 60 CIRCLE
suspended

