
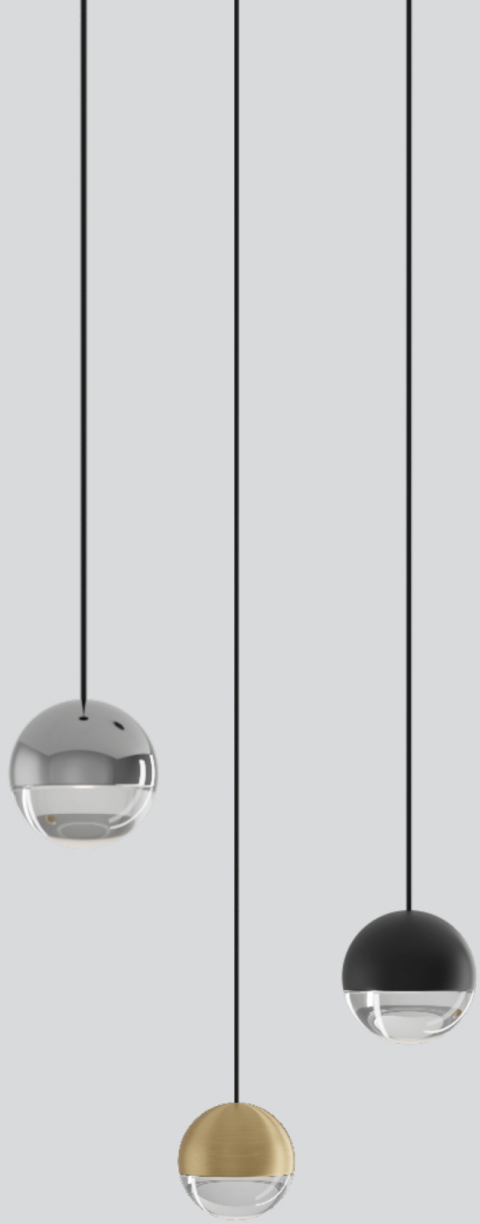


Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
jusqu'à 158 lm/W
L90 / 100000 h
DALI-2, non DIM
IP20

Types



Colours

Câble


Répartition de la lumière

NOBA

suspended

EN Decorative suspended luminaire in aluminium; surface polished chrome, brushed aluminium or powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; high quality plano-convex glass lens; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

FR Luminaire décoratif à suspension en aluminium ; surface en chrome poli, aluminium brossé ou thermolaquée ; suspension par câble, câble d'alimentation inclus (noir ou blanche) ; recoupable à volonté ; lentille verre plan-convexe grde qualité ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée ; cache-piton pour câblage continu ; convertisseur inclus dans le cache-piton ; anneaux de montage au plafond pour un positionnement multiple des luminaires dans la pièce disponibles comme accessoires




free positioning by cable and hook



high quality glass lens






NOBA 40 suspended

CRI ≥ 90 · 2 SDCM · UGR ≤ 22 · cd/m² ≤ 3000 · III · DALI 1 ADDR. · X-PERT · X-PERT

WIDE FLOOD 69°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.8 W,	2700 K	601 lm	126 lm/W	0 4 9 - 5 3 1 0 9 1 ◪ ■ W
36 Vf,	3000 K	625 lm	131 lm/W	0 4 9 - 5 3 1 0 0 1 ◪ ■ W
150 mA	4000 K	655 lm	137 lm/W	0 4 9 - 5 3 1 0 1 1 ◪ ■ W






NOBA 50 suspended

CRI ≥ 90 · 2 SDCM · UGR ≤ 22 · cd/m² ≤ 1500 · III · DALI 1 ADDR. · X-PERT · X-PERT

WIDE FLOOD 67°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.8 W,	2700 K	635 lm	133 lm/W	0 4 9 - 5 3 1 3 9 1 ◪ ■ W
36 Vf,	3000 K	660 lm	138 lm/W	0 4 9 - 5 3 1 3 0 1 ◪ ■ W
150 mA	4000 K	691 lm	144 lm/W	0 4 9 - 5 3 1 3 1 1 ◪ ■ W






NOBA 60 suspended

CRI ≥ 90 · 2 SDCM · UGR ≤ 19 · cd/m² ≤ 1500 · III · DALI 1 ADDR. · X-PERT · X-PERT

WIDE FLOOD 67°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.8 W,	2700 K	765 lm	158 lm/W	0 4 9 - 5 3 1 6 9 1 ◪ ■ W
36 Vf,	3000 K	691 lm	143 lm/W	0 4 9 - 5 3 1 6 0 1 ◪ ■ W
150 mA	4000 K	723 lm	150 lm/W	0 4 9 - 5 3 1 6 1 1 ◪ ■ W

Mounting accessories (required)




MOUNTING SET trimless for plasterboard ceilings

COLOUR	CEILING THICKNESS	Ø·H (mm)	ORDER CODE
traffic white	9-25 mm	75·48	0 0 5 - 3 5 1 1 1 1 7

excl. power supply

Order options

COLOUR	◪	COLOUR	◪	CABLE	■
brushed brass	3	traffic white RAL 9016	7	white	7
chrome	4	jet black RAL 9005	8	black	8
gun metal	5	rose gold	9		
brushed aluminium	6				



MOUNTING SET with trim for ceilings, 2-25 mm

COLOUR	Ø·H (mm)	ORDER CODE
traffic white	77·49	005-352111 7
jet black	77·49	005-352111 8

excl. power supply


Mounting accessories (optional)



HOOK surface

COLOUR	Ø·H (mm)	ORDER CODE
traffic white	16·30	030-100001 7
jet black	16·30	030-100001 8

Mounting tools accessories (optional)



SPECIAL MOUNTING TOOL for ARY | MOVE IN 45 | NOBA trimless | TULA


Ø·H (mm)	ORDER CODE
100·107	063-891211 0

necessary to install mounting housing trimless

Electrical accessories (required)

POWER SUPPLY 150 mA, 198-264 V AC, PC2

TYPE	EFFICIENCY	L·W·H (mm)	ORDER CODE
6 W | non DIM	η 80 %	93·36·25	002-90810
15 W | DALI-2	η 87 %	112·29·21	002-90811




CANOPY

CONTROL	Ø·H (mm)	ORDER CODE
non DIM	115·29	005-260121 [1]
DALI-2	115·29	005-260123 [1]

incl. power supply

Electrical accessories (optional)



DIN RAIL POWER SUPPLY BASIC 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L·W·H (mm)	ORDER CODE
160 W | PC2	220-240 V AC	η 94 %	72·90·63	005-652020 1 0

Lifetime >100.000 h @ 120 W, 45°C ambient temp., cascadable max. 3 devices

DIN RAIL LED DRIVER

TYPE	L·W·H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses / DT8 1 adress	36·88·59	005-612103 0

200 - 1050 mA settable const. current | 2 × 42 W | 48 V DC | U OUT 10 – 40 V SELV

Order options

COLOUR [1]	
traffic white RAL 9016	7
jet black RAL 9005	8