
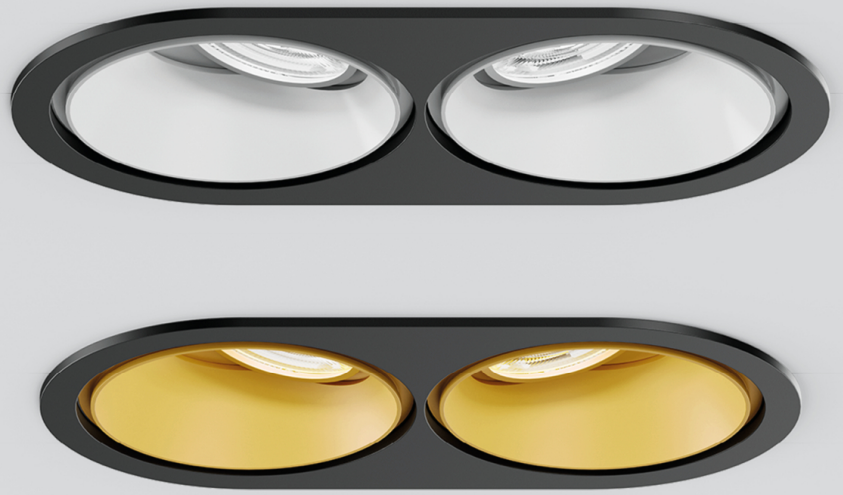


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K, colour warm dimming 1800 - 3000 K, tunable white 1800 - 4000 K, tunable white 2700 - 6500 K
CRI ≥ 90, CRI ≥ 92 / 2 SDCM (initial MacAdam), 3 SDCM (initial MacAdam)
UGR ≤ 10, UGR ≤ 13, UGR ≤ 16, UGR ≤ 19
jusqu'à 127 lm/W
L85 / 50000 h, L90 / 100000 h
DALI-2, non DIM
front IP40, back IP20

Types



Colours



Set de montage



Répartition de la lumière




SASSO 100 round adjustable

recessed 2 lamps

EN Round recessed spotlight; installation without tools in mounting set with ball catch system; surface lacquered; with trim; double lamps; light insets rotatable and tiltable; precise radiation characteristic due to high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering

FR Spot rond encastrable ; montage sans outil en kit de montage par système à déclic à bille ; surface laquée ; avec bord continu ; biflamme ; modules d'éclairage rotatif et orientable ; caractéristiques de rayonn. précises grâce à l'optique à lentille ; Technologie COB (Chip on Board) pour efficacité maximale ; pas d'ombres multiples ; LED économes en énergie à restitution de couleur élevée



360° rotatable, 30° tiltable



glare control (UGR ≤ 16)



Colour Warm Dimming 1800 – 3000 K




CRI ≥ 95 2 SDCM (optional)



SASSO 100 round adjustable (tunable white)

30° 360° | TUNABLE WHITE | CRI ≥92 | UGR ≤22 | 220-240 V | 1 ADDR. | IP20 IP40 | X-PERT | X-PERT



MEDIUM 33°, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
41.0 W	tunable w.	3340 lm	81 lm/W	0 4 8 - 2 7 2 0 ◪ 3 ◪ M

The data values for the luminous flux of fraction may differ for specific order options by -7%. Luminous flux value refers to colour matt silver colour temperature range 2700 - 6500 K. 2 insets necessary, order code only applies to 1 inset; DALI-2 power supply included

WIDE FLOOD 53°, DALI-2


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
41.0 W	tunable w.	3450 lm	84 lm/W	0 4 8 - 2 7 2 0 ◪ 3 ◪ W

The data values for the luminous flux of fraction may differ for specific order options by -6%. Luminous flux value refers to colour matt silver colour temperature range 2700 - 6500 K. 2 insets necessary, order code only applies to 1 inset; DALI-2 power supply included



SASSO 100 round adjustable

30° 360° | CRI ≥90 | 2 SDCM | UGR ≤10 | cd/m² ≤1500 | III | 1 ADDR. | IP20 IP40 | X-PERT



SPOT 20°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
2x15.2 W, 36 Vf, 450 mA	2700 K	2x1740 lm	115 lm/W	0 4 8 - 2 7 2 0 9 1 ◪ S
	3000 K	2x1800 lm	118 lm/W	0 4 8 - 2 7 2 0 0 1 ◪ S
	3500 K	2x1840 lm	121 lm/W	0 4 8 - 2 7 2 0 2 1 ◪ S
	4000 K	2x1880 lm	123 lm/W	0 4 8 - 2 7 2 0 1 1 ◪ S
2x22.7 W, 36 Vf, 650 mA	2700 K	2x2400 lm	106 lm/W	0 4 8 - 2 7 2 0 9 1 ◪ S
	3000 K	2x2430 lm	107 lm/W	0 4 8 - 2 7 2 0 0 1 ◪ S
	3500 K	2x2490 lm	110 lm/W	0 4 8 - 2 7 2 0 2 1 ◪ S
	4000 K	2x2550 lm	112 lm/W	0 4 8 - 2 7 2 0 1 1 ◪ S

The data values for the luminous flux of fraction may differ for specific order options by -8%. Luminous flux value refers to colour traffic white. 2 insets necessary, order code only applies to 1 inset

MEDIUM 31°-34°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
2x15.2 W, 36 Vf, 450 mA	2700 K	2x1750 lm	115 lm/W	0 4 8 - 2 7 2 0 9 1 ◪ M
	3000 K	2x1800 lm	118 lm/W	0 4 8 - 2 7 2 0 0 1 ◪ M
	3500 K	2x1840 lm	121 lm/W	0 4 8 - 2 7 2 0 2 1 ◪ M
	4000 K	2x1890 lm	124 lm/W	0 4 8 - 2 7 2 0 1 1 ◪ M
2x22.7 W, 36 Vf, 650 mA	2700 K	2x2410 lm	106 lm/W	0 4 8 - 2 7 2 0 9 1 ◪ M
	3000 K	2x2440 lm	108 lm/W	0 4 8 - 2 7 2 0 0 1 ◪ M
	3500 K	2x2500 lm	110 lm/W	0 4 8 - 2 7 2 0 2 1 ◪ M
	4000 K	2x2560 lm	113 lm/W	0 4 8 - 2 7 2 0 1 1 ◪ M
2x23.8 W, 700 mA	CWD	2x2060 lm	87 lm/W	0 4 8 - 2 7 2 0 E 1 ◪ M

The data values for the luminous flux of fraction may differ for specific order options by -6%. Luminous flux value refers to colour traffic white, matt silver. 2 insets necessary, order code only applies to 1 inset; CWD only for DALI-2; not for DIN-RAIL LED Driver

Order options

COLOUR TEMPERATURE RANGE ◪	
2700 - 6500 K	D
1800 - 4000 K	L

COLOUR ◪	
jet black RAL 9005	1
matt silver	4
traffic white RAL 9016	7
gold dust RAL 260-M	9

FLOOD 39°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
2x15.2 W, 36 Vf, 450 mA	2700 K	2x1660 lm	109 lm/W	048-272091 F
	3000 K	2x1710 lm	113 lm/W	048-272001 F
	3500 K	2x1750 lm	115 lm/W	048-272021 F
	4000 K	2x1790 lm	118 lm/W	048-272011 F
2x22.7 W, 36 Vf, 650 mA	2700 K	2x2290 lm	101 lm/W	048-272091 F
	3000 K	2x2320 lm	102 lm/W	048-272001 F
	3500 K	2x2380 lm	105 lm/W	048-272021 F
	4000 K	2x2430 lm	107 lm/W	048-272011 F


The data values for the luminous flux of fraction may differ for specific order options by -9%. Luminous flux value refers to colour traffic white. 2 insets necessary, order code only applies to 1 inset

WIDE FLOOD 51°-56°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
2x15.2 W, 36 Vf, 450 mA	2700 K	2x1800 lm	118 lm/W	048-272091 W
	3000 K	2x1850 lm	121 lm/W	048-272001 W
	3500 K	2x1890 lm	124 lm/W	048-272021 W
	4000 K	2x1940 lm	127 lm/W	048-272011 W
2x22.7 W, 36 Vf, 650 mA	2700 K	2x2470 lm	109 lm/W	048-272091 W
	3000 K	2x2500 lm	110 lm/W	048-272001 W
	3500 K	2x2560 lm	113 lm/W	048-272021 W
	4000 K	2x2620 lm	116 lm/W	048-272011 W
2x23.8 W, 700 mA	CWD	2x2290 lm	96 lm/W	048-27220E 1 W

2 insets necessary, order code only applies to 1 inset; CWD only for DALI-2; not for DIN-RAIL LED Driver

Electrical mounting accessories (optional)




THROUGH WIRING CONNECTION BOX

TYPE	L·W·H (mm)	ORDER CODE
non DIM cable ø 4 – 12 mm	105·58·30	005-253110
DALI cable ø 4 – 12 mm	105·58·30	005-255110

Linect®-Ready

Mounting accessories (required)



MOUNTING SET with trim 2 lamps for intermediate ceilings, 2-25 mm

L·W·H (mm)	ORDER CODE
218·118·35	048-279831 1

Electrical accessories (required)

POWER SUPPLY PC2

TYPE	INPUT VOLTAGE	EFFICIENCY	L·W·H (mm)	ORDER CODE
450 mA | 21 W | non DIM	198-264 V AC	η 86 %	143·43·30	002-907666
450 mA | 28 W | DALI-2	176-264 V AC	η 85 %	143·43·30	002-907677
700 mA | 28 W | DALI-2	176-264 V AC	η 85 %	143·43·30	002-907776
650 mA | 100 W | non DIM	176-264 V AC	η 92 %	143·43·30	002-907800

Order options


COLOUR	
jet black RAL 9005	1
matt silver	4
traffic white RAL 9016	7
gold dust RAL 260-M	9

COLOUR	
traffic white RAL 9016	7
jet black RAL 9005	8
white aluminium RAL 9006	G

TYPE	INPUT VOLTAGE	EFFICIENCY	L·W·H (mm)	ORDER CODE
650 mA | 28 W | DALI-2	176-264 V AC	η 85 %	143·43·30	0 0 2 - 9 0 7 8 9

2 power supplies for 2 lamps variants necessary

Electrical accessories (optional)



DIN RAIL POWER SUPPLY BASIC 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L·W·H (mm)	ORDER CODE
160 W | PC2	220-240 V AC	η 94 %	72·90·63	0 0 5 - 6 5 2 0 2 1 0

Lifetime >100.000 h @ 120 W, 45°C ambient temp., cascadable max. 3 devices

DIN RAIL LED DRIVER

TYPE	L·W·H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses / DT8 1 adress	36·88·59	0 0 5 - 6 1 2 1 0 3 0

200 -1050 mA settable const. current | 2 × 42 W | 48 V DC | U OUT 10 – 40 V SELV

POWER SUPPLY PRE-WIRED with junction box 28 W, PC2

TYPE	INPUT VOLTAGE	EFFICIENCY	ORDER CODE
450 mA | DALI-2	176-264 V AC	η 85 %	0 0 2 - 9 0 7 6 7 A
650 mA | DALI-2	176-264 V AC	η 85 %	0 0 2 - 9 0 7 8 9 A
700 mA | DALI-2	176-264 V AC	η 85 %	0 0 2 - 9 0 7 7 6 A
450 mA | non DIM	198-264 V AC	η 88 %	0 0 2 - 9 0 7 6 6 A
650 mA | non DIM	198-264 V AC	η 88 %	0 0 2 - 9 0 7 8 0 A
700 mA | non DIM	198-264 V AC	η 88 %	0 0 2 - 9 0 7 7 4 A

2 power supplies for 2 lamps variants necessary

Optical accessories (optional)



HONEYCOMB LOUVER for BO 55 | JUST 55 | SASSO 100

COLOUR	Ø·H (mm)	ORDER CODE
jet black	50·3	0 0 7 - 1 9 6 5 5 9 8