



SASSO 60 round

ceiling

^{EN} Cylindrical ceiling mounted spotlight made of aluminium; surface light inset lacquered; surface housing powder coated; luminaire housing can be attached to mounting plate without tools by interlock; choice of adjustable symmetric or asymmetric radiation characteristic; variants with symmetric radiation characteristic: precise due to high quality lens system; with different beam angles; variants with asymmetric radiation characteristic: high-quality reflector with micro-faceted, aluminum-vaporised surface; COB (Chip on Board) technology for maximum efficiency (ADJUSTABLE); no multiple shadows; efficient LEDs with very good colour rendering; converter integrated into spotlight head

^{IT} Faretto cilindrico in alluminio montato sul soffitto; superficie dell'inserito verniciata; superficie housing verniciata a polv.; corpo illuminante montabile ad appoggio senza attrezzi su piastra di montaggio tramite blocco di sicurezza; a scelta orientabile simmetrico o asimmetrico caratteristiche di emissione; varianti a fascio simmetrico: precisa grazie all'ottica a lente di alta qualità; con diversi angoli di emissione; varianti a fascio asimmetrico: riflettore di alta qualità con superficie a microfaccette e vaporizzata in alluminio; tecnologia COB (Chip on Board) per la massima efficienza (ADJUSTABLE); assenza di ombre multiple; LED efficienti con alta resa cromatica; converter integrato nella testata del faretto

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90 / 2 SDCM, 3 SDCM
 UGR ≤ 10 , UGR ≤ 13 , UGR ≤ 16 ,
 UGR ≤ 19
 fino a 105 lm/W
 L80 / 50000 h, L85 / 50000 h,
 L90 / 50000 h
 DALI-2, non DIM
 IP20

Types



Colore



Colore interno



Distribuzione della luce



wallwasher and
wallwasher
floor inset



glare control
(UGR ≤ 16)




easy mounting
no visible
screws



Colour Warm
Dimming 1800
– 3000 K
(optional)



CRI ≥ 95 2
SDCM
(optional)



SASSO 60 round adjustable ceiling



SPOT CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.4 W	2700 K	735 lm	71 lm/W	0 4 8 - 3 1 1 0 9 S
	3000 K	759 lm	73 lm/W	0 4 8 - 3 1 1 0 0 S
	3500 K	775 lm	75 lm/W	0 4 8 - 3 1 1 0 2 S
	4000 K	799 lm	77 lm/W	0 4 8 - 3 1 1 0 1 S

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour traffic white.

MEDIUM CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.2 W	2700 K	874 lm	86 lm/W	0 4 8 - 3 1 1 0 9 M
	3000 K	907 lm	89 lm/W	0 4 8 - 3 1 1 0 0 M
	3500 K	927 lm	91 lm/W	0 4 8 - 3 1 1 0 2 M
	4000 K	946 lm	93 lm/W	0 4 8 - 3 1 1 0 1 M

The data values for the luminous flux may differ for specific order options by -9%. Luminous flux value refers to inner colour traffic white.

FLOOD CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.2 W	2700 K	831 lm	81 lm/W	0 4 8 - 3 1 1 0 9 F
	3000 K	862 lm	85 lm/W	0 4 8 - 3 1 1 0 0 F
	3500 K	880 lm	86 lm/W	0 4 8 - 3 1 1 0 2 F
	4000 K	899 lm	88 lm/W	0 4 8 - 3 1 1 0 1 F

The data values for the luminous flux may differ for specific order options by -14%. Luminous flux value refers to inner colour traffic white.

WIDE FLOOD CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.2 W	2700 K	876 lm	86 lm/W	0 4 8 - 3 1 1 0 9 W
	3000 K	909 lm	89 lm/W	0 4 8 - 3 1 1 0 0 W
	3500 K	928 lm	91 lm/W	0 4 8 - 3 1 1 0 2 W
	4000 K	948 lm	93 lm/W	0 4 8 - 3 1 1 0 1 W

The data values for the luminous flux may differ for specific order options by -11%. Luminous flux value refers to inner colour traffic white.



SASSO 60 round wallwasher ceiling



WALLWASHER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
9.5 W	2700 K	576 lm	61 lm/W	0 4 8 - 3 7 1 0 9 A
	3000 K	626 lm	66 lm/W	0 4 8 - 3 7 1 0 0 A
	3500 K	626 lm	66 lm/W	0 4 8 - 3 7 1 0 2 A
	4000 K	650 lm	68 lm/W	0 4 8 - 3 7 1 0 1 A

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour matt silver, traffic white.

Order options

CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white	7
				gold dust	9



SASSO 60 round wallwasher/floor ceiling



WALLWASHER FLOOR CRI ≥ 90



SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
10.4 W	2700 K	1000 lm	96 lm/W	0 4 8 - 3 7 1 0 9 W
	3000 K	1050 lm	101 lm/W	0 4 8 - 3 7 1 0 0 W
	3500 K	1050 lm	101 lm/W	0 4 8 - 3 7 1 0 2 W
	4000 K	1090 lm	105 lm/W	0 4 8 - 3 7 1 0 1 W

Order options

CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white	7
				gold dust	9

The Silo, Copenhagen

Danimarca

Architetto


COBE Architects

Lighting Design

anker & co

Fotografo

Kris Dekeijser

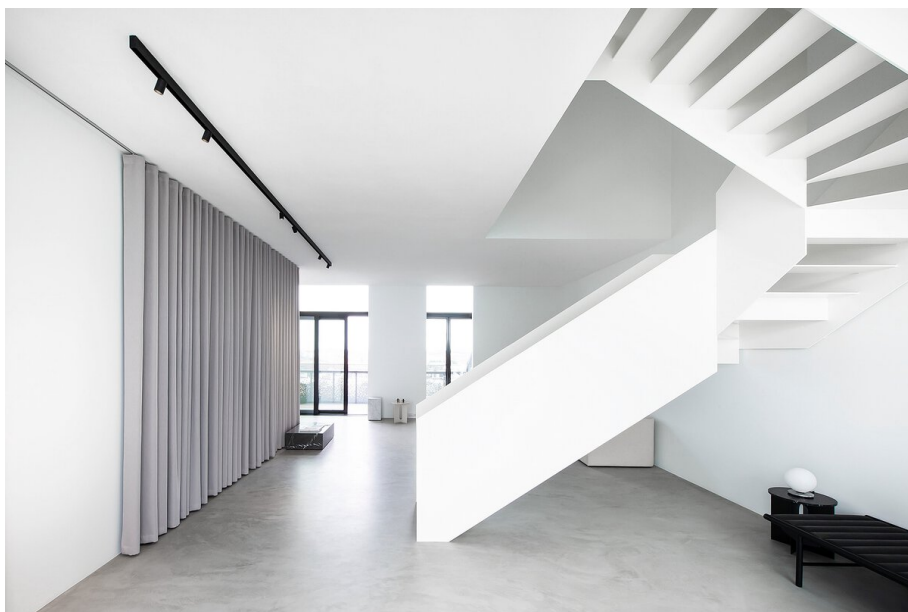

Prodotti utilizzati



**SASSO 60 round
ceiling**



**MOVE IT 25 surface /
suspended system**





**SASSO 60 round
recessed 1 lamp**



**JUST 45 MOVE IT
25 / 25 S / 45**



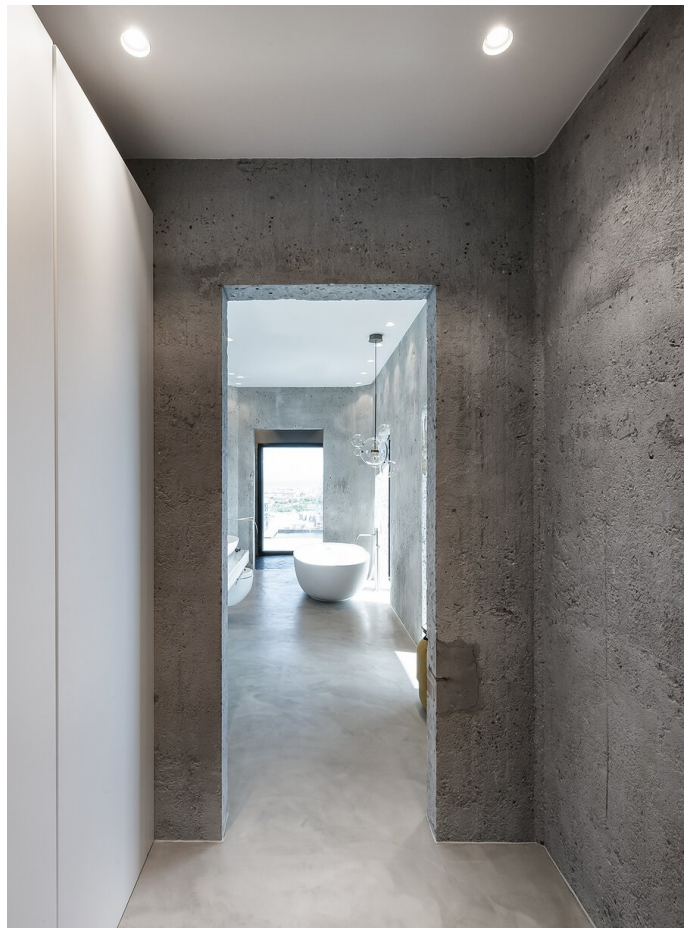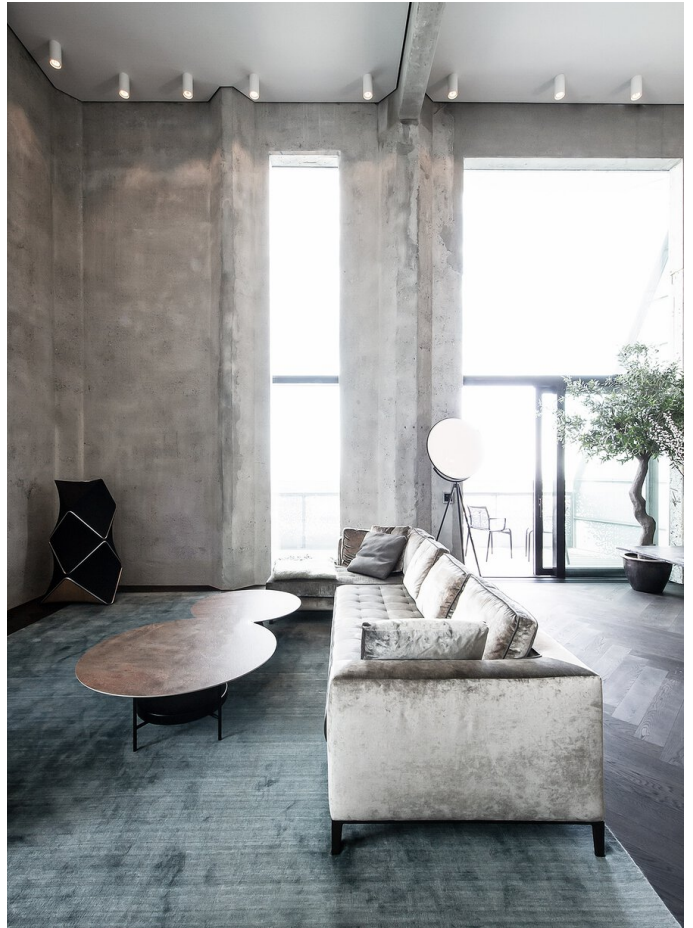



Bank Raiffeisen, Aigle

Svizzera

Architetto

: ABA PARTENAIRES SA

Fotografo

Julie Masson



Prodotti utilizzati



SASSO 60 round ceiling



INO circle suspended ceiling

