


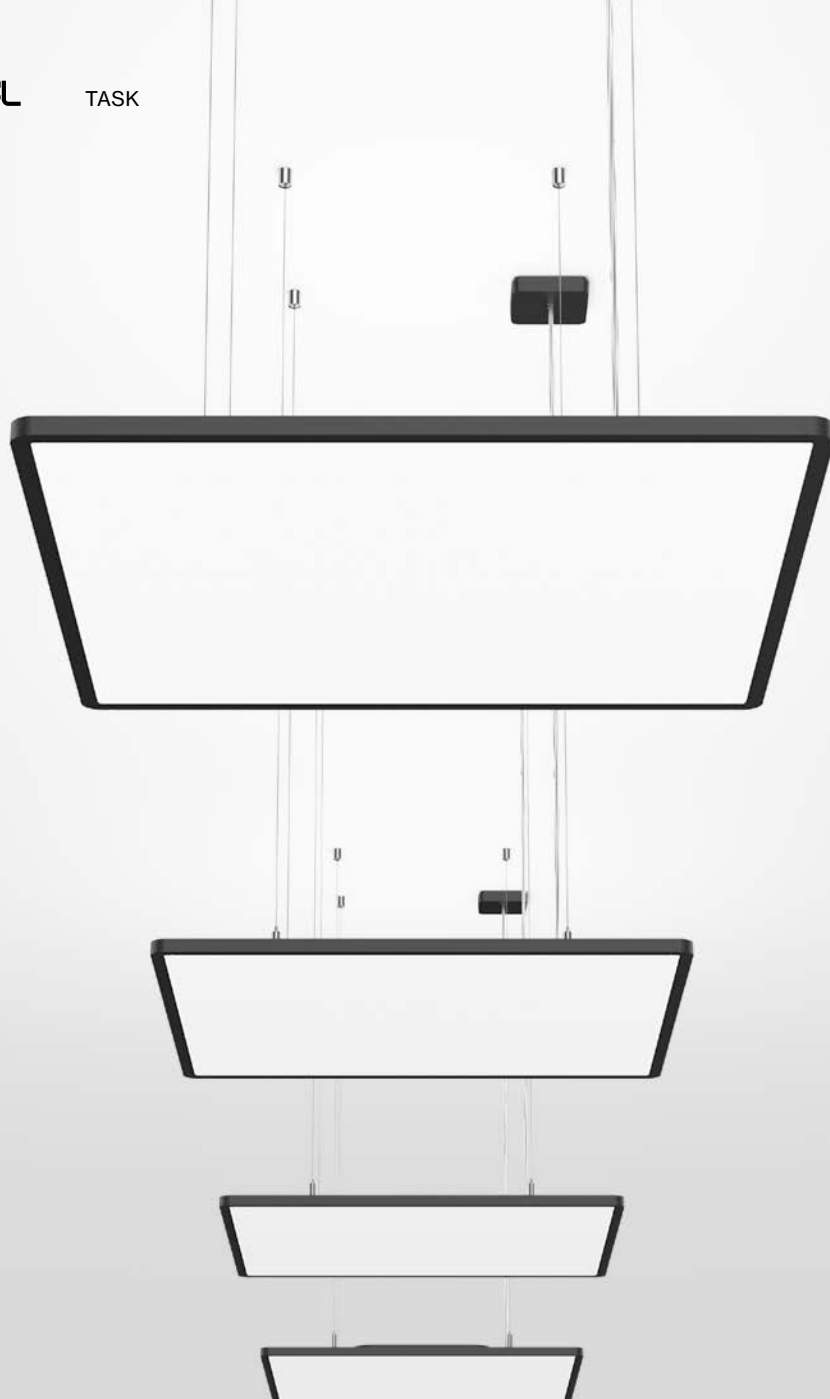

TASK square

suspended


EN Square housing made of aluminium with rounded edges; ultra low-profile design (only 15 mm); powder coated; pendant fitting with cable suspension (4 cables); with integrated tool-less suspension height adjustment; incl. transparent feed; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; light control via highly reflective reflector material; optional: indirect component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-eff. LEDs – very good colour rendering; canopy for through wiring; sound absorbing accessories available

IT Corpo illuminante quadrato in alluminio con bordi arrotondati; forma ultrapiatta (solo 15 mm); verniciatura a polvere; sospeso con cavo a sospensione (4 funi); altezza regolabile sull'apparecchio, senza utensili; incl. cavo di alimentazione trasparente; distribuzione della luce diretta con sistema LGP-Body (Light Guiding Prism); luce convogliata lateralmente e direzionata in basso tramite incisione laser; direzionamento della luce con materiale del riflettore altamente riflettente; in opzione: percentuale indiretta con piastre a flusso luminoso potenziato e massima illuminazione del soffitto; illuminazione assolutamente omogenea; LED ad efficienza energetica con elevata resa cromatica; rosone per cablaggio passante; disponibile accessorio fonoassorbente


Quickinfo

3000 K, 4000 K
CRI ≥ 90 , 3 SDCM
UGR ≤ 19 / $65^\circ \leq 3000$ cd/m²
up to 137 lm/W
L90 @ 50 000 h
DALI-2
microprismatic (UGR ≤ 19)

Types




Colours



Light distributions



DiiA® standards
251, 252, 253




DIN EN 12464-1
UGR ≤ 19



flat design
(15 mm)



acoustic
elements (p. 456)



CRI ≥ 98
XPECTRUM

Order options

SUSPENSION

cable 1500 mm

COLOUR TEMPERATURE

3000K	0
4000K	1

CONTROL

DALI-2

MATERIAL COLOUR

○ pure white RAL 9010	7
● jet black RAL 9005	8
● special colours* p. 992	X

*canopy always in white

LIGHT OPTIC COVER

microprismatic (UGR ≤ 19)

Options on request


COLOUR RENDERING INDEX

CRI ≥ 80

CRI ≥ 98 XPECTRUM

CONTROL

Casambi



TASK 450 square suspended



CRI ≥ 90	UGR ≤ 19	cd/m ² ≤ 3000	RG0 IEC 62471	DALI 1ADDR.	220-240V	X-PERT	X-PERT
----------	----------	--------------------------	---------------	-------------	----------	--------	--------

DIRECT


SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
15W	3000K	1880lm	0 5 9 - 2 2 1 1 :: 3 ■ K
	4000K	2000lm	



CRI ≥ 98	UGR ≤ 19	RG0 IEC 62471	DALI 1ADDR.	220-240V	X-PERT	X-PERT
----------	----------	---------------	-------------	----------	--------	--------

DIRECT / INDIRECT POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
35W	3000K	↓ 2910 / ↑ 1470 lm	0 5 9 - 2 2 3 1 :: 3 ■ K
	4000K	↓ 3100 / ↑ 1570 lm	



TASK 600 square suspended



CRI ≥ 90	UGR ≤ 19	cd/m ² ≤ 3000	RG0 IEC 62471	DALI 1ADDR.	220-240V	X-PERT	X-PERT
----------	----------	--------------------------	---------------	-------------	----------	--------	--------

DIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
27.3W	3000K	3510lm	0 5 9 - 2 2 1 2 :: 3 ■ K
	4000K	3730lm	




CRI ≥ 90	UGR ≤ 19	RG0 IEC 62471	DALI 1ADDR.	220-240V	X-PERT	X-PERT
----------	----------	---------------	-------------	----------	--------	--------


DIRECT / INDIRECT POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
57W	3000K	↓ 5660 / ↑ 1530 lm	0 5 9 - 2 2 3 2 :: 3 ■ K
	4000K	↓ 6020 / ↑ 1620 lm	

Light distributions




TASK 450 microprismatic
direct/indirect power



TASK 600 microprismatic
direct/indirect power

LUMINOUS FLUX value calculated for
CRI ≥ 90, colour white, cover microprismatic

Technical data



TASK 600 square suspended

57W, 4000K, direct/indirect power

ROOM VALUES

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8
Suspension height	2.25 m

CALCULATION SURFACE

Surface dimensions	1.6 × 0.8 m
Surface height	0.75 m
Average illuminance (E _m)	> 500 lx
Uniformity (U ₀)	> 0.6

GLARE EVALUATION

Table Classification X=4H Y=8H S=0.25H	
UGR transversal	≤ 19
UGR axial	≤ 19