


XAL


TASK

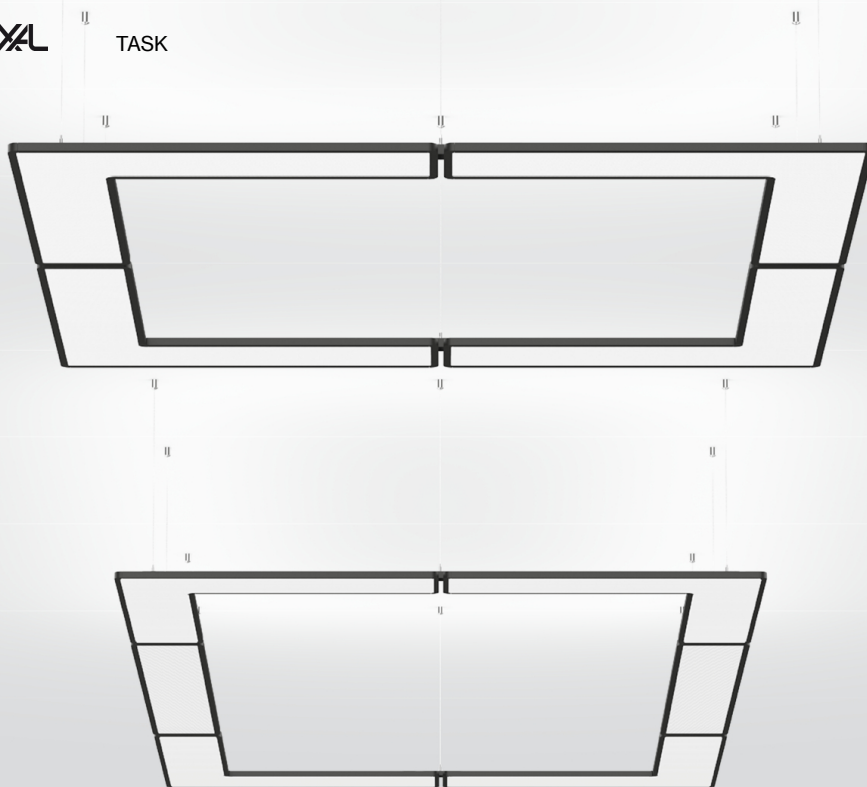

Quickinfo

4000 K
 CRI ≥ 90 / 3 SDCM
 UGR ≤ 19
 fino a $\downarrow$ 15,500 lm / $\uparrow$ 8,050 lm
 fino a 120 lm/W
 L90 / 50000 h
 DALI-2
 Microprismatic
 IP20

Types



Colore



Distribuzione della luce



TASK angular

suspended

EN Rectangular suspended luminaire, consisting of single L-shaped or rectangular elements; Luminaire housing made of aluminium with rounded edges; ultra low-profile design (only 15 mm); surface powder coated; cable suspension, tool-less height adjustment; convenient quick mounting system without tools; incl. feeder cable; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect light component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; canopy for through wiring; optional acoustic elements available


IT Corpo illuminante a sospensione di forma rettangolare, composto da singoli elementi a L o rettangolari; Corpo illuminante in alluminio con bordi arrotondati; forma ultrapiatta (solo 15 mm); verniciatura a polvere; cavo regolabile in altezza senza attrezzi; pratico sistema di montaggio rapido senza utensili; incl. cavo di alimentazione; distribuzione della luce diretta con sistema LGP-Body (Light Guiding Prism); luce convogliata lateralmente e direzionata in basso tramite incisione laser; percentuale indiretta con piastre a flusso luminoso potenziato e massima illuminazione del soffitto; illuminazione assolutamente omogenea; LED ad efficienza energetica con elevata resa cromatica; rosone per cablaggio passante; in opzione elementi acustici disponibili




DiiA® standards
 251, 252, 253




clicksystem



microprismatic
 UGR ≤ 19



CRI ≥ 98
XPECTRUM
 (optional)



TASK angular suspended

CRI

≥ 90

UGR

≤ 19

cd/m²

≤ 3000

220-240 V

DALI-2



8 ADDR.

X-PERT

X-PERT

DIRECT / INDIRECT POWER DALI-2, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
197.0 W	4000 K	↓15500/↑18050 lm	120 lm/W	0 5 9 - 5 2 8 3 1 3 K



TASK long angular suspended

CRI

≥ 90

220-240 V

DALI-2


10 ADDR.

X-PERT


X-PERT

DIRECT / INDIRECT POWER DALI-2, CRI ≥ 90

COLOUR TEMP.	ORDER CODE
4000 K	0 5 9 - 5 2 8 4 1 3 K



Planning Information



TASK long angular, 280W, 4000K,
direct/indirect power

ROOM VALUES	
Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8
Suspension height	2.25 m

CALCULATION SURFACE	
Surface dimensions	3.2 × 1.2 m
Surface height	0.75 m
Average illuminance (E _m)	> 500 lx
Uniformity (U ₀)	> 0.6

GLARE EVALUATION	
Table Classification X=4H Y=8H S=0.25H	
UGR transversal	≤ 19
UGR axial	≤ 19

Order options

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8

Community Windpower, Frodsham


Regno Unito

Fotografo

Paul Karalius




Prodotti utilizzati



**TASK angular
suspended**



**TASK round
suspended**



**TASK circle
suspended**

