

SONIC

free standing

EN Free standing luminaire with conical luminaire head in die-cast aluminium; powder coated; round aluminium downpipe arranged centralised or decentralised; round pedestal with recess for table base; direct/indirect light distribution; indirect component – special PCBs for increased luminous flux (max. ceiling illumination); optional: indirect component with special, inclined PCBs for asymmetric radiation characteristic; completely homogeneous illumination; energy-eff. LEDs – very good colour rendering; incl. connection cable (3m) with safety plug; acoustic elements made of high-quality, self-supporting, recycled PET felt (high acoustic performance by doubling the material) or as an acoustically effective lampshade (large selection of colours) with sound absorbing properties


IT Piantana con testata conica in alluminio pressofuso; verniciatura a polvere; stelo rotondo in alluminio a scelta con disposizione centrale o laterale; piedistallo rotondo con apertura per piede tavolo; emissione diretta/indiretta; comp. luce indir. – PCB speciali per mass. flusso lum. (illum. massima del soffitto); opzionale: componente di luce indiretta con piastre proprie inclinate per un'emissione asimmetrica; illuminazione assolutamente omogenea; LED a risp. energ. – ottima resa cromatica; incl. cavo di collegamento (3m) con spina Schuko; elementi acustici in feltro prodotto con PET riciclato di alta qualità e autoportante (alte prestazioni acustiche grazie al materiale doppiato) o come paralume acusticamente efficace (ampia scelta di colori) con proprietà fonoassorbenti

Quickinfo

3000 K, 4000 K
 CRI ≥ 80, 3 SDCM
 UGR ≤ 19 / 65° ≤ 3000 cd/m²
 up to 152 lm/W
 L90 @ 50 000h
 non DIM, touch DIM on pole
 brightness & presence sensor
 microprismatic (UGR ≤ 19)

acoustic elements
 ♻️ from recycled material
 🔥 available as B-s1, d0


Types

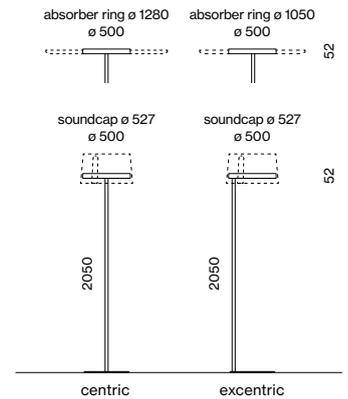

Luminaire colours



Acoustic colours

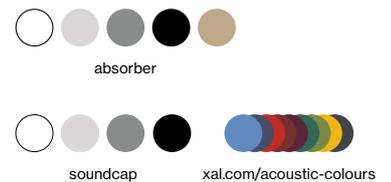

Light distribution



DiiA® standards
 251, 252, 253



microprismatic
 (UGR ≤ 19)



sensor version
 available



direct/indirect
 illumination

Order options

COLOUR TEMPERATURE	☐☐
3000K	5
4000K	6

CONTROL	⬆️⬆️
non DIM switch	1
touch DIM on pole	5
ESSENTIAL sensor (brightness & presence)	7

LUMINAIRE COLOUR	☑️
○ pure white RAL 9010	7
● black grey RAL 7021	6
🌈 special colours ➡ p.992	X

ABSORBER COLOUR	■
○ white	W
● marble grey	D
● anthracite	B
● black	L
● limestone	S

SOUNDCAP COLOUR	☐
○ white	W
● marble grey	D
● felt grey	G
● black	L
🌈 special colours	X


LIGHT OPTIC COVER	
microprismatic (UGR ≤ 19)	

Options on request



COLOUR RENDERING INDEX	
CRI ≥ 90	

CONTROL	
cluster network DIM	
dynamic daylight control (BPI)	

Light distributions

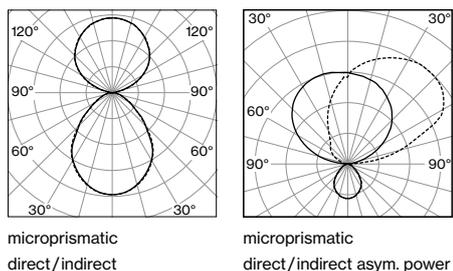

LUMINOUS FLUX value calculated for CRI ≥ 80, colour white, cover microprismatic



SONIC centric pole free standing



DIRECT/INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
69W	3000K	↓ 5000/± 4940lm	0 5 9 - 7 9 2 1 ☐☐☐☐ P
	4000K	↓ 5290/± 5230lm	

DIRECT/INDIRECT ASYMMETRIC POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
105W	3000K	↓ 4260/± 9840lm	0 5 9 - 7 9 4 1 ☐☐☐☐ P
	4000K	↓ 4510/± 10500lm	

SONIC excentric pole free standing




DIRECT/INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
69W	3000K	↓ 5000/± 4940lm	0 5 9 - 7 9 2 2 ☐☐☐☐ P
	4000K	↓ 5290/± 5230lm	

DIRECT/INDIRECT ASYMMETRIC POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
105W	3000K	↓ 4260/± 9840lm	0 5 9 - 7 9 4 2 ☐☐☐☐ P
	4000K	↓ 4510/± 10500lm	

Technical data

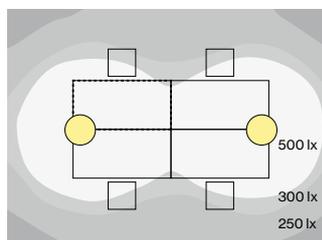


SONIC excentric pole free standing
69W, 4000K, direct/indirect

ROOM VALUES	
Room dimensions	5,4 × 4 × 2,8m
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8

CALCULATION SURFACE	
Surface dimensions	1,6 × 0,8
Surface height	0,75
Average illuminance (E _m)	> 500 lx
Uniformity (U ₀)	> 0,6

GLARE EVALUATION	
Table Classification X=4H Y=8H S=0.25H	
UGR transversal	≤ 19
UGR axial	≤ 19

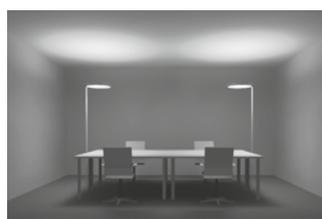

Acoustic elements

SONIC ABSORBER ring

TYPE	Ø-H (mm)	ORDER CODE
1050	1050-50	0 5 9 - 7 7 1 1 2 1 ■
1280	1280-50	0 5 9 - 7 7 1 1 1 1 ■

only in combination with SONIC suspended or SONIC free standing

SONIC SOUNDCAP

TYPE	Ø-H (mm)	ORDER CODE
soundcap	527-300	0 5 9 - 7 7 3 1 1 1 ☐

only in combination with SONIC suspended or SONIC free standing;
bracket colour white; other bracket colours on request;

