



TASK S

suspended


EN Rectangular housing made of aluminium with rounded edges; ultra low-profile design (only 15mm); surface powder coated; 1500 mm cable suspension, tool-less height adjustment; incl. feed; direct or direct/indirect light distribution by LGP body (Light Guiding Prism); side coupled light, directed downwards or up and down by laser engraving; light control via highly reflective reflector material; optional: indirect component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; canopy with 2 cable openings and plug-in terminal for through wiring

IT Corpo illuminante rettangolare in alluminio con bordi arrotondati; forma ultrapiatta (solo 15 mm); verniciatura a polvere; cavo di 1500 mm regolabile in altezza senza attrezzi; incl. cavo di alimentazione; distribuzione della luce diretta o diretta/indiretta con sistema LGP-Body (Light Guiding Prism); luce convogliata lateralmente e direzionata in basso o in basso e su tramite incisione laser; direzionamento della luce con materiale del riflettore altamente riflettente; in opzione: percentuale indiretta con piastre a flusso luminoso potenziato e massima illuminazione del soffitto; illuminazione assolutamente omogenea; LED ad efficienza energetica con elevata resa cromatica; rosone con 2 ingressi cavi e morsetto per cablaggio passante

Quickinfo

3000 K, 4000 K, TW
 CRI ≥ 90, 3 SDCM
 UGR ≤ 16 / 65° ≤ 3000 cd/m²
 up to 126 lm/W
 L95 @ 50 000 h
 DALI-2
 brightness & presence sensor
 microprismatic (UGR ≤ 19)

Types

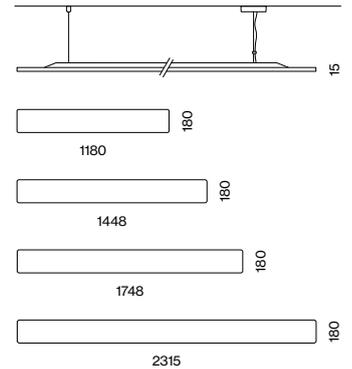

Colours



Light distributions



DiiA® standards
 251, 252, 253



direct/indirect
 illumination




system solution
 (p. 812)



DIN EN 12464-1
 UGR ≤ 19



tunable white
 2700–6500 K



CRI ≥ 98
 XPECTRUM

Order options

SUSPENSION

cable 1500 mm

COLOUR TEMPERATURE

3000K 0

4000K 1

tunable white 2700–6500K*

*DALI-2 DT8; CRI≥80

3000K + TW 2700–6500K

4000K + TW 2700–6500K

DALI-2 DT8 (separately controllable)

CONTROL

DALI-2 3

ESSENTIAL sensor* 7

(brightness & presence)

*version with sensor: length + 9 mm

MATERIAL COLOUR

○ pure white RAL 9010 7

● jet black RAL 9005 8

● special colours* X

*canopy always in white

LIGHT OPTIC COVER

microprismatic (UGR≤19)

Order options

COLOUR RENDERING INDEX

CRI≥80


CRI≥98 XPECTRUM

Light distribution



microprismatic
direct/indirect power

LUMINOUS FLUX value calculated for
CRI≥90, colour white, cover microprismatic



TASK S suspended



DIRECT / INDIRECT SOFT


SYS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
19.5 W	3000 K	↓ 1900 / ± 327 lm	1180	0 5 9 - 5 2 5 4 :: ◆ □ K
	4000 K	↓ 2020 / ± 347 lm		
24.4 W	3000 K	↓ 2380 / ± 408 lm	1448	0 5 9 - 5 2 5 5 :: ◆ □ K
	4000 K	↓ 2540 / ± 435 lm		
29.2 W	3000 K	↓ 2860 / ± 490 lm	1748	0 5 9 - 5 2 5 6 :: ◆ □ K
	4000 K	↓ 3040 / ± 521 lm		
39 W	3000 K	↓ 3810 / ± 653 lm	2315	0 5 9 - 5 2 5 8 :: ◆ □ K
	4000 K	↓ 4050 / ± 695 lm		



DIRECT / INDIRECT POWER

SYS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
29.6 W	3000 K	↓ 1890 / ± 1540 lm	1180	0 5 9 - 5 2 6 4 :: ◆ □ K
	4000 K	↓ 2010 / ± 1640 lm		
22.3 W (2×DALI)	3000 K	↓ 1440 lm	1180	0 5 9 - 5 2 D 4 0 3 □ K
	2700–6500 K	± 1230 lm		
22.3 W (2×DALI)	4000 K	↓ 1560 lm	1180	0 5 9 - 5 2 D 4 1 3 □ K
	2700–6500 K	± 1230 lm		
36 W (2×)	2700–6500 K	± 4010 lm	1180	0 5 9 - 5 2 6 4 D ◆ □ K
37 W	3000 K	↓ 2360 / ± 1920 lm	1448	0 5 9 - 5 2 6 5 :: ◆ □ K
	4000 K	↓ 2520 / ± 2050 lm		
27.9 W (2×DALI)	3000 K	↓ 1800 lm	1448	0 5 9 - 5 2 D 5 0 ◆ □ K
	2700–6500 K	± 1540 lm		
27.9 W (2×DALI)	4000 K	↓ 1950 lm	1448	0 5 9 - 5 2 D 5 1 ◆ □ K
	2700–6500 K	± 1540 lm		
44 W (2×)	2700–6500 K	± 5010 lm	1448	0 5 9 - 5 2 6 5 D ◆ □ K
44 W	3000 K	↓ 2840 / ± 2310 lm	1748	0 5 9 - 5 2 6 6 :: ◆ □ K
	4000 K	↓ 3020 / ± 2460 lm		
33 W (2×DALI)	3000 K	↓ 2160 lm	1748	0 5 9 - 5 2 D 6 0 ◆ □ K
	2700–6500 K	± 1840 lm		
33 W (2×DALI)	4000 K	↓ 2330 lm	1748	0 5 9 - 5 2 D 6 1 ◆ □ K
	2700–6500 K	± 1840 lm		
53 W (2×)	2700–6500 K	± 6010 lm	1748	0 5 9 - 5 2 6 6 D ◆ □ K
59 W	3000 K	↓ 3780 / ± 3080 lm	2315	0 5 9 - 5 2 6 8 :: ◆ □ K
	4000 K	↓ 4030 / ± 3270 lm		
45 W (2×DALI)	3000 K	↓ 2880 lm	2315	0 5 9 - 5 2 D 8 0 ◆ □ K
	2700–6500 K	± 2460 lm		
45 W (2×DALI)	4000 K	↓ 3110 lm	2315	0 5 9 - 5 2 D 8 1 ◆ □ K
	2700–6500 K	± 2460 lm		
71 W (2×)	2700–6500 K	± 8010 lm	2315	0 5 9 - 5 2 6 8 D ◆ □ K

Technical data

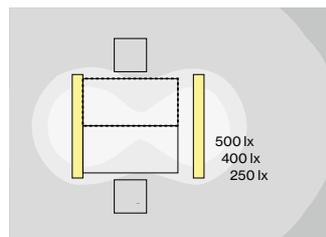

TASK S suspended, 1748 mm
44 W, 4000 K, direct/indirect power

ROOM VALUES

Room dimensions 5,4 × 4 × 2,8 m
Reflection factor 0,7 | 0,5 | 0,2
Maintenance factor 0,8
Suspension height 2,25 m

CALCULATION SURFACE

Surface dimensions 1,6 × 0,8 m
Surface height 0,75 m
Average illuminance (E_m) > 500 lx
Uniformity (U_0) > 0,6

GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0,25H
UGR transversal ≤ 19
UGR axial ≤ 19

