



FRAME 60 system

recessed with trim


^{EN} Luminaire housing made of extruded aluminium; recessed luminaire with trim; designed for continuous lighting systems; suitable for ceiling thickness of 8-25 mm; surface powder coated; luminaire profile for mounting available in advance; remaining luminaire components mounted without tools; light inset consisting of highly reflective coated extruded profile for improved thermal management; option: lighting module is versatile in length; HPO (High Performance Opal) cover for uniform illumination; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; wall-washer light inset; energy-efficient LEDs with very good colour rendering

Il Corpo illuminante in profilo di alluminio estruso; apparecchio da incasso con bordo perimetrale; per sistemi di file continue; per soffitti di spessore 8-25 mm; verniciatura a polvere; profilo consegnabile in anticipo; restanti componenti montabili senza utensili; unità d'illuminazione in profilo di alluminio estruso con verniciatura altamente riflettente per gestione termica migliorata; in opzione unità luminosa accorciabile con flessibilità; diffusore HPO (High Performance Opal) per un'illuminazione omogenea; rifrattore in PMMA a microprismi incl. pellicola di diffusione per ridurre la luminanza mantenendo l'illuminazione omogenea; inserto luminoso wallwasher; LED ad efficienza energetica con elevata resa cromatica

Quickinfo

3000 K, 4000 K, TW
 CRI ≥ 80, CRI ≥ 90, 3 SDCM
 up to 2760 lm/m
 up to 125 lm/W
 L90 @ 50 000 h
 non DIM, DALI-2
 opal, microprismatic (UGR ≤ 19)

Types



Colours



Light distributions



microp. opal




DiiA® standards
 251, 252, 253



single luminaire
 (p. 520)




wallwasher
 inset (p. 944)



concrete install.
 housing (p. 946)




flexible
 inset



microprismatic
 UGR ≤ 19



tunable white
 2700-6500 K



CRI ≥ 98
 XPECTRUM

Order options

| | |
|-----------------|---|
| LED TYPE | |
| mid lumen | L |
| high lumen | M |

| | |
|----------------------------|---|
| COLOUR TEMPERATURE | |
| 3000 K (CRI \geq 90) | 0 |
| 4000 K (CRI \geq 90) | 1 |
| 3000 K (CRI \geq 80) | 5 |
| 4000 K (CRI \geq 80) | 6 |
| tunable white 2700–6500 K* | |
| *DALI-2 DT8 | |

| | |
|--------------------------|---|
| CONTROL | |
| non DIM | 1 |
| DALI-2 (only high lumen) | 3 |

| | |
|---|---|
| MATERIAL COLOUR | |
| <input type="radio"/> traffic white RAL 9016 | 7 |
| <input checked="" type="radio"/> white aluminium RAL 9006 | G |

| | |
|---------------------------------|---|
| LIGHT OPTIC COVER | |
| opal high performance | H |
| microprismatic | Z |
| microprismatic (UGR \leq 19)* | G |
| blind cover** | B |

*UGR \leq 19 only with mid lumen
**only for channel corner 90°

| | |
|------------------------|-------|
| EMERGENCY LIGHT | |
| 1h Accupack | N L 1 |
| 3h Accupack | N L 3 |

Options on request

COLOUR RENDERING INDEX

CRI \geq 98 XPECTRUM

INSTALLATION CHANNEL


curve

CONNECTOR

X- and T-connector

LUMINOUS FLUX value calculated for
CRI \geq 80, colour white, cover opal
microprismatic -13%

FRAME 60 trim






INSTALLATION CHANNEL / CORNER 90°

| TYPE | L (mm) | ORDER CODE |
|----------------------------|---------|---------------------|
| channel | 1172 | 035-0123 |
| channel | 1472 | 035-0153 |
| channel | 3000 | 035-0303 |
| channel | custom | E 8 2 1 4 0 |
| channel corner 90° + cover | 144x144 | 035-1263 |

LIGHT OPTIC COVER / BLIND COVER

| TYPE | L (mm) | ORDER CODE |
|-------------------|--------|-----------------------|
| linear | 1171 | 006-16122 |
| linear | 1470 | 006-16152 |
| linear | 2997 | 006-16302 |
| linear | custom | E 8 0 6 3 0 0 |
| continuous linear | 6000 | 006-23061H |
| continuous linear | 25000 | 006-23251H |
| blind cover | 3000 | 006-1830 |
| blind cover | custom | E 8 0 6 3 0 |



LIGHT INSET 60

| SYSTEM POWER (MID/HIGH LUMEN) | L (mm) | ORDER CODE |
|-------------------------------|-----------|------------|
| 8.7 / 13.8 W | 571 | 007-93 |
| 13 / 20.6 W | 871 | 007-93 |
| 15.3 / 27.5 W | 1171 | 007-93 |
| 19.2 / 34 W | 1463 | 007-93 |
| 31 / 55 W | 2341 | 007-93 |
| 38 / 68 W | 2997 | 007-93 |
| flexible inset 15.3 / 27.5 W | 660-1171 | 007-93 |
| flexible inset 31 / 55 W | 1903-2341 | 007-93 |

| COVER | COLOUR TEMP. | SYSTEM POWER | DELIVERED LUMENS | EFFICACY |
|-------------------|--------------|--------------|------------------|----------|
| mid lumen / opal | 3000 K | 14 W/m | 1540 lm/m | 118 lm/W |
| high performance | 4000 K | | 1640 lm/m | 125 lm/W |
| high lumen / opal | 3000 K | 24 W/m | 2540 lm/m | 110 lm/W |
| high performance | 4000 K | | 2700 lm/m | 116 lm/W |

LIGHT INSET 60 tunable white 2700–6500 K

| SYSTEM POWER | L (mm) | ORDER CODE |
|--------------|--------|-------------|
| 21.7 W | 871 | 007-9333D37 |
| 29 W | 1171 | 007-9334D37 |
| 36 W | 1463 | 007-9335D37 |
| 58 W | 2341 | 007-9338D37 |

Accessories

END CAPS




| TYPE | ORDER CODE |
|-----------------|------------|
| end caps (pair) | 035-1313 |

LINEAR CONNECTOR / THROUGH WIRE



| TYPE | ORDER CODE |
|---|--------------|
| linear connector (1 piece) | 005-40046 |
| linear connector (10 pieces) | 005-40046.10 |
| opal cover linear connector | 006-14000 |
| through wire 3 × 1.5 mm ² (non DIM, 10 pieces) | 004-90003 |
| through wire 5 × 1.5 mm ² (DALI-2, 10 pieces) | 004-90005 |

MOUNTING BRACKET



| TYPE | CEILING THICKNESS (mm) | ORDER CODE |
|------------------------------|------------------------|--------------|
| mounting bracket (1 piece) | 8-25 | 035-10200 |
| mounting bracket (25 pieces) | 8-25 | 035-10200.25 |

number of brackets required: length of your system in metres+1



WALLWASHER

inset 60/100


EN Lighting module with specially computed, asymmetrical high gloss reflector for homogeneous vertical lighting; lighting module in aluminium, powder coated, installation without tools

IT Unità luminosa con riflettore brillantato asimmetrico ottimizzato per illuminazione verticale omogenea; unità luminosa in alluminio verniciato a polvere, montaggio senza utensili

Quickinfo

3000K, 4000K
CRI ≥ 80, 3 SDCM
up to 96lm/W
L80 @ 50000h
non DIM, DALI-2

Types



Colours



Light distribution



wall washer

Order options

| | |
|---------------------------|----|
| COLOUR TEMPERATURE | ☐☐ |
| 3000K | 5 |
| 4000K | 6 |


| | |
|----------------|------|
| CONTROL | ⬆️⬆️ |
| non DIM | 1 |
| DALI-2 | 3 |

| | |
|----------------------------|----|
| MATERIAL COLOUR | ☑️ |
| ○ pure white RAL 9010 | 7 |
| ● white aluminium RAL 9006 | G |
| ● jet black RAL 9005 | 8 |

LIGHT OPTIC


wallwasher

Planning information



MOUNTING DISTANCE

| | |
|---------------|---------------|
| H (mm) | A (mm) |
| 2750 | 900 |
| 3000 | 1000 |
| 3500 | 1200 |



INSET 60 wallwasher




LIGHT INSET only for recessed or surface mounting

| SYSTEM POWER | L (mm) | ORDER CODE |
|--------------|--------|---------------|
| 10.6 W | 571 | 007-9042 ☐☐☐☐ |
| 14 W | 871 | 007-9043 ☐☐☐☐ |
| 18.7 W | 1171 | 007-9044 ☐☐☐☐ |
| 28 W | 1471 | 007-9045 ☐☐☐☐ |

Technical data

| SYSTEM POWER | COLOUR TEMPERATURE | DELIVERED LUMENS | EFFICACY |
|--------------|--------------------|------------------|----------|
| 17 W/m | 3000 K | 1960 lm/m | 121 lm/W |
| | 4000 K | 2070 lm/m | 128 lm/W |

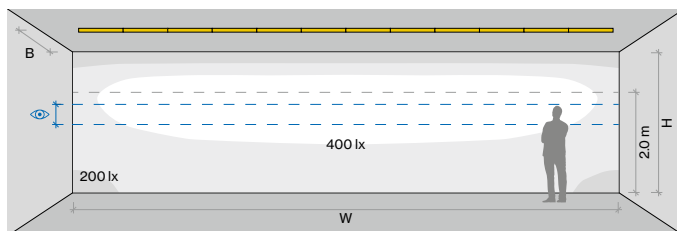



INSET 60 wallwasher, 18.7 W, 3000 K

ROOM VALUES

| | |
|-----------------------------|------------------------|
| Wall dimensions | H = 2.8 m W = 10.8 m |
| Distance to wall | B = 1.3 m |
| Distance between luminaires | continuous |
| Reflection factor | 0.7 0.5 0.2 |
| Maintenance factor | 0.8 |

CALCULATION SURFACE

| | |
|--------------------|-----------------|
| Surface dimensions | 10.8 × 2.8 m |
| Surface height | 0 – 2.8 m |
| Eye level | 1.35 m – 1.75 m |



INSET 100 wallwasher



LIGHT INSET

| SYSTEM POWER | L (mm) | ORDER CODE |
|--------------|--------|---------------|
| 20 W | 571 | 007-9052 ☐☐☐☐ |
| 30 W | 871 | 007-9053 ☐☐☐☐ |
| 40 W | 1171 | 007-9054 ☐☐☐☐ |
| 51 W | 1463 | 007-9055 ☐☐☐☐ |


CABLE SUSPENSION

| TYPE | L (mm) | ORDER CODE |
|----------------------|--------|-------------|
| inset 100 wallwasher | 1500 | 005-2132310 |

installation channel is required for mounting

Technical data

| SYSTEM POWER | COLOUR TEMPERATURE | DELIVERED LUMENS | EFFICACY |
|--------------|--------------------|------------------|----------|
| 35 W/m | 3000 K | 2820 lm/m | 82 lm/W |
| | 4000 K | 2990 lm/m | 87 lm/W |

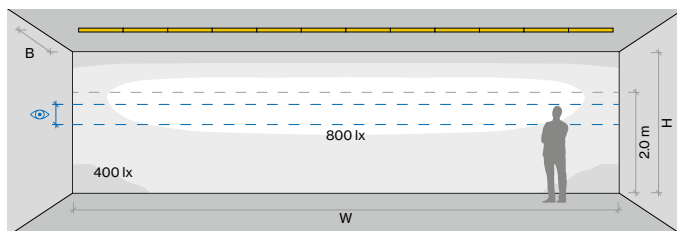

INSET 100 wallwasher, 30 W, 3000 K


ROOM VALUES

| | |
|-----------------------------|------------------------|
| Wall dimensions | H = 2.8 m W = 10.8 m |
| Distance to wall | B = 1.3 m |
| Distance between luminaires | continuous |
| Reflection factor | 0.7 0.5 0.2 |
| Maintenance factor | 0.8 |

CALCULATION SURFACE

| | |
|--------------------|-----------------|
| Surface dimensions | 10.8 × 2.8 m |
| Surface height | 0 – 2.8 m |
| Eye level | 1.35 m – 1.75 m |

Light distribution






asymmetric

LUMINOUS FLUX value calculated for CRI ≥ 80, colour white, reflector chrome

Order options

| NUMBER OF PIECES |  |
|------------------|---|
| 2 pieces | 2 |
| 3 pieces | 3 |





FRAME 40/MINO 40

HOUSING FOR CONCRETE INSTALLATION

| TYPE | L (mm) | ORDER CODE |
|---------------|--------|------------|
| FRAME 40 trim | 3010 | 005-41356 |
| MINO 40 | 3010 | 005-41356 |

MOUNTING SET

| TYPE | ORDER CODE |
|---------------|--|
| FRAME 40 trim | 035-0602  |
| MINO 40 | 034-0602  |

up to 900 mm: 2 pieces / up to 1500 mm: 3 pieces / up to 3000 mm: 2 x 2 pieces

END CAPS


| TYPE | ORDER CODE |
|-----------------|------------|
| end caps (pair) | 005-41236 |

LINEAR CONNECTOR

| TYPE | ORDER CODE |
|------------------------------|--------------|
| linear connector (1 piece) | 005-41166 |
| linear connector (10 pieces) | 005-41166.10 |


CORNER CONNECTOR 90°


| TYPE | L (mm) | ORDER CODE |
|---------------|--------|------------|
| FRAME 40 trim | 140 | 035-06016 |
| MINO 40 | 140 | 035-06016 |

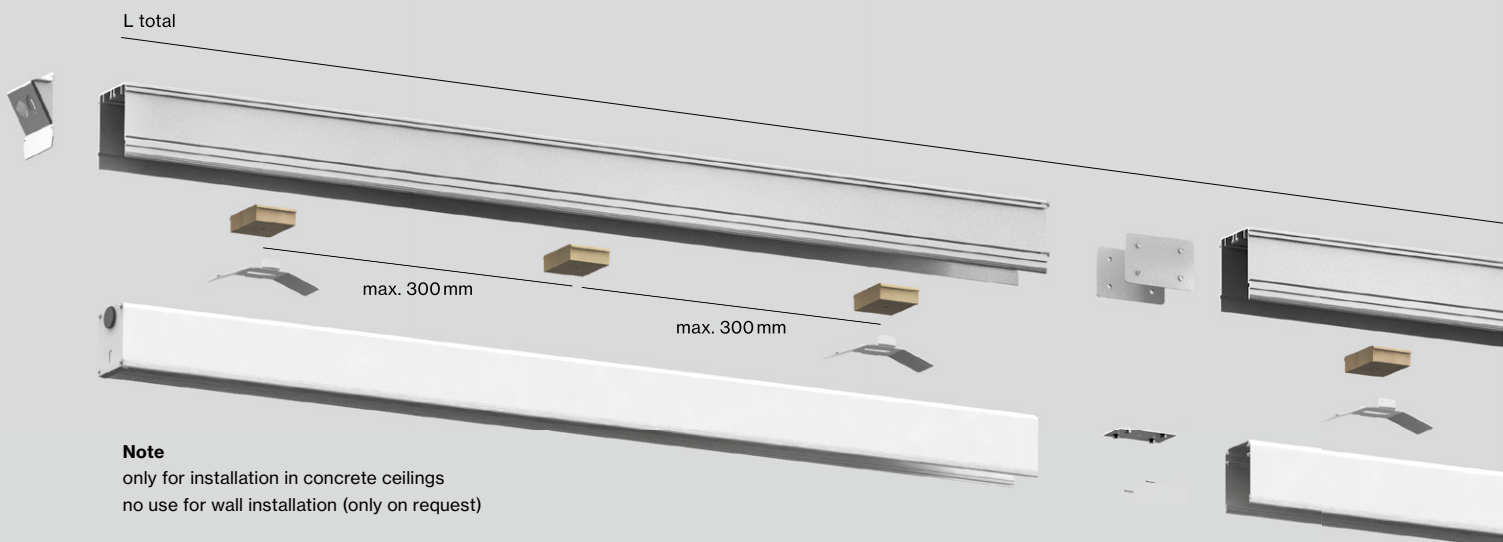

Note
only for installation in concrete ceilings
no use for wall installation (only on request)




CONCRETE installation housing

 Concrete casting made of aluminium profile, designed for continuous lighting systems

 Telaio da incasso per calcestruzzo in profilo di alluminio, per sistemi di file continue

Order options

| NUMBER OF PIECES | |
|------------------|---|
| 2 pieces | 2 |
| 3 pieces | 3 |



FRAME 60/MINIMAL 60/MINO 60/BASO 60

HOUSING FOR CONCRETE INSTALLATION

| TYPE | L (mm) | ORDER CODE |
|----------------------|--------|------------|
| FRAME 60 trim | 3000 | 005-41346 |
| BASO 60 IP54 trim | 3000 | 005-41346 |
| MINIMAL 60 trimless | 3000 | 005-41346 |
| MINO 60 ceiling | 3000 | 005-41446 |
| BASO 60 IP54 surface | 3000 | 005-41446 |

MOUNTING SET

| TYPE | ORDER CODE |
|----------------------|------------|
| FRAME 60 trim | 035-0600 |
| BASO 60 IP54 trim | 035-0600 |
| MINIMAL 60 trimless | 036-0400 |
| MINO 60 ceiling | 034-0400 |
| BASO 60 IP54 surface | 034-0400 |

up to 900mm: 2 pieces / up to 1500mm: 3 pieces / up to 3000mm: 2 x 2 pieces

END CAPS

| TYPE | ORDER CODE |
|-----------------|------------|
| end caps (pair) | 005-41246 |

LINEAR CONNECTOR

| TYPE | ORDER CODE |
|------------------------------|--------------|
| linear connector (1 piece) | 005-41166 |
| linear connector (10 pieces) | 005-41166.10 |

CORNER CONNECTOR 90°


| TYPE | L (mm) | ORDER CODE |
|----------------------|--------|------------|
| FRAME 60 trim | 142 | 035-04016 |
| BASO 60 IP54 trim | 142 | 035-04016 |
| MINIMAL 60 trimless | 146 | 036-04016 |
| MINO 60 ceiling | 157 | 034-04016 |
| BASO 60 IP54 surface | 157 | 034-04016 |

FRAME 100/MINIMAL 100/MINO 100

HOUSING FOR CONCRETE INSTALLATION




| TYPE | L (mm) | ORDER CODE |
|----------------------|--------|------------|
| FRAME 100 trim | 3000 | 005-41366 |
| MINIMAL 100 trimless | 3000 | 005-41366 |
| MINO 100 ceiling | 3000 | 005-41466 |



MOUNTING SET

| TYPE | ORDER CODE |
|----------------------|------------|
| FRAME 100 trim | 035-0600 |
| MINIMAL 100 trimless | 036-0500 |
| MINO 100 ceiling | 034-0400 |

up to 900mm: 2 pieces / up to 1500mm: 3 pieces / up to 3000mm: 2x2 pieces




END CAPS

| TYPE | ORDER CODE |
|-----------------|------------|
| end caps (pair) | 005-41266 |



LINEAR CONNECTOR

| TYPE | ORDER CODE |
|------------------------------|--------------|
| linear connector (1 piece) | 005-41166 |
| linear connector (10 pieces) | 005-41166.10 |



CORNER CONNECTOR 90°

| TYPE | L (mm) | ORDER CODE |
|----------------------|--------|------------|
| FRAME 100 trim | 202 | 035-05016 |
| MINIMAL 100 trimless | 207 | 036-05016 |
| MINO 100 ceiling | 207 | 034-05016 |