



SONIC

suspended

^{EN} Conical light housing in die-cast aluminium; powder coated; pendant fitting with cable suspension; with integrated tool-less suspension height adjustment; incl. transparent feed or with height adjustable rod suspension (chrome), feed in rod; direct/indirect light distribution; indirect component – special PCBs for increased luminous flux (max. ceiling illumination); completely homogeneous illumination; energy-eff. LEDs – very good colour rendering; canopy for through wiring; acoustic elements made of high-quality, self-supporting, recycled PET felt (high acoustic performance by doubling the material) or as an acoustically effective lampshade (large selection of colours) with sound absorbing properties

^{IT} Corpo illuminante conico in alluminio pressofuso; verniciatura a polvere; sospeso con cavo a sospensione; altezza regolabile sull'apparecchio, senza utensili; incl. cavo di alimentazione trasparente o con asta di sospensione accorciabile (cromata), cavo alimentazione nell'asta di sospensione; emissione diretta/indiretta; comp. luce indir. – PCB speciali per mass. flusso lum. (illum. massima del soffitto); illuminazione assolutamente omogenea; LED a risp. energ. – ottima resa cromatica; rosone per cablaggio passante; Elementi acustici in feltro prodotto con PET riciclato di alta qualità e autoportante (alte prestazioni acustiche grazie al materiale doppiato) o come paralume acusticamente efficace (ampia scelta di colori) con proprietà fonoassorbenti

Quickinfo


3000 K, 4000 K
CRI ≥ 80, 3 SDCM
up to 152lm/W
L90 @ 50000h
DALI-2
brightness & presence sensor
microprismatic (UGR ≤ 19)

acoustic elements

♻️ from recycled material

🔥 available as B-s1, d0

Types




Luminaire colours




Acoustic colours



Light distribution



DiiA® standards
251, 252, 253



microprismatic
(UGR ≤ 19)



sensor version
available



acoustic
absorber



direct/indirect
illumination

Order options

SUSPENSION	
cable 1500 mm	2
rod 1000 mm	4

COLOUR TEMPERATURE	
3000K	5
4000K	6

CONTROL	
DALI-2	3
ESSENTIAL sensor (brightness & presence)	7

LUMINAIRE COLOUR	
○ pure white RAL 9010	7
● black grey RAL 7021	6
special colours* p.992	X



*canopy always in white

ACOUSTIC COLOUR	
○ white	W
● marble grey	D
● felt grey	G
● black	L
special colours p.992	X

LIGHT OPTIC COVER	
microprismatic (UGR ≤ 19)	

Options on request

COLOUR RENDERING INDEX	
CRI ≥ 90	



*rod version


SONIC suspended



DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
69W	3000K	↓ 5000/↑ 4940lm	0 5 9 - 7 2 1 P
	4000K	↓ 5290/↑ 5230lm	

Technical data



SONIC suspended, 69W, 4000K direct/indirect with absorber

ROOM VALUES	
Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8
Mounting height	2.25 m

CALCULATION SURFACE	
Surface dimensions	Floor
Surface height	0.5 m

GLARE EVALUATION	
Table Classification	X=4H Y=8H S=0.25H
UGR transversal	≤ 19
UGR axial	≤ 19




LIGHT OPTIC COVER

microprismatic (UGR ≤ 19)

Options on request

COLOUR RENDERING INDEX

CRI ≥ 90




Acoustic elements

SONIC ABSORBER ring

COLOUR	Ø-H (mm)	ORDER CODE
white	1050-50	0 5 9 - 7 7 1 1 2 1 W
white	1280-50	0 5 9 - 7 7 1 1 1 1 W
marble grey	1050-50	0 5 9 - 7 7 1 1 2 1 D
marble grey	1280-50	0 5 9 - 7 7 1 1 1 1 D
black	1050-50	0 5 9 - 7 7 1 1 2 1 L
black	1280-50	0 5 9 - 7 7 1 1 1 1 L

only in combination with SONIC suspended or SONIC free standing




SONIC ABSORBER DISK suspended


COLOUR	Ø-H (mm)	ORDER CODE
white	1050-50	0 5 9 - 7 7 2 2 2 1 W
white	1280-50	0 5 9 - 7 7 2 2 1 1 W
marble grey	1050-50	0 5 9 - 7 7 2 2 2 1 D
marble grey	1280-50	0 5 9 - 7 7 2 2 1 1 D
black	1050-50	0 5 9 - 7 7 2 2 2 1 L
black	1280-50	0 5 9 - 7 7 2 2 1 1 L

cable suspension 1500 mm

Light distribution



microprismatic
direct/indirect




SONIC SOUNDCAP

TYPE	Ø-H (mm)	ORDER CODE
soundcap	527-300	0 5 9 - 7 7 3 1 1 1

only in combination with SONIC suspended or SONIC free standing;
bracket colour white; other bracket colours on request;

LUMINOUS FLUX value calculated for
CRI ≥ 80, colour white, cover microprismatic

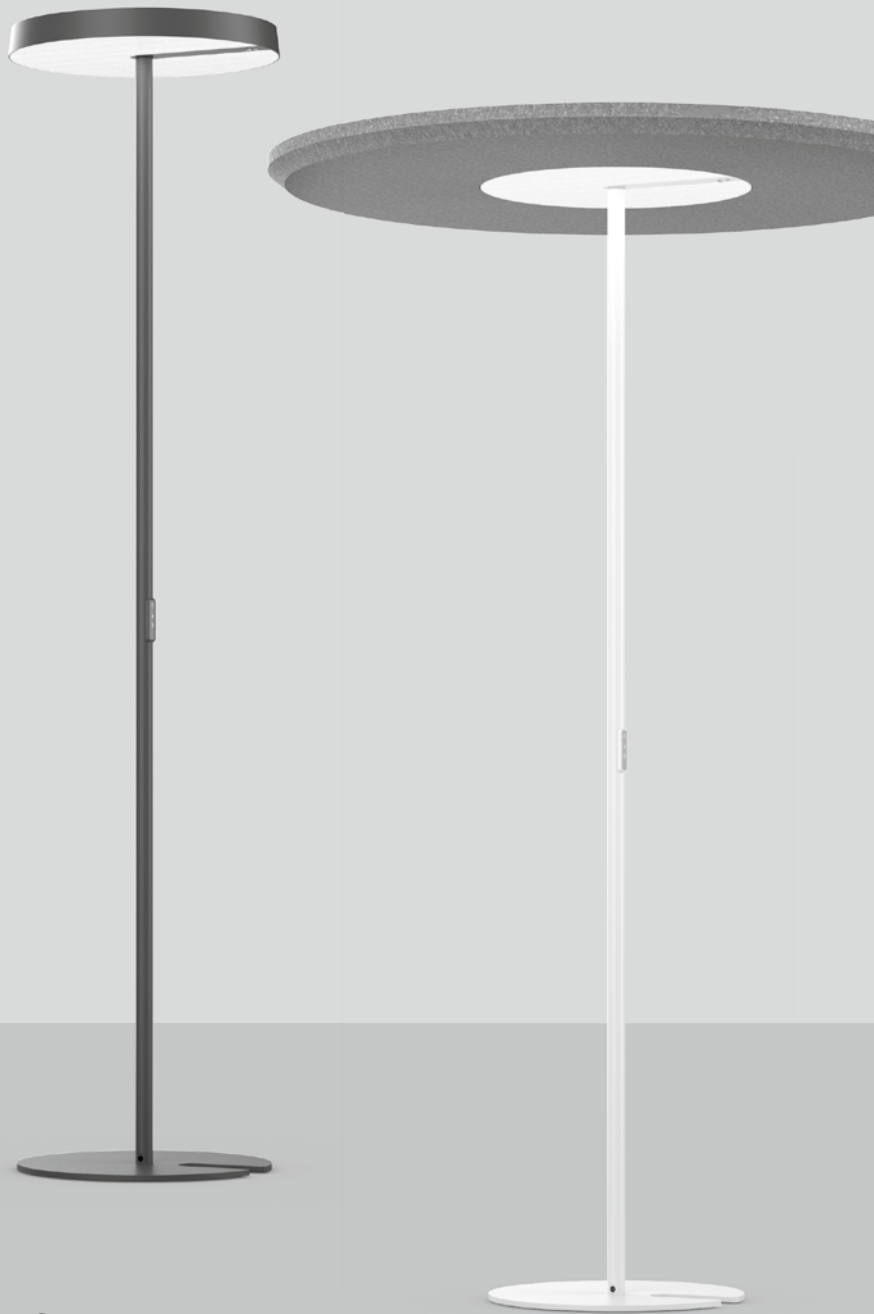

SONIC

free standing

EN Free standing luminaire with conical luminaire head in die-cast aluminium; powder coated; round aluminium downpipe arranged centralised or decentralised; round pedestal with recess for table base; direct/indirect light distribution; indirect component – special PCBs for increased luminous flux (max. ceiling illumination); optional: indirect component with special, inclined PCBs for asymmetric radiation characteristic; completely homogeneous illumination; energy-eff. LEDs – very good colour rendering; incl. connection cable (3m) with safety plug; acoustic elements made of high-quality, self-supporting, recycled PET felt (high acoustic performance by doubling the material) or as an acoustically effective lampshade (large selection of colours) with sound absorbing properties


IT Piantana con testata conica in alluminio pressofuso; verniciatura a polvere; stelo rotondo in alluminio a scelta con disposizione centrale o laterale; piedistallo rotondo con apertura per piede tavolo; emissione diretta/indiretta; comp. luce indir. – PCB speciali per mass. flusso lum. (illum. massima del soffitto); opzionale: componente di luce indiretta con piastre proprie inclinate per un'emissione asimmetrica; illuminazione assolutamente omogenea; LED a risp. energ. – ottima resa cromatica; incl. cavo di collegamento (3m) con spina Schuko; elementi acustici in feltro prodotto con PET riciclato di alta qualità e autoportante (alte prestazioni acustiche grazie al materiale doppiato) o come paralume acusticamente efficace (ampia scelta di colori) con proprietà fonoassorbenti

Quickinfo

3000 K, 4000 K
 CRI ≥ 80, 3 SDCM
 UGR ≤ 19 / 65° ≤ 3000 cd/m²
 up to 152 lm/W
 L90 @ 50 000h
 non DIM, touch DIM on pole
 brightness & presence sensor
 microprismatic (UGR ≤ 19)

acoustic elements
 ♻️ from recycled material
 🔥 available as B-s1, d0

Types

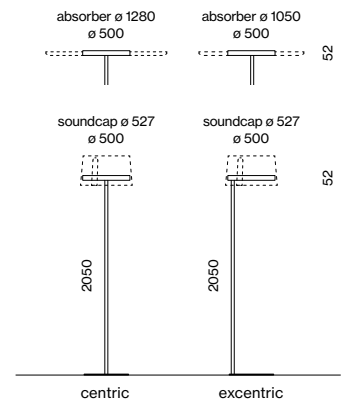

Luminaire colours



Acoustic colours



Light distribution



DiiA® standards
 251, 252, 253



(UGR ≤ 19)



available



illumination

Order options

COLOUR TEMPERATURE	••
3000K	5
4000K	6

CONTROL	◆
non DIM switch	1
touch DIM on pole	5
ESSENTIAL sensor (brightness & presence)	7

LUMINAIRE COLOUR	■
○ pure white RAL 9010	7
● black grey RAL 7021	6
●●● special colours p. 992	X

ACOUSTIC COLOUR	■
○ white	W
● marble grey	D
● felt grey	G
● black	L
●●● special colours p. 992	X


LIGHT OPTIC COVER	
microprismatic (UGR ≤ 19)	

Options on request


COLOUR RENDERING INDEX	
CRI ≥ 90	

CONTROL	
cluster network DIM	
dynamic daylight control (BPI)	
Zigbee 3.0	

Light distributions





microprismatic direct/indirect



microprismatic direct/indirect asym. power

LUMINOUS FLUX value calculated for CRI ≥ 80, colour white, cover microprismatic



SONIC centric pole free standing



DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
69 W	3000 K	↓ 5000 / ↑ 4940 lm	0 5 9 - 7 9 2 1 ◆◆◆ P
	4000 K	↓ 5290 / ↑ 5230 lm	

DIRECT / INDIRECT ASYMMETRIC POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
98 W	3000 K	↓ 2580 / ↑ 9300 lm	0 5 9 - 7 9 4 1 ◆◆◆ P
	4000 K	↓ 2730 / ↑ 9960 lm	

SONIC excentric pole free standing




DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
69 W	3000 K	↓ 5000 / ↑ 4940 lm	0 5 9 - 7 9 2 2 ◆◆◆ P
	4000 K	↓ 5290 / ↑ 5230 lm	

DIRECT / INDIRECT ASYMMETRIC POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
98 W	3000 K	↓ 2580 / ↑ 9300 lm	0 5 9 - 7 9 4 2 ◆◆◆ P
	4000 K	↓ 2730 / ↑ 9960 lm	

Technical data



SONIC excentric pole free standing
69 W, 4000 K, direct/indirect

ROOM VALUES	
Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8

CALCULATION SURFACE	
Surface dimensions	1.6 × 0.8
Surface height	0.75
Average illuminance (E _m)	> 500 lx
Uniformity (U ₀)	> 0.6

GLARE EVALUATION	
Table Classification X=4H Y=8H S=0.25H	
UGR transversal	≤ 19
UGR axial	≤ 19



Acoustic elements

SONIC ABSORBER ring

COLOUR	Ø-H (mm)	ORDER CODE
white	1050-50	0 5 9 - 7 7 1 1 2 1 W
white	1280-50	0 5 9 - 7 7 1 1 1 1 W
marble grey	1050-50	0 5 9 - 7 7 1 1 2 1 D
marble grey	1280-50	0 5 9 - 7 7 1 1 1 1 D
black	1050-50	0 5 9 - 7 7 1 1 2 1 L
black	1280-50	0 5 9 - 7 7 1 1 1 1 L

only in combination with SONIC suspended or SONIC free standing

SONIC SOUNDCAP

TYPE	Ø-H (mm)	ORDER CODE
soundcap	527-300	0 5 9 - 7 7 3 1 1 1 ■

only in combination with SONIC suspended or SONIC free standing;
bracket colour white; other bracket colours on request

