


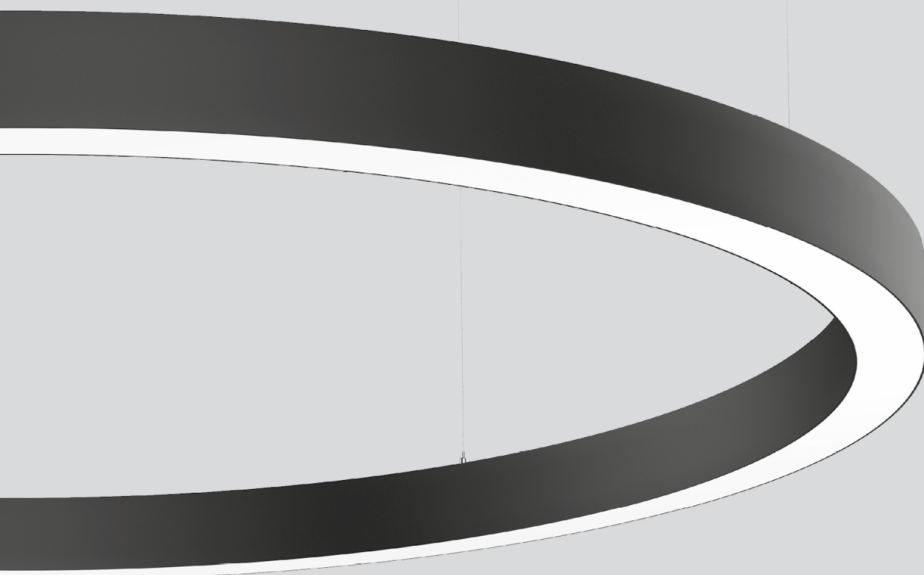

MINO 60 S CIRCLE

suspended


^{EN} Ring shaped luminaire housing from rolled aluminium extruded profile, seamlessly welded; flat design luminaire housing; surface powder coated; pendant fitting with cable suspension, alternatively with canopy central; height adjustment without tools; incl. feed (black or white); converter included in canopy; HPO (High Performance Opal) cover for uniform illumination; optional with direct/indirect illumination characteristic for additional emphasis of the ceiling and more visual comfort; energy-efficient LEDs with very good colour rendering

Corpo illuminante circolare in profilo di alluminio estruso rullato e senza punti di saldatura; forma piatta; verniciatura a polvere; sospeso con cavo a sospensione, a scelta con rosone centrale; regolazione altezza senza utensili; incl. cavo di alimentazione (nero o bianco); convertitore integrato nel rosone; diffusore HPO (High Performance Opal) per un'illuminazione omogenea; in opzione con emissione diretta/indiretta per ulteriore accentuazione del soffitto e migliore comfort visivo; LED ad efficienza energetica con elevata resa cromatica

Quickinfo

3000 K, 4000 K
CRI $\geq$ 80 / 3 SDCM
fino a ↓ 10,300 lm / ↑ 5,800 lm
fino a 137 lm/W
L90 / 50000 h
DALI-2
High Performance Opal
IP20

Types



Colore




Distribuzione della luce



DiiA® standards
251, 252, 253



direct / indirect
illumination



MINO 60 S CIRCLE 1000 suspended




OPAL | DIRECT CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
59.0 W	3000 K	6420 lm	109 lm/W	0 3 4 - 7 1 2 5 3 H
	4000 K	7300 lm	124 lm/W	0 3 4 - 7 1 2 6 3 H

OPAL | DIRECT / INDIRECT CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
79.0 W	3000 K	↓6420/↑3120 lm	121 lm/W	0 3 4 - 7 1 3 5 3 H
	4000 K	↓7300/↑3550 lm	137 lm/W	0 3 4 - 7 1 3 6 3 H



MINO 60 S CIRCLE 1500 suspended



OPAL | DIRECT CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
83.0 W	3000 K	9010 lm	109 lm/W	0 3 4 - 7 1 0 5 3 H
	4000 K	10300 lm	124 lm/W	0 3 4 - 7 1 0 6 3 H

OPAL | DIRECT / INDIRECT CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
119.0 W	3000 K	↓9010/↑5100 lm	119 lm/W	0 3 4 - 7 1 1 5 3 H
	4000 K	↓10300/↑5800 lm	135 lm/W	0 3 4 - 7 1 1 6 3 H

Order options

MOUNTING		COLOUR	
cable 1500 mm	2	pure white RAL 9010	7
cable 1500 mm / canopy central	4	jet black RAL 9005	8
		white aluminium RAL 9006	G
		special colours	X

Dentsu Aegis Network, Zurich

Svizzera

Architetto

Büronauten AG

Lighting Design

Caduff Socker

Fotografo

Z. Gataric Fotografie



Prodotti utilizzati



MINO 60 CIRCLE
suspended



TULA suspended



**TULA MOVE IT 25 /
25 S / 45**



MINO 60 S CIRCLE
suspended



