

design by

13&9



SOUNDCATCHER

acoustic suspended

EN Acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties; in different moldings; constructed of two layers; choice of square, round or octagonal design; suitable for single or group installation; high quality visual and tactile surface; acoustically effective cavities; large sound absorbing surface; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; pendant fitting with MITA circle 240 acoustic suspended (LUMINAIRE or BLIND SUSPENSION); optionally with sensor (ESSENTIAL or SENSE)

IT Elemento acustico in feltro prodotto con PET riciclato di alta qualità, autoportante e con proprietà fonoassorbenti; in diverse forme; realizzato in due strati; forma a scelta tra quadrata, rotonda o rettangolare; adatti per montaggio singolo e a gruppi; finitura con caratteristiche estetiche e tattili di alta qualità; cavità efficaci a livello acustico; ampia superficie fonoassorbente; assorbimento del suono diretto e del suono riflesso dal soffitto; con elevata performance acustica; sospesa con MITA circle 240 acoustic suspended (LUMINAIRE o BLIND SUSPENSION); a scelta con sensore (ESSENTIAL o SENSE)

Quickinfo

PET felt

from recycled material

up to absorption class A

suitable for workstations

flame retardant version available

3000 K, 4000 K

CRI ≥ 80, 3 SDCM

UGR ≤ 19 / 65° ≤ 1500 cd/m²


up to 159 lm/W

L95 @ 50 000 h


DALI-2, ESSENTIAL, SENSE sensor reflector (UGR ≤ 19)

Types

SOUNDCATCHER sharp



SOUNDCATCHER soft



Acoustic colours




Luminaire colours



Light distribution



direct


acoustic
volumegroup
mountingfour types
in one sizeDIN EN 12464-1
UGR ≤ 19

Order options


ACOUSTIC COLOUR

● marble grey	D
● felt grey	G
● anthracite	B

other colours on request





SOUND-CATCHER sharp



TYPE	L-W-H (mm)	ORDER CODE
square 1000	1000-1000-150	091-311120
octo 1000	1000-1000-150	091-311320

SOUND-CATCHER soft




TYPE	L-W-H (mm)	ORDER CODE
square 1000	1000-1000-154	091-312120
round 1000	1000-1000-154	091-312220

Acoustic data

Equivalent sound absorption area (A_{eq})

TYPE	125	250	500	1000	2000	4000 Hz
sharp square	0.53	0.76	1.26	1.24	1.65	1.88
sharp octo	0.43	0.63	1.04	1.01	1.35	1.55
soft square	0.56	0.82	1.35	1.32	1.76	2.01
soft round	0.46	0.66	1.09	1.07	1.42	1.62

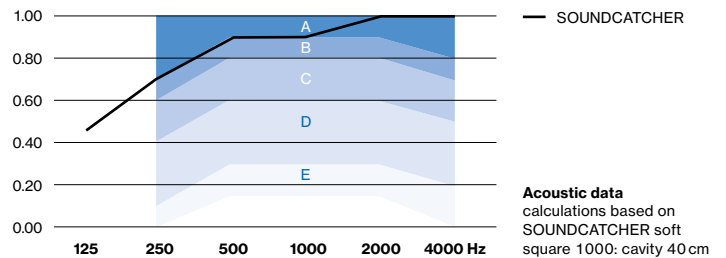Sound absorption coefficient (α_p)

Order options

COLOUR TEMPERATURE

3000K	5
4000K	6

CONTROL

DALI-2	3
DALI-2 ESSENTIAL sensor (brightness & presence)*	B
DALI-2 SENSE sensor (brightness, presence, temperature, sound pressure, humidity, CO ₂)*	P

*DALI-2 application controller needed

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8

REFLECTOR COLOUR


☞ chrome	R
● dark chrome	B

LUMINOUS FLUX value calculated for colour white, reflector chrome

MITA circle 240 acoustic suspended



luminaire blind suspension



LUMINAIRE

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
13.8 W	3000K	1950 lm	091-3180
	4000K	2160 lm	
16.3 W	3000K	2270 lm	091-3181
	4000K	2590 lm	

BLIND SUSPENSION

TYPE	ORDER CODE
240 round	091-319000

SYSTEM CONNECTOR

TYPE	ORDER CODE
set of two connectors	091-319100