



ENVIVA

suspended


^{EN} Luminaire housing from extruded aluminium profile, angular design; extremely slim design (only 45 × 15 mm); no visible screws; surface raw or powder coated; pendant fitting with cable suspension; can be adjusted to any height; incl. feeder cable; linear light inset made of plastic; fitted with single LED light points; good glare reduction due to recessed light point plane; despite this increased efficiency through special lens technology; inserted lenses with wide flood radiation characteristic; or high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with symmetrical light distribution; direct/indirect light distribution; canopy for through wiring (separately available); converter included in canopy; optionally with sensor

▮ Corpo illuminante in profilo di alluminio estruso, modello squadrato; forma estremamente sottile (solo 45 × 15 mm); nessuna vite visibile; finitura grezza o verniciata a polvere; sospeso con cavo a sospensione; regolabile in altezza in continuo; incl. cavo di alimentazione; inserto luminoso lineare in plastica; dotato di singoli punti luce a LED; ottima schermatura con superficie di emissione arretrata; comunque maggiore efficienza con la speciale tecnologia delle lenti; lenti con emissione wide flood; o riflettore di alta qualità con superficie a microfacette e vaporizzata in alluminio; caratteristica di emissione precisa con distribuzione simmetrica della luce; emissione diretta/indiretta; rosone per cablaggio passante (da ordinare separatamente); convertitore integrato nel rosone; a scelta con sensore

Quickinfo

3000 K, 4000 K
 CRI ≥ 80, CRI ≥ 90, 3 SDCM
 up to 187 lm/W
 $UGR \leq 16$ / $65^\circ \leq 1500 \text{ cd/m}^2$
 L90 @ 50 000 h
 DALI-2, DALI-2 ESSENTIAL sensor
 louver, spotline

Types

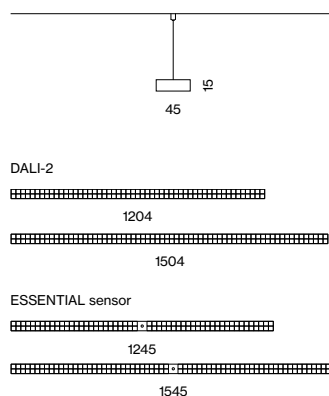


Colours




Light distribution



up to 187 lm/W
 (high efficiency)



DIN EN 12464-1
 $UGR \leq 19$



sensor
 integrated

Order options

COLOUR TEMPERATURE

3000 K (CRI ≥ 80)	5
4000 K (CRI ≥ 80)	6
3000 K (CRI ≥ 90)	0
4000 K (CRI ≥ 90)	1

CONTROL

DALI-2	1
DALI-2 ESSENTIAL sensor (brightness & presence)*	B

*DALI-2 application controller needed

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● aluminium raw/white*	0
● aluminium raw/black**	1

*feeder cable white/cable susp. chrome

**feeder cable black/cable susp. black

LIGHT OPTIC

louver (super wide flood 74°)	
spotline (wide flood 67°)	

REFLECTOR COLOUR


☞ chrome	4
● black	8

SPOTLINE COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● gold	9

CANOPY COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8



ENVIVA suspended



LOUVER direct/indirect

INSET POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
36 W 850 mA	3000 K ↓ 3180/↑ 3080lm	1204*	067-0214:::X	
	4000 K ↓ 3620/↑ 3500lm			
36 W 850 mA	3000 K ↓ 3230/↑ 3100lm	1504*	067-0215:::X	
	4000 K ↓ 3680/↑ 3520lm			

*sensor version +41mm; order canopy separately

SPOTLINE direct/indirect

INSET POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
38 W 900 mA	3000 K ↓ 3340/↑ 3280lm	1204*	067-1214:::W	
	4000 K ↓ 3800/↑ 3730lm			
38 W 900 mA	3000 K ↓ 3340/↑ 3250lm	1504*	067-1215:::W	
	4000 K ↓ 3810/↑ 3700lm			

*sensor version +41mm; order canopy separately

Electrical accessories

CANOPY CEILING 220-240 V AC, 50-60 Hz, PC II



TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
850 mA DALI-2	η 89 %	112-112-35	005-261103
900 mA DALI-2	η 89 %	112-112-35	005-261113

INSET POWER is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 80, reflector colour chrome and spotline colour traffic white