

UNICO Q1 / Q4 basic

recessed

^{EN} Square recessed multi-downlight made of die-cast aluminium; equipped with one (Q1) / four (Q4) individually selectable or pre-specified, customised light element(s); or with a sensor; installation without tools in mounting set with ball catch system; easy electrical installation by means of reverse polarity protected plug-in connections; suitable for ceiling thickness of 2-25mm; surface powder coated; installation possible in different housings; high-quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering; clank-free

Downlight multiplo quadrato da incasso in alluminio pressofuso; dotata di una lente (Q1) / quattro lenti (Q4) selezionabili individualmente o definite per applicazioni specifiche; oppure con un sensore (Q1); set di fissaggio con cuscinetto a sfera, senza bisogno di utensili; montaggio elettrico semplice grazie a collegamenti a spina a prova di polarizzazione inversa; per soffitti di spessore 2-25 mm; verniciatura a polvere; incasso possibile in vari telai; riflettore di alta qualità con superficie a microfacette e vaporizzata in alluminio; emissione precisa con diversi fasci luminosi simmetrici; o con distribuzione asimmetrica della luce; LED high power a risparmio energetico con ottima resa cromatica; senza distorsione

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI \geq 90 / 3 SDCM (initial MacAdam)
 UGR \leq 10, UGR \leq 16, UGR \leq 19
 fino a 135 lm/W
 L85 / 50000 h, L90 / 50000 h
 DALI-2, non DIM
 front IP20

Types



Colore



Set di montaggio



Distribuzione della luce



DiiA® standards
251, 252, 253




sensor version
available



one luminaire
multiple scenes




plug / socket
connector




black & gold
reflector
(optional)



tunable white
2700 – 5000 K
(optional)



UNICO Q1 basic high efficient



FLOOD ROUND 46°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 4.1 W | 2700 K | 437 lm | 107 lm/W | 0 9 0 - 7 Q 1 9 ⇄ C 0 ■ 3 1 |
| | 3000 K | 455 lm | 111 lm/W | 0 9 0 - 7 Q 1 0 ⇄ C 0 ■ 3 1 |
| | 3500 K | 455 lm | 111 lm/W | 0 9 0 - 7 Q 1 2 ⇄ C 0 ■ 3 1 |
| | 4000 K | 473 lm | 115 lm/W | 0 9 0 - 7 Q 1 1 ⇄ C 0 ■ 3 1 |



WIDE FLOOD ROUND 71°, CRI ≥ 90


| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 4.1 W | 2700 K | 449 lm | 110 lm/W | 0 9 0 - 7 Q 1 9 ⇄ D 0 ■ 3 1 |
| | 3000 K | 468 lm | 114 lm/W | 0 9 0 - 7 Q 1 0 ⇄ D 0 ■ 3 1 |
| | 3500 K | 468 lm | 114 lm/W | 0 9 0 - 7 Q 1 2 ⇄ D 0 ■ 3 1 |
| | 4000 K | 487 lm | 119 lm/W | 0 9 0 - 7 Q 1 1 ⇄ D 0 ■ 3 1 |

FLOOD SQUARE 54°, CRI ≥ 90


| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 4.1 W | 2700 K | 459 lm | 112 lm/W | 0 9 0 - 7 Q 1 9 ⇄ F 0 ■ 3 1 |
| | 3000 K | 478 lm | 117 lm/W | 0 9 0 - 7 Q 1 0 ⇄ F 0 ■ 3 1 |
| | 3500 K | 478 lm | 117 lm/W | 0 9 0 - 7 Q 1 2 ⇄ F 0 ■ 3 1 |
| | 4000 K | 497 lm | 121 lm/W | 0 9 0 - 7 Q 1 1 ⇄ F 0 ■ 3 1 |

WIDE FLOOD SQUARE 71°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 4.1 W | 2700 K | 471 lm | 115 lm/W | 0 9 0 - 7 Q 1 9 ⇄ G 0 ■ 3 1 |
| | 3000 K | 491 lm | 120 lm/W | 0 9 0 - 7 Q 1 0 ⇄ G 0 ■ 3 1 |
| | 3500 K | 491 lm | 120 lm/W | 0 9 0 - 7 Q 1 2 ⇄ G 0 ■ 3 1 |
| | 4000 K | 510 lm | 124 lm/W | 0 9 0 - 7 Q 1 1 ⇄ G 0 ■ 3 1 |



UNICO Q1 basic



SPOT ROUND 15°, chrome reflector, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 6.0 W | 2700 K | 265 lm | 44 lm/W | 0 9 0 - 7 Q 1 4 ⇄ K 0 0 2 1 |
| | 3000 K | 287 lm | 48 lm/W | 0 9 0 - 7 Q 1 5 ⇄ K 0 0 2 1 |
| | 4000 K | 299 lm | 50 lm/W | 0 9 0 - 7 Q 1 6 ⇄ K 0 0 2 1 |



Order options

| CONTROL | | ⇄ COLOUR | |
|---------|---|------------------|---|
| non DIM | 1 | chrome reflector | 0 |
| DALI-2 | 3 | black reflector | B |

NARROW MEDIUM ROUND 22°, chrome reflector, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 6.0 W | 2700 K | 269 lm | 45 lm/W | 0 9 0 - 7 Q 1 4 <input checked="" type="checkbox"/> N 0 0 2 1 |
| | 3000 K | 292 lm | 49 lm/W | 0 9 0 - 7 Q 1 5 <input checked="" type="checkbox"/> N 0 0 2 1 |
| | 4000 K | 303 lm | 51 lm/W | 0 9 0 - 7 Q 1 6 <input checked="" type="checkbox"/> N 0 0 2 1 |

MEDIUM ROUND 33°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 6.0 W | 2700 K | 359 lm | 60 lm/W | 0 9 0 - 7 Q 1 4 <input checked="" type="checkbox"/> B 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 390 lm | 65 lm/W | 0 9 0 - 7 Q 1 5 <input checked="" type="checkbox"/> B 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 406 lm | 68 lm/W | 0 9 0 - 7 Q 1 6 <input checked="" type="checkbox"/> B 0 <input checked="" type="checkbox"/> 2 1 |

FLOOD ROUND 49°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 6.0 W | 2700 K | 413 lm | 69 lm/W | 0 9 0 - 7 Q 1 4 <input checked="" type="checkbox"/> C 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 449 lm | 75 lm/W | 0 9 0 - 7 Q 1 5 <input checked="" type="checkbox"/> C 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 466 lm | 78 lm/W | 0 9 0 - 7 Q 1 6 <input checked="" type="checkbox"/> C 0 <input checked="" type="checkbox"/> 2 1 |

WIDE FLOOD ROUND 72°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 6.0 W | 2700 K | 409 lm | 68 lm/W | 0 9 0 - 7 Q 1 4 <input checked="" type="checkbox"/> D 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 444 lm | 74 lm/W | 0 9 0 - 7 Q 1 5 <input checked="" type="checkbox"/> D 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 462 lm | 77 lm/W | 0 9 0 - 7 Q 1 6 <input checked="" type="checkbox"/> D 0 <input checked="" type="checkbox"/> 2 1 |

MEDIUM SQUARE 32°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 6.0 W | 2700 K | 353 lm | 59 lm/W | 0 9 0 - 7 Q 1 4 <input checked="" type="checkbox"/> E 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 384 lm | 64 lm/W | 0 9 0 - 7 Q 1 5 <input checked="" type="checkbox"/> E 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 399 lm | 67 lm/W | 0 9 0 - 7 Q 1 6 <input checked="" type="checkbox"/> E 0 <input checked="" type="checkbox"/> 2 1 |

FLOOD SQUARE 56°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 6.0 W | 2700 K | 420 lm | 70 lm/W | 0 9 0 - 7 Q 1 4 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 456 lm | 76 lm/W | 0 9 0 - 7 Q 1 5 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 474 lm | 79 lm/W | 0 9 0 - 7 Q 1 6 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 2 1 |

RECTANGULAR MEDIUM 34°x69°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 6.0 W | 2700 K | 365 lm | 61 lm/W | 0 9 0 - 7 Q 1 4 <input checked="" type="checkbox"/> R 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 396 lm | 66 lm/W | 0 9 0 - 7 Q 1 5 <input checked="" type="checkbox"/> R 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 411 lm | 69 lm/W | 0 9 0 - 7 Q 1 6 <input checked="" type="checkbox"/> R 0 <input checked="" type="checkbox"/> 2 1 |

Order options

| CONTROL | | COLOUR | |
|---------|---|------------------|---|
| non DIM | 1 | chrome reflector | 0 |
| DALI-2 | 3 | black reflector | B |

WIDE FLOOD SQUARE 71°, CRI ≥ 90



| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 6.0 W | 2700 K | 432 lm | 72 lm/W | 0 9 0 - 7 Q 1 4 <input checked="" type="checkbox"/> G 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 469 lm | 78 lm/W | 0 9 0 - 7 Q 1 5 <input checked="" type="checkbox"/> G 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 487 lm | 81 lm/W | 0 9 0 - 7 Q 1 6 <input checked="" type="checkbox"/> G 0 <input checked="" type="checkbox"/> 2 1 |

WALLWASHER chrome reflector, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 6.0 W | 2700 K | 365 lm | 61 lm/W | 0 9 0 - 7 Q 1 4 <input checked="" type="checkbox"/> A 0 0 2 1 |
| | 3000 K | 397 lm | 66 lm/W | 0 9 0 - 7 Q 1 5 <input checked="" type="checkbox"/> A 0 0 2 1 |
| | 4000 K | 412 lm | 69 lm/W | 0 9 0 - 7 Q 1 6 <input checked="" type="checkbox"/> A 0 0 2 1 |

WALLWASHER FLOOR CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 6.0 W | 2700 K | 381 lm | 64 lm/W | 0 9 0 - 7 Q 1 4 <input checked="" type="checkbox"/> W 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 414 lm | 69 lm/W | 0 9 0 - 7 Q 1 5 <input checked="" type="checkbox"/> W 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 430 lm | 72 lm/W | 0 9 0 - 7 Q 1 6 <input checked="" type="checkbox"/> W 0 <input checked="" type="checkbox"/> 2 1 |

**UNICO Q4 basic high efficient****FLOOD ROUND 46°, CRI ≥ 90**

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 11.6 W | 2700 K | 1340 lm | 116 lm/W | 0 9 0 - 7 Q 4 9 <input checked="" type="checkbox"/> C 0 <input checked="" type="checkbox"/> 3 1 |
| | 3000 K | 1400 lm | 121 lm/W | 0 9 0 - 7 Q 4 0 <input checked="" type="checkbox"/> C 0 <input checked="" type="checkbox"/> 3 1 |
| | 3500 K | 1400 lm | 121 lm/W | 0 9 0 - 7 Q 4 2 <input checked="" type="checkbox"/> C 0 <input checked="" type="checkbox"/> 3 1 |
| | 4000 K | 1450 lm | 125 lm/W | 0 9 0 - 7 Q 4 1 <input checked="" type="checkbox"/> C 0 <input checked="" type="checkbox"/> 3 1 |

**WIDE FLOOD ROUND 71°, CRI ≥ 90**

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 11.6 W | 2700 K | 1380 lm | 119 lm/W | 0 9 0 - 7 Q 4 9 <input checked="" type="checkbox"/> D 0 <input checked="" type="checkbox"/> 3 1 |
| | 3000 K | 1440 lm | 124 lm/W | 0 9 0 - 7 Q 4 0 <input checked="" type="checkbox"/> D 0 <input checked="" type="checkbox"/> 3 1 |
| | 3500 K | 1440 lm | 124 lm/W | 0 9 0 - 7 Q 4 2 <input checked="" type="checkbox"/> D 0 <input checked="" type="checkbox"/> 3 1 |
| | 4000 K | 1490 lm | 128 lm/W | 0 9 0 - 7 Q 4 1 <input checked="" type="checkbox"/> D 0 <input checked="" type="checkbox"/> 3 1 |

FLOOD SQUARE 54°, CRI ≥ 90


| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 11.6 W | 2700 K | 1410 lm | 122 lm/W | 0 9 0 - 7 Q 4 9 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 3 1 |
| | 3000 K | 1470 lm | 127 lm/W | 0 9 0 - 7 Q 4 0 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 3 1 |
| | 3500 K | 1470 lm | 127 lm/W | 0 9 0 - 7 Q 4 2 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 3 1 |
| | 4000 K | 1520 lm | 131 lm/W | 0 9 0 - 7 Q 4 1 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 3 1 |

Order options

| CONTROL | | COLOUR | |
|---------|---|------------------|---|
| non DIM | 1 | chrome reflector | 0 |
| DALI-2 | 3 | black reflector | B |

WIDE FLOOD SQUARE 71°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 11.6 W | 2700 K | 1450 lm | 125 lm/W | 0 9 0 - 7 Q 4 9 ◆ G 0 ■ 3 1 |
| | 3000 K | 1510 lm | 130 lm/W | 0 9 0 - 7 Q 4 0 ◆ G 0 ■ 3 1 |
| | 3500 K | 1510 lm | 130 lm/W | 0 9 0 - 7 Q 4 2 ◆ G 0 ■ 3 1 |
| | 4000 K | 1570 lm | 135 lm/W | 0 9 0 - 7 Q 4 1 ◆ G 0 ■ 3 1 |

**UNICO Q4 basic****SPOT ROUND 15°, chrome reflector, CRI ≥ 90**

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 13.1 W | 2700 K | 816 lm | 62 lm/W | 0 9 0 - 7 Q 4 4 ◆ K 0 0 2 1 |
| | 3000 K | 870 lm | 66 lm/W | 0 9 0 - 7 Q 4 5 ◆ K 0 0 2 1 |
| | 4000 K | 934 lm | 71 lm/W | 0 9 0 - 7 Q 4 6 ◆ K 0 0 2 1 |

**NARROW MEDIUM ROUND 22°, chrome reflector, CRI ≥ 90**

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 13.1 W | 2700 K | 830 lm | 63 lm/W | 0 9 0 - 7 Q 4 4 ◆ N 0 0 2 1 |
| | 3000 K | 884 lm | 67 lm/W | 0 9 0 - 7 Q 4 5 ◆ N 0 0 2 1 |
| | 4000 K | 949 lm | 72 lm/W | 0 9 0 - 7 Q 4 6 ◆ N 0 0 2 1 |

MEDIUM ROUND 33°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 13.1 W | 2700 K | 1110 lm | 85 lm/W | 0 9 0 - 7 Q 4 4 ◆ B 0 ■ 2 1 |
| | 3000 K | 1180 lm | 90 lm/W | 0 9 0 - 7 Q 4 5 ◆ B 0 ■ 2 1 |
| | 4000 K | 1270 lm | 97 lm/W | 0 9 0 - 7 Q 4 6 ◆ B 0 ■ 2 1 |

FLOOD ROUND 49°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 13.1 W | 2700 K | 1280 lm | 98 lm/W | 0 9 0 - 7 Q 4 4 ◆ C 0 ■ 2 1 |
| | 3000 K | 1360 lm | 104 lm/W | 0 9 0 - 7 Q 4 5 ◆ C 0 ■ 2 1 |
| | 4000 K | 1460 lm | 111 lm/W | 0 9 0 - 7 Q 4 6 ◆ C 0 ■ 2 1 |

WIDE FLOOD ROUND 72°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|-----------------------------|
| 13.1 W | 2700 K | 1260 lm | 96 lm/W | 0 9 0 - 7 Q 4 4 ◆ D 0 ■ 2 1 |
| | 3000 K | 1350 lm | 103 lm/W | 0 9 0 - 7 Q 4 5 ◆ D 0 ■ 2 1 |
| | 4000 K | 1440 lm | 110 lm/W | 0 9 0 - 7 Q 4 6 ◆ D 0 ■ 2 1 |

Order options

| CONTROL | | COLOUR | |
|---------|---|------------------|---|
| non DIM | 1 | chrome reflector | 0 |
| DALI-2 | 3 | black reflector | B |

MEDIUM SQUARE 32°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1090 lm | 83 lm/W | 0 9 0 - 7 Q 4 4 <input checked="" type="checkbox"/> E 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 1160 lm | 89 lm/W | 0 9 0 - 7 Q 4 5 <input checked="" type="checkbox"/> E 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 1250 lm | 95 lm/W | 0 9 0 - 7 Q 4 6 <input checked="" type="checkbox"/> E 0 <input checked="" type="checkbox"/> 2 1 |

FLOOD SQUARE 56°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1300 lm | 99 lm/W | 0 9 0 - 7 Q 4 4 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 1380 lm | 105 lm/W | 0 9 0 - 7 Q 4 5 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 1480 lm | 113 lm/W | 0 9 0 - 7 Q 4 6 <input checked="" type="checkbox"/> F 0 <input checked="" type="checkbox"/> 2 1 |

WIDE FLOOD SQUARE 71°, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1330 lm | 102 lm/W | 0 9 0 - 7 Q 4 4 <input checked="" type="checkbox"/> G 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 1420 lm | 108 lm/W | 0 9 0 - 7 Q 4 5 <input checked="" type="checkbox"/> G 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 1520 lm | 116 lm/W | 0 9 0 - 7 Q 4 6 <input checked="" type="checkbox"/> G 0 <input checked="" type="checkbox"/> 2 1 |

WALL + FLOOR chrome reflector, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1110 lm | 85 lm/W | 0 9 0 - 7 Q 4 4 <input checked="" type="checkbox"/> 9 0 0 2 1 |
| | 3000 K | 1180 lm | 90 lm/W | 0 9 0 - 7 Q 4 5 <input checked="" type="checkbox"/> 9 0 0 2 1 |
| | 4000 K | 1270 lm | 97 lm/W | 0 9 0 - 7 Q 4 6 <input checked="" type="checkbox"/> 9 0 0 2 1 |

CORNER + FLOOR chrome reflector, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1110 lm | 85 lm/W | 0 9 0 - 7 Q 4 4 <input checked="" type="checkbox"/> 9 0 0 2 2 |
| | 3000 K | 1180 lm | 90 lm/W | 0 9 0 - 7 Q 4 5 <input checked="" type="checkbox"/> 9 0 0 2 2 |
| | 4000 K | 1270 lm | 97 lm/W | 0 9 0 - 7 Q 4 6 <input checked="" type="checkbox"/> 9 0 0 2 2 |

WALLWASHER chrome reflector, CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1130 lm | 86 lm/W | 0 9 0 - 7 Q 4 4 <input checked="" type="checkbox"/> A 0 0 2 1 |
| | 3000 K | 1200 lm | 92 lm/W | 0 9 0 - 7 Q 4 5 <input checked="" type="checkbox"/> A 0 0 2 1 |
| | 4000 K | 1290 lm | 98 lm/W | 0 9 0 - 7 Q 4 6 <input checked="" type="checkbox"/> A 0 0 2 1 |

CORRIDOR chrome reflector, CRI ≥ 90

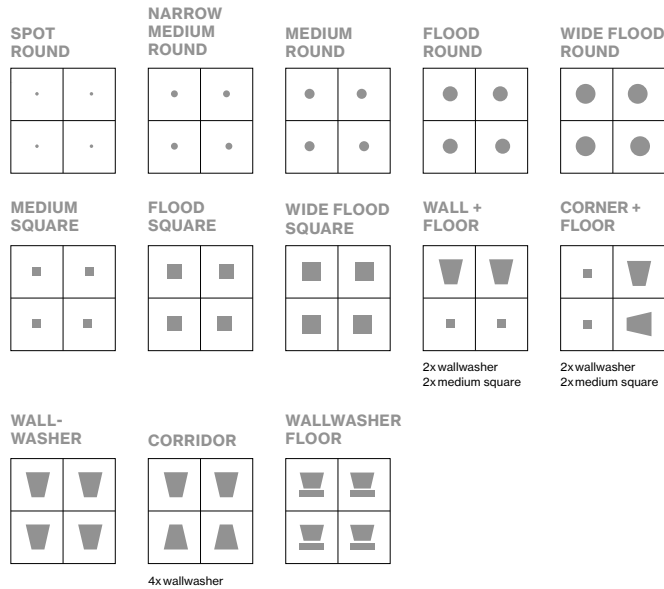

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1130 lm | 86 lm/W | 0 9 0 - 7 Q 4 4 <input checked="" type="checkbox"/> A 0 0 2 2 |
| | 3000 K | 1200 lm | 92 lm/W | 0 9 0 - 7 Q 4 5 <input checked="" type="checkbox"/> A 0 0 2 2 |
| | 4000 K | 1290 lm | 98 lm/W | 0 9 0 - 7 Q 4 6 <input checked="" type="checkbox"/> A 0 0 2 2 |

Order options

| CONTROL | | COLOUR | |
|---------|---|------------------|---|
| non DIM | 1 | chrome reflector | 0 |
| DALI-2 | 3 | black reflector | B |


WALLWASHER FLOOR CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|--------|--------------|-----------|----------|---|
| 13.1 W | 2700 K | 1180 lm | 90 lm/W | 0 9 0 - 7 Q 4 4 <input checked="" type="checkbox"/> W 0 <input checked="" type="checkbox"/> 2 1 |
| | 3000 K | 1250 lm | 95 lm/W | 0 9 0 - 7 Q 4 5 <input checked="" type="checkbox"/> W 0 <input checked="" type="checkbox"/> 2 1 |
| | 4000 K | 1340 lm | 102 lm/W | 0 9 0 - 7 Q 4 6 <input checked="" type="checkbox"/> W 0 <input checked="" type="checkbox"/> 2 1 |

Planning Information

Electrical mounting accessories (optional)

THROUGH WIRING CONNECTION BOX


| TYPE | L-W-H (mm) | ORDER CODE |
|---------------------------|------------|-----------------------|
| non DIM cable ø 4 – 12 mm | 105-58-30 | 0 0 5 - 2 5 3 1 1 1 0 |
| DALI cable ø 4 – 12 mm | 105-58-30 | 0 0 5 - 2 5 5 1 1 1 0 |

Linect®-Ready

Mounting accessories (required)

MOUNTING SET trimless for plasterboard ceilings 12.5/15/20/25 mm

| L-W-H (mm) | ORDER CODE |
|------------|-----------------------|
| 47-47-47 | 0 9 0 - 7 Q 1 0 1 0 0 |

for UNICO Q1


MOUNTING SET trimless for plasterboard ceilings 12.5/15/20/25 mm

| L-W-H (mm) | ORDER CODE |
|------------|-----------------------|
| 85-85-47 | 0 9 0 - 7 Q 4 0 1 0 0 |

for UNICO Q4 | UNICO wall recessed 2 lamps


MOUNTING SET with trim for intermediate ceilings, 2-25 mm

| COLOUR | L-W-H (mm) | ORDER CODE |
|---------------|------------|-----------------------|
| jet black | 63-63-30 | 0 9 0 - 7 Q 1 0 2 0 B |
| traffic white | 63-63-30 | 0 9 0 - 7 Q 1 0 2 0 W |

for UNICO Q1

Order options

| CONTROL | | COLOUR | |
|---------|---|------------------|---|
| non DIM | 1 | chrome reflector | 0 |
| DALI-2 | 3 | black reflector | B |


MOUNTING SET with trim for intermediate ceilings, 2-25 mm

| COLOUR | L-W-H (mm) | ORDER CODE |
|---------------|------------|-----------------------|
| jet black | 101-101-30 | 0 9 0 - 7 Q 4 0 2 0 B |
| traffic white | 101-101-30 | 0 9 0 - 7 Q 4 0 2 0 W |

for UNICO Q4 | UNICO wall recessed 2 lamps

Order options

| CONTROL | | COLOUR | |
|---------|---|------------------|---|
| non DIM | 1 | chrome reflector | 0 |
| DALI-2 | 3 | black reflector | B |

De House, Saint Niklaas

Belgio

Architetto

Jacobsen Architectura

Lighting Design

Rodrigo Jardim
(Illumination Strategic
Design Group)

Fotografo

Didier Engels Fernando
Guerra FG+SG



Prodotti utilizzati



**UNICO Q1 / Q4 basic
recessed**

