




Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90 / 2 SDCM (initial MacAdam), 3 SDCM (initial MacAdam)
 UGR ≤ 10, UGR ≤ 13, UGR ≤ 19
 fino a 130 lm/W
 L85 / 50000 h, L90 / 50000 h
 DALI-2, non DIM
 IP20

Types



Colore



Riflettore



Distribuzione della luce



UNICO L2 / L3 basic


ceiling

^{EN} Rectangular surface mounted multi-downlight made of aluminium; equipped with two (L2) / three (L3) individually selectable or pre-specified, customised light elements; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface powder coated; high-quality reflector with micro-faceted, aluminium-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering; clank-free


^{IT} Downlight multiplo rettangolare in alluminio con montaggio a superficie; dotata di due (L2) / tre (L3) lenti selezionabili individualmente o definite per applicazioni specifiche; corpo illuminante montabile ad appoggio senza attrezzi su piastra di montaggio tramite blocco di sicurezza; convertitore integrato nel corpo illuminante; verniciatura a polvere; riflettore di alta qualità con superficie a microfaccette e vaporizzata in alluminio; emissione precisa con diversi fasci luminosi simmetrici; o con distribuzione asimmetrica della luce; LED high power a risparmio energetico con ottima resa cromatica; senza distorsione




one luminaire
multiple scenes



black & gold
reflector
(optional)



tunable white
2700 – 5000 K
(optional)




UNICO L2 basic high efficient ceiling



FLOOD ROUND 46°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	2700 K	1090 lm	110 lm/W	0 9 0 - 1 L 2 9 ⇄ C ■ ■ 1 1
	3000 K	1090 lm	110 lm/W	0 9 0 - 1 L 2 0 ⇄ C ■ ■ 1 1
	3500 K	1140 lm	115 lm/W	0 9 0 - 1 L 2 2 ⇄ C ■ ■ 1 1
	4000 K	1160 lm	117 lm/W	0 9 0 - 1 L 2 1 ⇄ C ■ ■ 1 1



WIDE FLOOD ROUND 71°, CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	2700 K	1120 lm	113 lm/W	0 9 0 - 1 L 2 9 ⇄ D ■ ■ 1 1
	3000 K	1120 lm	113 lm/W	0 9 0 - 1 L 2 0 ⇄ D ■ ■ 1 1
	3500 K	1170 lm	118 lm/W	0 9 0 - 1 L 2 2 ⇄ D ■ ■ 1 1
	4000 K	1190 lm	120 lm/W	0 9 0 - 1 L 2 1 ⇄ D ■ ■ 1 1

FLOOD SQUARE 54°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	2700 K	1150 lm	116 lm/W	0 9 0 - 1 L 2 9 ⇄ F ■ ■ 1 1
	3000 K	1150 lm	116 lm/W	0 9 0 - 1 L 2 0 ⇄ F ■ ■ 1 1
	3500 K	1190 lm	120 lm/W	0 9 0 - 1 L 2 2 ⇄ F ■ ■ 1 1
	4000 K	1220 lm	123 lm/W	0 9 0 - 1 L 2 1 ⇄ F ■ ■ 1 1

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	2700 K	1180 lm	119 lm/W	0 9 0 - 1 L 2 9 ⇄ G ■ ■ 1 1
	3000 K	1180 lm	119 lm/W	0 9 0 - 1 L 2 0 ⇄ G ■ ■ 1 1
	3500 K	1230 lm	124 lm/W	0 9 0 - 1 L 2 2 ⇄ G ■ ■ 1 1
	4000 K	1250 lm	126 lm/W	0 9 0 - 1 L 2 1 ⇄ G ■ ■ 1 1




UNICO L2 basic ceiling



SPOT ROUND 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	662 lm	53 lm/W	0 9 0 - 1 L 2 4 ⇄ K ■ 0 0 1
	3000 K	706 lm	56 lm/W	0 9 0 - 1 L 2 5 ⇄ K ■ 0 0 1
	4000 K	757 lm	60 lm/W	0 9 0 - 1 L 2 6 ⇄ K ■ 0 0 1



Order options

CONTROL		COLOUR		REFLECTOR	
non DIM	1	gold dust RAL 260-M	9	black	B
DALI-2	3	jet black RAL 9005	B	chrome	0
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

NARROW MEDIUM ROUND 22°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	673 lm	53 lm/W	0 9 0 - 1 L 2 4 <input checked="" type="checkbox"/> N <input checked="" type="checkbox"/> 0 0 1
	3000 K	717 lm	57 lm/W	0 9 0 - 1 L 2 5 <input checked="" type="checkbox"/> N <input checked="" type="checkbox"/> 0 0 1
	4000 K	769 lm	61 lm/W	0 9 0 - 1 L 2 6 <input checked="" type="checkbox"/> N <input checked="" type="checkbox"/> 0 0 1

MEDIUM ROUND 33°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	899 lm	71 lm/W	0 9 0 - 1 L 2 4 <input checked="" type="checkbox"/> B <input checked="" type="checkbox"/> 0 0 1
	3000 K	958 lm	76 lm/W	0 9 0 - 1 L 2 5 <input checked="" type="checkbox"/> B <input checked="" type="checkbox"/> 0 0 1
	4000 K	1030 lm	82 lm/W	0 9 0 - 1 L 2 6 <input checked="" type="checkbox"/> B <input checked="" type="checkbox"/> 0 0 1

FLOOD ROUND 49°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	1030 lm	82 lm/W	0 9 0 - 1 L 2 4 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 0 0 1
	3000 K	1100 lm	87 lm/W	0 9 0 - 1 L 2 5 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 0 0 1
	4000 K	1180 lm	94 lm/W	0 9 0 - 1 L 2 6 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 0 0 1

WIDE FLOOD ROUND 72°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	1020 lm	81 lm/W	0 9 0 - 1 L 2 4 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 0 0 1
	3000 K	1090 lm	87 lm/W	0 9 0 - 1 L 2 5 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 0 0 1
	4000 K	1170 lm	93 lm/W	0 9 0 - 1 L 2 6 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 0 0 1

MEDIUM SQUARE 32°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	884 lm	70 lm/W	0 9 0 - 1 L 2 4 <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/> 0 0 1
	3000 K	942 lm	75 lm/W	0 9 0 - 1 L 2 5 <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/> 0 0 1
	4000 K	1010 lm	80 lm/W	0 9 0 - 1 L 2 6 <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/> 0 0 1

FLOOD SQUARE 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	1050 lm	83 lm/W	0 9 0 - 1 L 2 4 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 0 0 1
	3000 K	1120 lm	89 lm/W	0 9 0 - 1 L 2 5 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 0 0 1
	4000 K	1200 lm	95 lm/W	0 9 0 - 1 L 2 6 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 0 0 1

RECTANGULAR MEDIUM 34°x69°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	912 lm	72 lm/W	0 9 0 - 1 L 2 4 <input checked="" type="checkbox"/> R <input checked="" type="checkbox"/> 0 0 1
	3000 K	972 lm	77 lm/W	0 9 0 - 1 L 2 5 <input checked="" type="checkbox"/> R <input checked="" type="checkbox"/> 0 0 1
	4000 K	1040 lm	83 lm/W	0 9 0 - 1 L 2 6 <input checked="" type="checkbox"/> R <input checked="" type="checkbox"/> 0 0 1

Order options

CONTROL		COLOUR		REFLECTOR	
non DIM	<input type="checkbox"/>	gold dust RAL 260-M	<input checked="" type="checkbox"/>	black	<input checked="" type="checkbox"/> B
DALI-2	<input checked="" type="checkbox"/> 3	jet black RAL 9005	<input type="checkbox"/> B	chrome	<input type="checkbox"/> 0
		white aluminium RAL 9006	<input type="checkbox"/> G		
		traffic white RAL 9016	<input type="checkbox"/> W		

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	1080 lm	86 lm/W	0 9 0 - 1 L 2 4 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> ■ 0 1
	3000 K	1150 lm	91 lm/W	0 9 0 - 1 L 2 5 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> ■ 0 1
	4000 K	1240 lm	98 lm/W	0 9 0 - 1 L 2 6 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> ■ 0 1

WALLWASHER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	914 lm	73 lm/W	0 9 0 - 1 L 2 4 <input checked="" type="checkbox"/> A <input checked="" type="checkbox"/> ■ 0 0 1
	3000 K	974 lm	77 lm/W	0 9 0 - 1 L 2 5 <input checked="" type="checkbox"/> A <input checked="" type="checkbox"/> ■ 0 0 1
	4000 K	1050 lm	83 lm/W	0 9 0 - 1 L 2 6 <input checked="" type="checkbox"/> A <input checked="" type="checkbox"/> ■ 0 0 1

WALL FLOOR CORRIDOR CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	953 lm	76 lm/W	0 9 0 - 1 L 2 4 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> ■ 0 1
	3000 K	1020 lm	81 lm/W	0 9 0 - 1 L 2 5 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> ■ 0 1
	4000 K	1090 lm	87 lm/W	0 9 0 - 1 L 2 6 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> ■ 0 1

WALL FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	953 lm	76 lm/W	0 9 0 - 1 L 2 4 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> ■ 0 2
	3000 K	1020 lm	81 lm/W	0 9 0 - 1 L 2 5 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> ■ 0 2
	4000 K	1090 lm	87 lm/W	0 9 0 - 1 L 2 6 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> ■ 0 2

**UNICO L3 basic high efficient ceiling****FLOOD ROUND 46°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.5 W	2700 K	1640 lm	113 lm/W	0 9 0 - 1 L 3 9 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> ■ 1 1
	3000 K	1640 lm	113 lm/W	0 9 0 - 1 L 3 0 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> ■ 1 1
	3500 K	1710 lm	118 lm/W	0 9 0 - 1 L 3 2 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> ■ 1 1
	4000 K	1740 lm	120 lm/W	0 9 0 - 1 L 3 1 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> ■ 1 1

**WIDE FLOOD ROUND 71°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.5 W	2700 K	1680 lm	116 lm/W	0 9 0 - 1 L 3 9 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> ■ 1 1
	3000 K	1680 lm	116 lm/W	0 9 0 - 1 L 3 0 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> ■ 1 1
	3500 K	1760 lm	121 lm/W	0 9 0 - 1 L 3 2 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> ■ 1 1
	4000 K	1790 lm	123 lm/W	0 9 0 - 1 L 3 1 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> ■ 1 1

Order options

CONTROL		COLOUR		REFLECTOR	
non DIM	1	gold dust RAL 260-M	9	black	B
DALI-2	3	jet black RAL 9005	B	chrome	0
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

FLOOD SQUARE 54°, CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.5 W	2700 K	1720 lm	119 lm/W	0 9 0 - 1 L 3 9 ◊ F ■ 1 1
	3000 K	1720 lm	119 lm/W	0 9 0 - 1 L 3 0 ◊ F ■ 1 1
	3500 K	1790 lm	123 lm/W	0 9 0 - 1 L 3 2 ◊ F ■ 1 1
	4000 K	1830 lm	126 lm/W	0 9 0 - 1 L 3 1 ◊ F ■ 1 1

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.5 W	2700 K	1770 lm	122 lm/W	0 9 0 - 1 L 3 9 ◊ G ■ 1 1
	3000 K	1770 lm	122 lm/W	0 9 0 - 1 L 3 0 ◊ G ■ 1 1
	3500 K	1840 lm	127 lm/W	0 9 0 - 1 L 3 2 ◊ G ■ 1 1
	4000 K	1880 lm	130 lm/W	0 9 0 - 1 L 3 1 ◊ G ■ 1 1

**UNICO L3 basic ceiling****SPOT ROUND 15°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	993 lm	55 lm/W	0 9 0 - 1 L 3 4 ◊ K ■ 0 0 1
	3000 K	1060 lm	59 lm/W	0 9 0 - 1 L 3 5 ◊ K ■ 0 0 1
	4000 K	1140 lm	64 lm/W	0 9 0 - 1 L 3 6 ◊ K ■ 0 0 1

**NARROW MEDIUM ROUND 22°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1010 lm	56 lm/W	0 9 0 - 1 L 3 4 ◊ N ■ 0 0 1
	3000 K	1080 lm	60 lm/W	0 9 0 - 1 L 3 5 ◊ N ■ 0 0 1
	4000 K	1150 lm	64 lm/W	0 9 0 - 1 L 3 6 ◊ N ■ 0 0 1

MEDIUM ROUND 33°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1350 lm	75 lm/W	0 9 0 - 1 L 3 4 ◊ B ■ 0 0 1
	3000 K	1440 lm	80 lm/W	0 9 0 - 1 L 3 5 ◊ B ■ 0 0 1
	4000 K	1540 lm	86 lm/W	0 9 0 - 1 L 3 6 ◊ B ■ 0 0 1

FLOOD ROUND 49°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1550 lm	87 lm/W	0 9 0 - 1 L 3 4 ◊ C ■ 0 0 1
	3000 K	1650 lm	92 lm/W	0 9 0 - 1 L 3 5 ◊ C ■ 0 0 1
	4000 K	1770 lm	99 lm/W	0 9 0 - 1 L 3 6 ◊ C ■ 0 0 1

Order options

CONTROL	COLOUR	REFLECTOR
non DIM	gold dust RAL 260-M	black
DALI-2	jet black RAL 9005	chrome
	white aluminium RAL 9006	
	traffic white RAL 9016	

WIDE FLOOD ROUND 72°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1540 lm	86 lm/W	0 9 0 - 1 L 3 4 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 0 1
	3000 K	1640 lm	92 lm/W	0 9 0 - 1 L 3 5 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 0 1
	4000 K	1760 lm	98 lm/W	0 9 0 - 1 L 3 6 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 0 1

MEDIUM SQUARE 32°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1330 lm	74 lm/W	0 9 0 - 1 L 3 4 <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/> 0 1
	3000 K	1410 lm	79 lm/W	0 9 0 - 1 L 3 5 <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/> 0 1
	4000 K	1520 lm	85 lm/W	0 9 0 - 1 L 3 6 <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/> 0 1

FLOOD SQUARE 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1580 lm	88 lm/W	0 9 0 - 1 L 3 4 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 0 1
	3000 K	1680 lm	94 lm/W	0 9 0 - 1 L 3 5 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 0 1
	4000 K	1800 lm	101 lm/W	0 9 0 - 1 L 3 6 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 0 1

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1620 lm	91 lm/W	0 9 0 - 1 L 3 4 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 0 1
	3000 K	1730 lm	97 lm/W	0 9 0 - 1 L 3 5 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 0 1
	4000 K	1850 lm	103 lm/W	0 9 0 - 1 L 3 6 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 0 1

WALLWASHER CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1370 lm	77 lm/W	0 9 0 - 1 L 3 4 <input checked="" type="checkbox"/> A <input checked="" type="checkbox"/> 0 0 1
	3000 K	1460 lm	82 lm/W	0 9 0 - 1 L 3 5 <input checked="" type="checkbox"/> A <input checked="" type="checkbox"/> 0 0 1
	4000 K	1570 lm	88 lm/W	0 9 0 - 1 L 3 6 <input checked="" type="checkbox"/> A <input checked="" type="checkbox"/> 0 0 1

Order options


CONTROL		COLOUR		REFLECTOR	
non DIM	1	gold dust RAL 260-M	9	black	B
DALI-2	3	jet black RAL 9005	B	chrome	0
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

Planning Information

L2 CEILING

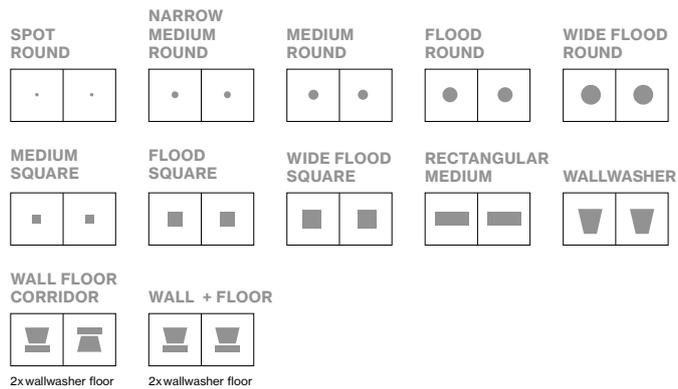

L3 CEILING

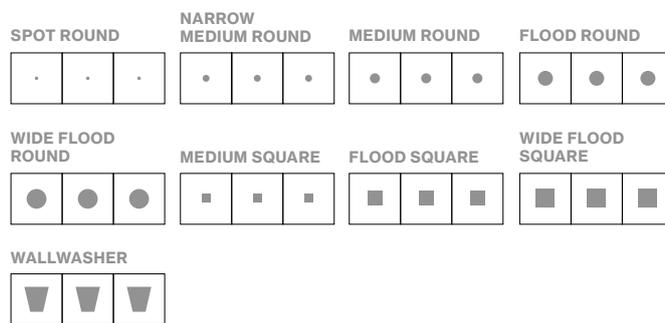

Order options

CONTROL		COLOUR	<input checked="" type="checkbox"/>	REFLECTOR	
non DIM	1	gold dust RAL 260-M	9	black	B
DALI-2	3	jet black RAL 9005	B	chrome	O
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

Office S3 Architecten, Mechelen

Belgio

Architetto
S3 Architecten

Fotografo
Kris Dekeijser



Prodotti utilizzati



UNICO L4 / L6 ceiling



UNICO L2 / L3 ceiling




UNICO L4 / L6 basic ceiling



UNICO L2 / L3 basic ceiling




TULA suspended



MOVE IT 25 surface /
suspended system



L10 OFFICE MOVE IT
45



MOVE IT 45 surface /
suspended system



JUST 45 MOVE IT
25 / 25 S / 45



SPOTLINE MOVE IT
25

