




Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90 / 2 SDCM (initial MacAdam), 3 SDCM (initial MacAdam)
 UGR ≤ 10, UGR ≤ 19
 fino a 132 lm/W
 L85 / 50000 h, L90 / 50000 h
 DALI-2, non DIM
 IP20

Types



Colore



Riflettore



Distribuzione della luce



UNICO L4 / L6 basic


ceiling

^{EN} Rectangular surface mounted multi-downlight made of aluminium; equipped with four (L4) / six (L6) individually selectable or pre-specified, customised light elements; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface powder coated; high-quality reflector with micro-faceted, aluminium-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering; clank-free

^{IT} Downlight multiplo rettangolare in alluminio con montaggio a superficie; dotata di quattro (L4) / sei (L6) lenti selezionabili individualmente o definite per applicazioni specifiche; corpo illuminante montabile ad appoggio senza attrezzi su piastra di montaggio tramite blocco di sicurezza; convertitore integrato nel corpo illuminante; verniciatura a polvere; riflettore di alta qualità con superficie a microfacette e vaporizzata in alluminio; emissione precisa con diversi fasci luminosi simmetrici; o con distribuzione asimmetrica della luce; LED high power a risparmio energetico con ottima resa cromatica; senza distorsione




one luminaire multiple scenes



black & gold reflector (optional)



tunable white 2700 – 5000 K (optional)




UNICO L4 basic high efficient ceiling



FLOOD ROUND 46°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
15.3 W	2700 K	1750 lm	114 lm/W	0 9 0 - 1 L 4 9 ⇄ C ■ 1 1
	3000 K	1750 lm	114 lm/W	0 9 0 - 1 L 4 0 ⇄ C ■ 1 1
	3500 K	1830 lm	120 lm/W	0 9 0 - 1 L 4 2 ⇄ C ■ 1 1
	4000 K	1860 lm	122 lm/W	0 9 0 - 1 L 4 1 ⇄ C ■ 1 1



WIDE FLOOD ROUND 71°, CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
15.3 W	2700 K	1800 lm	118 lm/W	0 9 0 - 1 L 4 9 ⇄ D ■ 1 1
	3000 K	1800 lm	118 lm/W	0 9 0 - 1 L 4 0 ⇄ D ■ 1 1
	3500 K	1880 lm	123 lm/W	0 9 0 - 1 L 4 2 ⇄ D ■ 1 1
	4000 K	1920 lm	125 lm/W	0 9 0 - 1 L 4 1 ⇄ D ■ 1 1

FLOOD SQUARE 54°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
15.3 W	2700 K	1840 lm	120 lm/W	0 9 0 - 1 L 4 9 ⇄ F ■ 1 1
	3000 K	1840 lm	120 lm/W	0 9 0 - 1 L 4 0 ⇄ F ■ 1 1
	3500 K	1920 lm	125 lm/W	0 9 0 - 1 L 4 2 ⇄ F ■ 1 1
	4000 K	1960 lm	128 lm/W	0 9 0 - 1 L 4 1 ⇄ F ■ 1 1

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
15.3 W	2700 K	1890 lm	124 lm/W	0 9 0 - 1 L 4 9 ⇄ G ■ 1 1
	3000 K	1890 lm	124 lm/W	0 9 0 - 1 L 4 0 ⇄ G ■ 1 1
	3500 K	1970 lm	129 lm/W	0 9 0 - 1 L 4 2 ⇄ G ■ 1 1
	4000 K	2010 lm	131 lm/W	0 9 0 - 1 L 4 1 ⇄ G ■ 1 1




UNICO L4 basic ceiling



SPOT ROUND 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1100 lm	57 lm/W	0 9 0 - 1 L 4 4 ⇄ K ■ 0 0 1
	3000 K	1180 lm	61 lm/W	0 9 0 - 1 L 4 5 ⇄ K ■ 0 0 1
	4000 K	1260 lm	65 lm/W	0 9 0 - 1 L 4 6 ⇄ K ■ 0 0 1



Order options

CONTROL	⇄	COLOUR	☑	REFLECTOR	■
non DIM	1	gold dust RAL 260-M	9	black	B
DALI-2	3	jet black RAL 9005	B	chrome	0
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

NARROW MEDIUM ROUND 22°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1120 lm	58 lm/W	0 9 0 - 1 L 4 4 <input checked="" type="checkbox"/> N <input checked="" type="checkbox"/> 0 0 1
	3000 K	1200 lm	62 lm/W	0 9 0 - 1 L 4 5 <input checked="" type="checkbox"/> N <input checked="" type="checkbox"/> 0 0 1
	4000 K	1280 lm	66 lm/W	0 9 0 - 1 L 4 6 <input checked="" type="checkbox"/> N <input checked="" type="checkbox"/> 0 0 1

MEDIUM ROUND 33°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1500 lm	78 lm/W	0 9 0 - 1 L 4 4 <input checked="" type="checkbox"/> B <input checked="" type="checkbox"/> 0 0 1
	3000 K	1600 lm	83 lm/W	0 9 0 - 1 L 4 5 <input checked="" type="checkbox"/> B <input checked="" type="checkbox"/> 0 0 1
	4000 K	1710 lm	89 lm/W	0 9 0 - 1 L 4 6 <input checked="" type="checkbox"/> B <input checked="" type="checkbox"/> 0 0 1

FLOOD ROUND 49°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1720 lm	89 lm/W	0 9 0 - 1 L 4 4 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 0 0 1
	3000 K	1840 lm	95 lm/W	0 9 0 - 1 L 4 5 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 0 0 1
	4000 K	1970 lm	102 lm/W	0 9 0 - 1 L 4 6 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 0 0 1

WIDE FLOOD ROUND 72°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1710 lm	89 lm/W	0 9 0 - 1 L 4 4 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 0 0 1
	3000 K	1820 lm	94 lm/W	0 9 0 - 1 L 4 5 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 0 0 1
	4000 K	1950 lm	101 lm/W	0 9 0 - 1 L 4 6 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 0 0 1

MEDIUM SQUARE 32°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1470 lm	76 lm/W	0 9 0 - 1 L 4 4 <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/> 0 0 1
	3000 K	1570 lm	81 lm/W	0 9 0 - 1 L 4 5 <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/> 0 0 1
	4000 K	1680 lm	87 lm/W	0 9 0 - 1 L 4 6 <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/> 0 0 1

FLOOD SQUARE 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1750 lm	91 lm/W	0 9 0 - 1 L 4 4 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 0 0 1
	3000 K	1870 lm	97 lm/W	0 9 0 - 1 L 4 5 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 0 0 1
	4000 K	2000 lm	104 lm/W	0 9 0 - 1 L 4 6 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 0 0 1

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1800 lm	93 lm/W	0 9 0 - 1 L 4 4 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 0 0 1
	3000 K	1920 lm	99 lm/W	0 9 0 - 1 L 4 5 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 0 0 1
	4000 K	2060 lm	107 lm/W	0 9 0 - 1 L 4 6 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 0 0 1

Order options

CONTROL		COLOUR		REFLECTOR	
non DIM	<input type="checkbox"/>	gold dust RAL 260-M	<input checked="" type="checkbox"/>	black	<input checked="" type="checkbox"/> B
DALI-2	<input checked="" type="checkbox"/> 3	jet black RAL 9005	<input type="checkbox"/> B	chrome	<input type="checkbox"/> 0
		white aluminium RAL 9006	<input type="checkbox"/> G		
		traffic white RAL 9016	<input type="checkbox"/> W		

WALLWASHER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1520 lm	79 lm/W	0 9 0 - 1 L 4 4 <input checked="" type="checkbox"/> A <input checked="" type="checkbox"/> 0 0 1
	3000 K	1620 lm	84 lm/W	0 9 0 - 1 L 4 5 <input checked="" type="checkbox"/> A <input checked="" type="checkbox"/> 0 0 1
	4000 K	1740 lm	90 lm/W	0 9 0 - 1 L 4 6 <input checked="" type="checkbox"/> A <input checked="" type="checkbox"/> 0 0 1

WALL FLOOR CORRIDOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1590 lm	82 lm/W	0 9 0 - 1 L 4 4 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> 0 0 1
	3000 K	1690 lm	88 lm/W	0 9 0 - 1 L 4 5 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> 0 0 1
	4000 K	1820 lm	94 lm/W	0 9 0 - 1 L 4 6 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> 0 0 1

WALL FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
19.3 W	2700 K	1590 lm	82 lm/W	0 9 0 - 1 L 4 4 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> 0 0 2
	3000 K	1690 lm	88 lm/W	0 9 0 - 1 L 4 5 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> 0 0 2
	4000 K	1820 lm	94 lm/W	0 9 0 - 1 L 4 6 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> 0 0 2

**UNICO L6 basic high efficient ceiling****FLOOD ROUND 46°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
23.0 W	2700 K	2640 lm	115 lm/W	0 9 0 - 1 L 6 9 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 1 1 1
	3000 K	2640 lm	115 lm/W	0 9 0 - 1 L 6 0 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 1 1 1
	3500 K	2750 lm	120 lm/W	0 9 0 - 1 L 6 2 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 1 1 1
	4000 K	2810 lm	122 lm/W	0 9 0 - 1 L 6 1 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 1 1 1

**WIDE FLOOD ROUND 71°, CRI ≥ 90**

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
23.0 W	2700 K	2720 lm	118 lm/W	0 9 0 - 1 L 6 9 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 1 1 1
	3000 K	2720 lm	118 lm/W	0 9 0 - 1 L 6 0 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 1 1 1
	3500 K	2830 lm	123 lm/W	0 9 0 - 1 L 6 2 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 1 1 1
	4000 K	2890 lm	126 lm/W	0 9 0 - 1 L 6 1 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 1 1 1

FLOOD SQUARE 54°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
23.0 W	2700 K	2780 lm	121 lm/W	0 9 0 - 1 L 6 9 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 1 1 1
	3000 K	2780 lm	121 lm/W	0 9 0 - 1 L 6 0 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 1 1 1
	3500 K	2890 lm	126 lm/W	0 9 0 - 1 L 6 2 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 1 1 1
	4000 K	2950 lm	128 lm/W	0 9 0 - 1 L 6 1 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 1 1 1

Order options

CONTROL		COLOUR		REFLECTOR	
non DIM	1	gold dust RAL 260-M	9	black	B
DALI-2	3	jet black RAL 9005	B	chrome	0
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
23.0 W	2700 K	2850 lm	124 lm/W	0 9 0 - 1 L 6 9 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 1 1
	3000 K	2850 lm	124 lm/W	0 9 0 - 1 L 6 0 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 1 1
	3500 K	2970 lm	129 lm/W	0 9 0 - 1 L 6 2 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 1 1
	4000 K	3030 lm	132 lm/W	0 9 0 - 1 L 6 1 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 1 1


UNICO L6 basic ceiling

SPOT ROUND 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	1610 lm	59 lm/W	0 9 0 - 1 L 6 4 <input checked="" type="checkbox"/> K <input checked="" type="checkbox"/> 0 0 1
	3000 K	1710 lm	63 lm/W	0 9 0 - 1 L 6 5 <input checked="" type="checkbox"/> K <input checked="" type="checkbox"/> 0 0 1
	4000 K	1840 lm	68 lm/W	0 9 0 - 1 L 6 6 <input checked="" type="checkbox"/> K <input checked="" type="checkbox"/> 0 0 1


NARROW MEDIUM ROUND 22°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	1630 lm	60 lm/W	0 9 0 - 1 L 6 4 <input checked="" type="checkbox"/> N <input checked="" type="checkbox"/> 0 0 1
	3000 K	1740 lm	64 lm/W	0 9 0 - 1 L 6 5 <input checked="" type="checkbox"/> N <input checked="" type="checkbox"/> 0 0 1
	4000 K	1870 lm	69 lm/W	0 9 0 - 1 L 6 6 <input checked="" type="checkbox"/> N <input checked="" type="checkbox"/> 0 0 1

MEDIUM ROUND 33°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2180 lm	80 lm/W	0 9 0 - 1 L 6 4 <input checked="" type="checkbox"/> B <input checked="" type="checkbox"/> 0 0 1
	3000 K	2320 lm	86 lm/W	0 9 0 - 1 L 6 5 <input checked="" type="checkbox"/> B <input checked="" type="checkbox"/> 0 0 1
	4000 K	2490 lm	92 lm/W	0 9 0 - 1 L 6 6 <input checked="" type="checkbox"/> B <input checked="" type="checkbox"/> 0 0 1

FLOOD ROUND 49°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2510 lm	93 lm/W	0 9 0 - 1 L 6 4 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 0 0 1
	3000 K	2670 lm	99 lm/W	0 9 0 - 1 L 6 5 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 0 0 1
	4000 K	2870 lm	106 lm/W	0 9 0 - 1 L 6 6 <input checked="" type="checkbox"/> C <input checked="" type="checkbox"/> 0 0 1

WIDE FLOOD ROUND 72°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2480 lm	92 lm/W	0 9 0 - 1 L 6 4 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 0 0 1
	3000 K	2650 lm	98 lm/W	0 9 0 - 1 L 6 5 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 0 0 1
	4000 K	2840 lm	105 lm/W	0 9 0 - 1 L 6 6 <input checked="" type="checkbox"/> D <input checked="" type="checkbox"/> 0 0 1

Order options

CONTROL		COLOUR		REFLECTOR	
non DIM	1	gold dust RAL 260-M	9	black	B
DALI-2	3	jet black RAL 9005	B	chrome	0
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

MEDIUM SQUARE 32°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2140 lm	79 lm/W	0 9 0 - 1 L 6 4 <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/> 0 1
	3000 K	2280 lm	84 lm/W	0 9 0 - 1 L 6 5 <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/> 0 1
	4000 K	2450 lm	90 lm/W	0 9 0 - 1 L 6 6 <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/> 0 1

FLOOD SQUARE 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2550 lm	94 lm/W	0 9 0 - 1 L 6 4 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 0 1
	3000 K	2720 lm	100 lm/W	0 9 0 - 1 L 6 5 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 0 1
	4000 K	2920 lm	108 lm/W	0 9 0 - 1 L 6 6 <input checked="" type="checkbox"/> F <input checked="" type="checkbox"/> 0 1

RECTANGULAR MEDIUM 34°x69°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2210 lm	82 lm/W	0 9 0 - 1 L 6 4 <input checked="" type="checkbox"/> R <input checked="" type="checkbox"/> 0 1
	3000 K	2360 lm	87 lm/W	0 9 0 - 1 L 6 5 <input checked="" type="checkbox"/> R <input checked="" type="checkbox"/> 0 1
	4000 K	2530 lm	93 lm/W	0 9 0 - 1 L 6 6 <input checked="" type="checkbox"/> R <input checked="" type="checkbox"/> 0 1

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2620 lm	97 lm/W	0 9 0 - 1 L 6 4 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 0 1
	3000 K	2790 lm	103 lm/W	0 9 0 - 1 L 6 5 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 0 1
	4000 K	3000 lm	111 lm/W	0 9 0 - 1 L 6 6 <input checked="" type="checkbox"/> G <input checked="" type="checkbox"/> 0 1

WALLWASHER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2220 lm	82 lm/W	0 9 0 - 1 L 6 4 <input checked="" type="checkbox"/> A <input checked="" type="checkbox"/> 0 0 1
	3000 K	2360 lm	87 lm/W	0 9 0 - 1 L 6 5 <input checked="" type="checkbox"/> A <input checked="" type="checkbox"/> 0 0 1
	4000 K	2540 lm	94 lm/W	0 9 0 - 1 L 6 6 <input checked="" type="checkbox"/> A <input checked="" type="checkbox"/> 0 0 1

WALL FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
27.1 W	2700 K	2310 lm	85 lm/W	0 9 0 - 1 L 6 4 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> 0 0 1
	3000 K	2460 lm	91 lm/W	0 9 0 - 1 L 6 5 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> 0 0 1
	4000 K	2640 lm	97 lm/W	0 9 0 - 1 L 6 6 <input checked="" type="checkbox"/> W <input checked="" type="checkbox"/> 0 0 1

Order options

CONTROL		COLOUR		REFLECTOR	
non DIM	1	gold dust RAL 260-M	9	black	B
DALI-2	3	jet black RAL 9005	B	chrome	0
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		


Planning Information

L4 CEILING


SPOT ROUND



NARROW MEDIUM ROUND



MEDIUM ROUND



FLOOD ROUND



WIDE FLOOD ROUND



MEDIUM SQUARE



WIDE FLOOD SQUARE



WALLWASHER



WALL FLOOR CORRIDOR



4x wallwasher floor


WALL + FLOOR




4x wallwasher floor

L6 CEILING


SPOT ROUND




NARROW MEDIUM ROUND



MEDIUM ROUND



FLOOD ROUND



WIDE FLOOD ROUND



MEDIUM SQUARE



FLOOD SQUARE



RECTANGULAR MEDIUM



WIDE FLOOD SQUARE



WALLWASHER



WALL + FLOOR



6x wallwasher floor

Order options

CONTROL

non DIM

DALI-2



1

3

COLOUR

gold dust RAL 260-M

jet black RAL 9005

white aluminium RAL 9006

traffic white RAL 9016



REFLECTOR

black

chrome

B


0

New Babylon, The Hague

Paesi Bassi

Architetto
Studio Linse

Fotografo
Kris Dekeijser

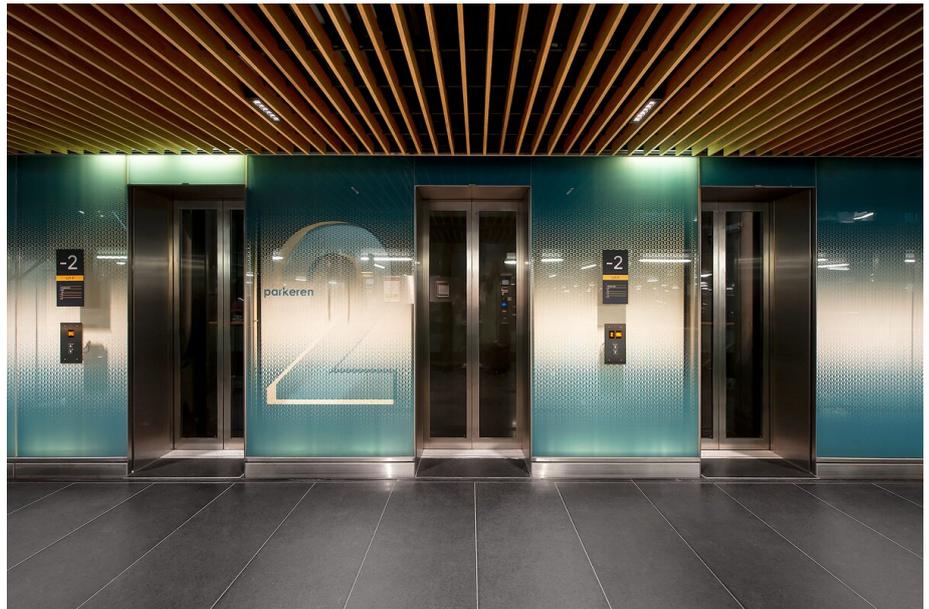

Prodotti utilizzati



**UNICO L4 / L6
recessed**



**MINO 60 CIRCLE
suspended**



**UNICO L4 / L6 basic
ceiling**



**UNICO L4 / L6 basic
recessed**

