


YAL


TASK

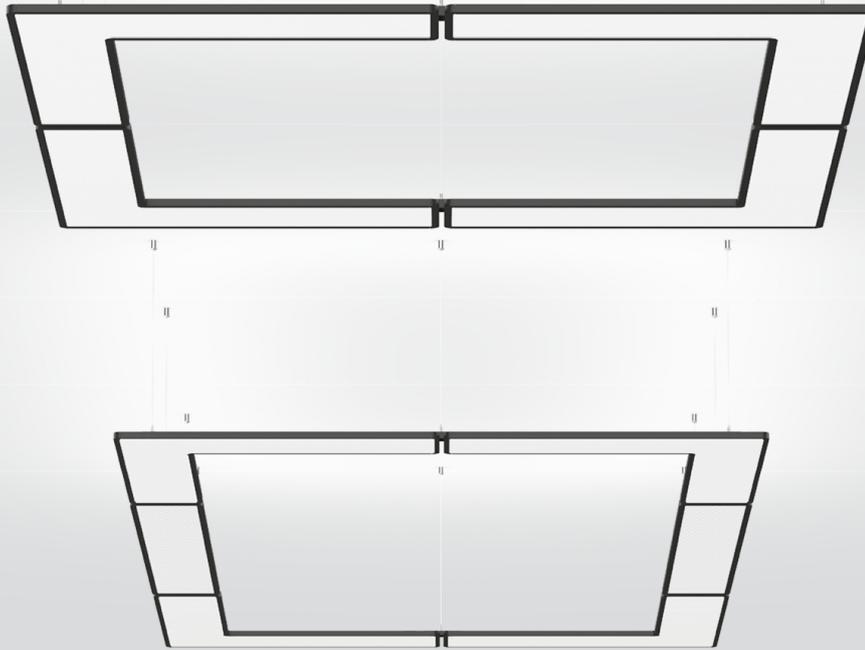

Quickinfo

4000 K
 CRI \geq 90 / 3 SDCM (initial MacAdam)
 UGR \leq 19
 fino a \downarrow 22,100 lm / \uparrow 11,500 lm
 fino a 120 lm/W
 L90 / 50000 h
 DALI-2
 Microprismatic
 IP20

Types

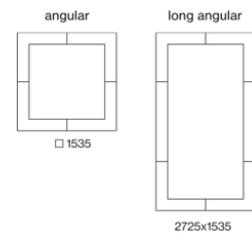

Colore



Distribuzione della luce



TASK angular

suspended

^{EN} Rectangular suspended luminaire, consisting of single L-shaped or rectangular elements; Luminaire housing made of aluminium with rounded edges; ultra low-profile design (only 15 mm); surface powder coated; cable suspension, toolless height adjustment; convenient quick mounting system without tools; incl. feeder cable; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect light component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; canopy for through wiring; optional acoustic elements available


^{IT} Corpo illuminante a sospensione di forma rettangolare, composto da singoli elementi a L o rettangolari; Corpo illuminante in alluminio con bordi arrotondati; forma ultrapiatta (solo 15 mm); verniciatura a polvere; cavo regolabile in altezza senza attrezzi; pratico sistema di montaggio rapido senza utensili; incl. cavo di alimentazione; distribuzione della luce diretta con sistema LGP-Body (Light Guiding Prism); luce convogliata lateralmente e direzionata in basso tramite incisione laser; percentuale indiretta con piastre a flusso luminoso potenziato e massima illuminazione del soffitto; illuminazione assolutamente omogenea; LED ad efficienza energetica con elevata resa cromatica; rosone per cablaggio passante; in opzione elementi acustici disponibile




DiiA[®] standards
 251, 252, 253




clicksystem



microprismatic
 UGR \leq 19





CRI \geq 98
 XPECTRUM
 (optional)

**TASK** angular suspended



DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
197.0 W	4000 K	↓15500/↑8050 lm	120 lm/W	0 5 9 - 5 2 8 3 1 3 <input checked="" type="checkbox"/> K

**TASK** long angular suspended

DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
282.0 W	4000 K	↓22100/↑11500 lm	119 lm/W	0 5 9 - 5 2 8 4 1 3 <input checked="" type="checkbox"/> K

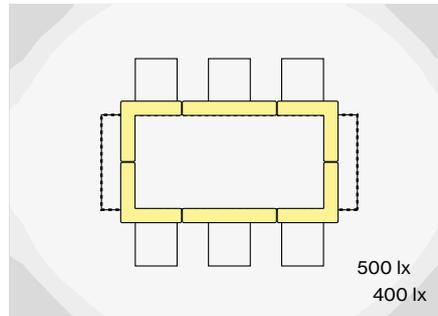**Planning Information****TASK** long angular, 280W, 4000K, direct/indirect power**ROOM VALUES**

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8
Suspension height	2.25 m

CALCULATION SURFACE

Surface dimensions	3.2 × 1.2 m
Surface height	0.75 m
Average illuminance (E_m)	> 500 lx
Uniformity (U_0)	> 0.6

GLARE EVALUATION

Table Classification	X=4H Y=8H S=0.25H
UGR transversal	≤ 19
UGR axial	≤ 19

**Order options**

COLOUR	<input checked="" type="checkbox"/>
pure white RAL 9010	7
jet black RAL 9005	8

Community Windpower, Frodsham

Regno Unito


Fotografo
Paul Karalius




Prodotti utilizzati



**TASK round
suspended**



**TASK angular
suspended**



**TASK circle
suspended**

