


YAL


TASK

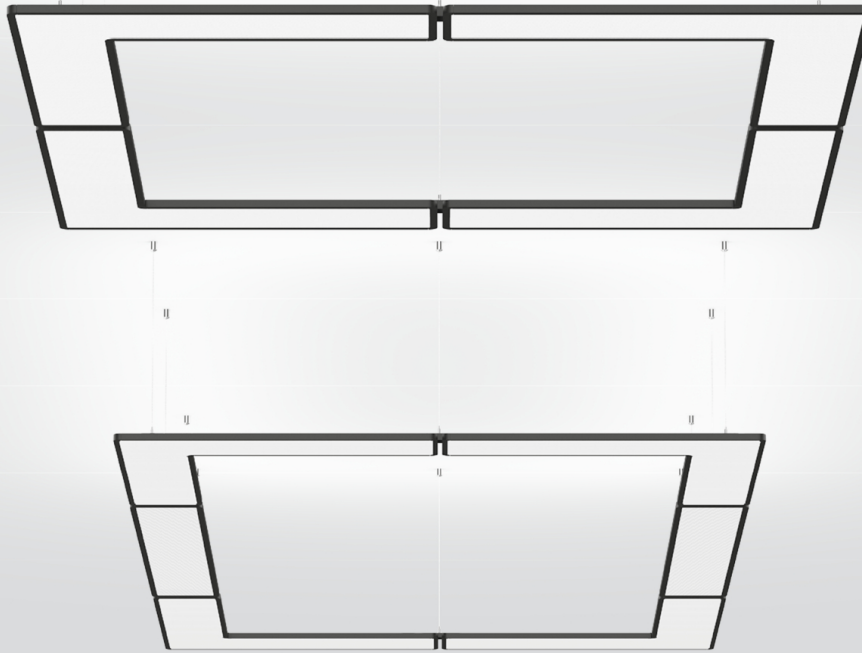

Quickinfo

4000 K
 CRI \geq 90 / 3 SDCM (initial MacAdam)
 UGR \leq 19
 fino a \downarrow 22,100 lm / \uparrow 11,500 lm
 fino a 120 lm/W
 L90 / 50000 h
 DALI-2
 Microprismatic
 IP20

Types



Colore



Distribuzione della luce



TASK angular

suspended

^{EN} Rectangular suspended luminaire, consisting of single L-shaped or rectangular elements; Luminaire housing made of aluminium with rounded edges; ultra low-profile design (only 15 mm); surface powder coated; cable suspension, toolless height adjustment; convenient quick mounting system without tools; incl. feeder cable; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect light component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; canopy for through wiring; optional acoustic elements available


^{IT} Corpo illuminante a sospensione di forma rettangolare, composto da singoli elementi a L o rettangolari; Corpo illuminante in alluminio con bordi arrotondati; forma ultrapiatta (solo 15 mm); verniciatura a polvere; cavo regolabile in altezza senza attrezzi; pratico sistema di montaggio rapido senza utensili; incl. cavo di alimentazione; distribuzione della luce diretta con sistema LGP-Body (Light Guiding Prism); luce convogliata lateralmente e direzionata in basso tramite incisione laser; percentuale indiretta con piastre a flusso luminoso potenziato e massima illuminazione del soffitto; illuminazione assolutamente omogenea; LED ad efficienza energetica con elevata resa cromatica; rosone per cablaggio passante; in opzione elementi acustici disponibile




DiiA[®] standards
 251, 252, 253




clicksystem



microprismatic
 UGR \leq 19



CRI \geq 98
 XPECTRUM
 (optional)





TASK angular suspended



DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---------|--------------|-----------------|----------|---|
| 197.0 W | 4000 K | ↓15500/↑8050 lm | 120 lm/W | 0 5 9 - 5 2 8 3 1 3 <input checked="" type="checkbox"/> K |




TASK long angular suspended




DIRECT / INDIRECT POWER CRI ≥ 90, DALI-2

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---------|--------------|------------------|----------|---|
| 282.0 W | 4000 K | ↓22100/↑11500 lm | 119 lm/W | 0 5 9 - 5 2 8 4 1 3 <input checked="" type="checkbox"/> K |



Planning Information



TASK long angular, 280W, 4000K, direct/indirect power

ROOM VALUES

| | |
|--------------------|-----------------|
| Room dimensions | 5.4 × 4 × 2.8 m |
| Reflection factor | 0.7 0.5 0.2 |
| Maintenance factor | 0.8 |
| Suspension height | 2.25 m |

CALCULATION SURFACE

| | |
|---------------------------------------|-------------|
| Surface dimensions | 3.2 × 1.2 m |
| Surface height | 0.75 m |
| Average illuminance (E _m) | > 500 lx |
| Uniformity (U ₀) | > 0.6 |



GLARE EVALUATION

| | |
|--|------|
| Table Classification X=4H Y=8H S=0.25H | |
| UGR transversal | ≤ 19 |
| UGR axial | ≤ 19 |

Order options

| COLOUR | <input checked="" type="checkbox"/> |
|---------------------|-------------------------------------|
| pure white RAL 9010 | 7 |
| jet black RAL 9005 | 8 |

Community Windpower, Frodsham

Regno Unito


Fotografo
Paul Karalius




Prodotti utilizzati



**TASK round
suspended**



**TASK angular
suspended**



**TASK circle
suspended**

