
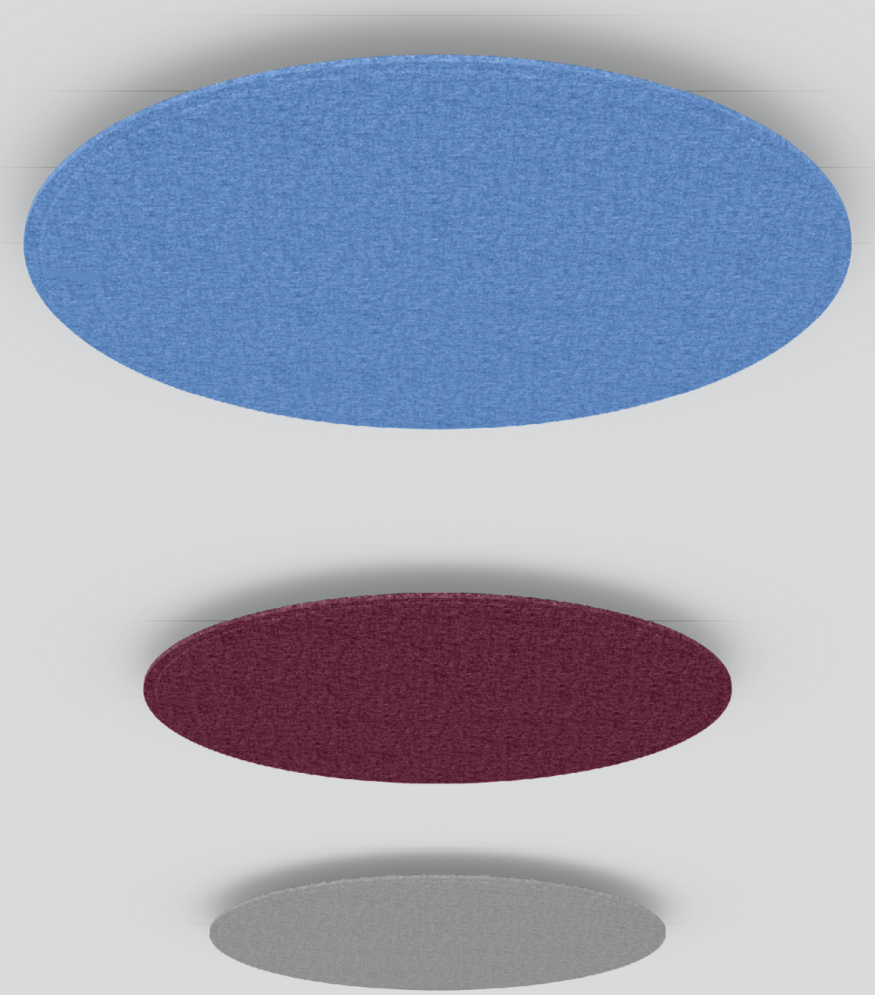


Quickinfo

feltro PET composto da almeno il 50% di materiale riciclato post-consumer
fino a classe di assorbimento acustico A
disponibile la versione ritardante di fiamma

Types



Colours



TASK acoustic round


EN Acoustic element made of high quality, self-supporting, at least 75% recycled PET felt with sound absorbing properties; choice of round or half round design; high quality visual and tactile surface; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; choice of surface mounted and pendant versions with 1500 mm cable suspension; toolless suspension height adjustment of the acoustic element; up to absorption class A

IT Elemento acustico in feltro prodotto con PET riciclato per almeno il 75%, alta qualità, autoportante e con proprietà fonoassorbenti; forma a scelta tra rotonda o semicircolare; finitura con caratteristiche estetiche e tattili di alta qualità; possibili variazioni cromatiche; assorbimento del suono diretto grazie al tessuto non tessuto anteriore e assorbimento del suono riflesso dal soffitto/parete mediante tessuto non tessuto aggiuntivo posto sul retro; con elevata performance acustica; a scelta tra versione applicata o sospesa con cavo a sospensione da 1500 mm; regolazione in altezza senza attrezzi sull'elemento acustico; fino a classe di assorbimento acustico A



made of at least 75% post-consumer recycled PET felt





TASK ACOUSTIC round surface

A B **C** D E
α_w = 0.6

PET felt

0.75 NRC


0.76 SAA

COLOUR	ORDER CODE
acoustic special colours	059-57913DX
anthracite	059-57913DB
black	059-57913DL
felt grey	059-57913DG
limestone	059-57913DS
marble grey	059-57913DD
white	059-57913DW

EQUIVALENT SOUND ABSORPTION AREA (A_{EQ} M^2)

Ø(mm)	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
600	0.01	0.08	0.2	0.28	0.28	0.28
900	0.03	0.19	0.45	0.64	0.64	0.64
1155	0.05	0.31	0.73	1.05	1.05	1.05





TASK ACOUSTIC half round surface

A B **C** D E
α_w = 0.6

PET felt

0.75 NRC

0.76 SAA

COLOUR	ORDER CODE
acoustic special colours	059-57914 6X
anthracite	059-57914 6B
black	059-57914 6L
felt grey	059-57914 6G
limestone	059-57914 6S
marble grey	059-57914 6D
white	059-57914 6W

EQUIVALENT SOUND ABSORPTION AREA (A_{EQ} M^2)


125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
0.03	0.16	0.37	0.53	0.53	0.53

Order options

DIAMETER	D
600 mm	4
900 mm	5
1155 mm	6

COLOUR	
anthracite	RAL 7021
marble grey	RAL 7047
felt grey	RAL 7037
limestone	RAL 070 70 20





TASK ACOUSTIC round suspended

A B C D E
α_w = 0.95

PET felt

0.95 NRC


0.91 SAA

COLOUR	ORDER CODE
acoustic special colours	059-579233DX
anthracite	059-579233DB
black	059-579233DL
felt grey	059-579233DG
limestone	059-579233DS
marble grey	059-579233DD
white	059-579233DW

EQUIVALENT SOUND ABSORPTION AREA (A_{EQ} M^2)

Ø(mm)	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
600	0.21	0.22	0.36	0.43	0.49	0.53
900	0.47	0.5	0.8	0.97	1.1	1.2
1155	0.6	0.77	1.23	1.53	1.8	1.87





TASK ACOUSTIC half round suspended

A B C D E
α_w = 0.95

PET felt

0.95 NRC

0.91 SAA

COLOUR	ORDER CODE
acoustic special colours	059-579246X
anthracite	059-579246B
black	059-579246L
felt grey	059-579246G
limestone	059-579246S
marble grey	059-579246D
white	059-579246W

EQUIVALENT SOUND ABSORPTION AREA (A_{EQ} M^2)


125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
0.3	0.33	0.6	0.77	0.87	0.87

Order options

DIAMETER	D
600 mm	4
900 mm	5
1155 mm	6


COLOUR	
anthracite	RAL 7021
marble grey	RAL 7047
felt grey	RAL 7037
limestone	RAL 070 70 20

SOUND ABSORPTION COEFFICIENTS

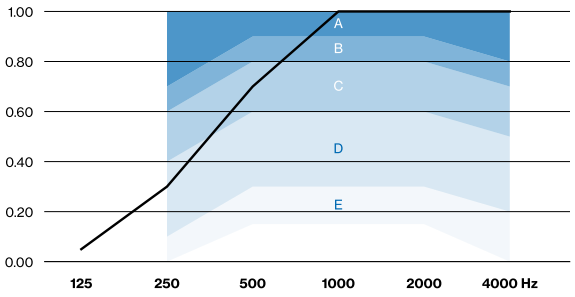

TASK acoustic surface

Acoustic data
calculations based on
TASK ACOUSTIC 1200 half square:
cavity 3cm

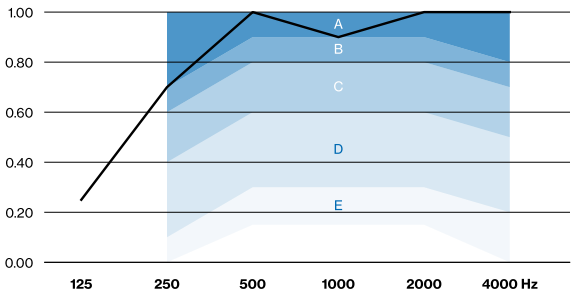

TASK acoustic suspended

Acoustic data
calculations based on
TASK ACOUSTIC 1200 half square:
cavity 20cm