
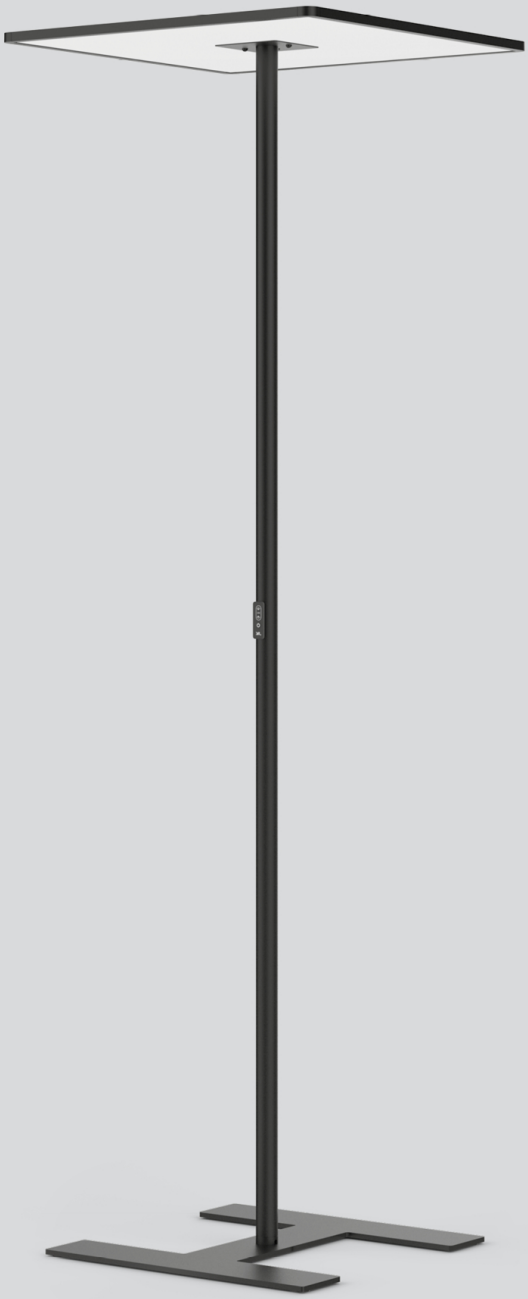


## Quickinfo

3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
UGR ≤ 10
fino a ↓ 2.420 lm / ↑ 10.700 lm
fino a 143 lm/W
L90 / 50000 h
DIM touch sul palo, sensore
ESSENTIAL autonomo
Microprismatic
IP20

### Types




### Colours

### Distribuzione della luce

# **TASK** square

free standing

EN Free standing luminaire with square luminaire head made of aluminium and rounded edges; ultra low-profile design (only 15 mm); steel round downpipe; pedestal with recess for table base; surface powder coated; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; switch installed in the downpipe; incl. connection cable (3m) with safety plug


IT Piantana di alluminio con testata quadrata e bordi arrotondati; forma ultrapiatta (solo 15 mm); stelo di acciaio rotondo; piedistallo con apertura per piede tavolo; verniciatura a polvere; distribuzione della luce diretta con sistema LGP-Body (Light Guiding Prism); luce convogliata lateralmente e direzionata in basso tramite incisione laser; percentuale indiretta con piastre a flusso luminoso potenziato e massima illuminazione del soffitto; illuminazione assolutamente omogenea; LED ad efficienza energetica con elevata resa cromatica; interruttore integrato nello stelo; incl. cavo di collegamento (3 m) con spina Schuko



suitable for fourfold workstation



lighting control by touch DIM on pole



CRI ≥ 98 XPECTRUM (optional)




## **TASK** square free standing


CRI ≥ 90 | UGR ≤ 10 | cd/m² ≤ 1500 | 220-240 V | X-PERT | X-PERT | presence | brightness

**DIRECT / INDIRECT POWER** CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 92.0 W | 3000 K | ↧2280/↥10000 lm | 133 lm/W | 059-293201 Z |
| | 4000 K | ↧2420/↥10700 lm | 143 lm/W | 059-293211 Z |




## Planning Information

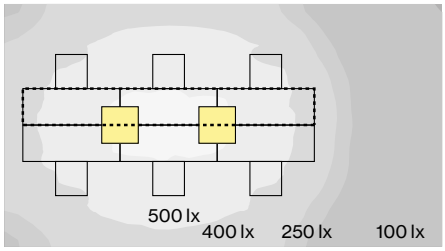




**TASK** square free standing
92 W, 4000 K, direct / indirect power

**ROOM VALUES**

| | |
|---|---|
| Room dimensions | 7.2 × 4 × 2.8 m |
| Reflection factor | 0.7 \| 0.5 \| 0.2 |
| Maintenance factor | 0.8 |

**CALCULATION SURFACE**

| | |
|---|---|
| Surface dimensions | 4.8 × 0.6 m |
| Surface height | 0.75 m |
| Average illuminance ($E_m$) | > 500 lx |

**GLARE EVALUATION**

Table Classification X=4H | Y=8H | S=0.25H

| | |
|---|---|
| UGR transversal | ≤ 19 |
| UGR axial | ≤ 19 |

65° ≤ 3000 cd/m²

**Order options**

| CONTROL | |
|---|---|
| touch DIM on pole | 5 |
| stand alone ESSENTIAL sensor | 7 |

| COLOUR | |
|---|---|
| white aluminium RAL 9006 | 6 |
| pure white RAL 9010 | 7 |
| jet black RAL 9005 | 8 |
| special colours | X |

# Office MyHammer

Germania

**Architetto**
designfunktion
Gesellschaft für
moderne Einrichtung
Berlin mbH

**Fotografo**
Werner Huthmacher



**Prodotti utilizzati**



**TASK square free standing**

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com



