
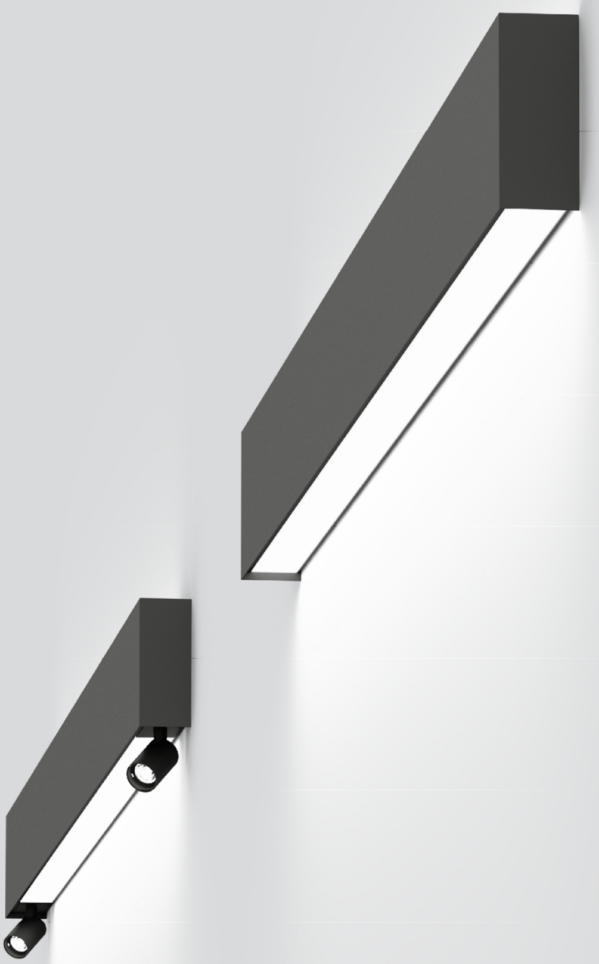


Quickinfo

3000 K, 4000 K, tunable white
2700 - 5000 K
CRI ≥ 90, CRI ≥ 97 / 3 SDCM (initial MacAdam)
fino a ↓ 4.020 lm / ↑ 4.780 lm
fino a 125 lm/W
L85 / 50000 h, L90 / 100000 h, L95 / 50000 h
DALI-2, DALI-2 / DIM interruttore, non DIM, non DIM / Interruttore ON|OFF
Opal, Opal / Asymmetric
IP20

Types



Colours

Distribuzione della luce


LINEA

EN Luminaire housing and front cover from extruded aluminium profile, angular version; no visible screws; surface powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; opal cover for uniform illumination; or with specially computed, asymmetrical lens for homogeneous lighting intensity (installation optionally for floor or ceiling illumination); energy-efficient LEDs with very good colour rendering; optionally JUST 26 spotlight module can be installed; optionally with switch for the JUST 26 spotlight modules

IT Corpo illuminante e copertura frontale in profilo di alluminio estruso, modello squadrato; nessuna vite visibile; verniciatura a polvere; montaggio a parete; distribuzione diretta/indiretta equilibrata per una luminosità omogenea del soffitto o parete; diffusore opale per un'illuminazione omogenea; o con lente asimmetrica appositamente tarata per livelli di illuminazione omogenei (montaggio per l'illum. pavimento o soffitto a scelta); LED ad efficienza energetica con elevata resa cromatica; inserto faretto JUST 26 montato in opzione; in opzione con interruttore per inserto a faretto JUST 26




system solution



CRI ≥ 98
XPECTRUM
(optional)



LINEA wall



OPAL / ASYMMETRIC CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W	310 mm	3000 K	↧428/↥509 lm	105 lm/W	0 5 8 - 6 1 7 1 5 ◆ ◪ A A
		4000 K	↧472/↥562 lm	116 lm/W	0 5 8 - 6 1 7 1 6 ◆ ◪ A A
17.6 W	610 mm	3000 K	↧881/↥1050 lm	110 lm/W	0 5 8 - 6 1 7 2 5 ◆ ◪ A A
		4000 K	↧972/↥1160 lm	121 lm/W	0 5 8 - 6 1 7 2 6 ◆ ◪ A A
20.1 W	610 mm	tunable w.	↧1000/↥1190 lm	109 lm/W	0 5 8 - 6 1 7 2 D 3 ◪ A A
34.0 W	1210 mm	3000 K	↧1760/↥2090 lm	113 lm/W	0 5 8 - 6 1 7 4 5 ◆ ◪ A A
		4000 K	↧1940/↥2310 lm	125 lm/W	0 5 8 - 6 1 7 4 6 ◆ ◪ A A
37.0 W	1210 mm	tunable w.	↧2010/↥2390 lm	119 lm/W	0 5 8 - 6 1 7 4 D 3 ◪ A A
68.0 W	2410 mm	3000 K	↧3520/↥4190 lm	113 lm/W	0 5 8 - 6 1 7 8 5 ◆ ◪ A A
		4000 K	↧3890/↥4620 lm	125 lm/W	0 5 8 - 6 1 7 8 6 ◆ ◪ A A
71.0 W	2410 mm	tunable w.	↧4020/↥4780 lm	124 lm/W	0 5 8 - 6 1 7 8 D 3 ◪ A A

OPAL / OPAL CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W	310 mm	3000 K	↧428/↥428 lm	96 lm/W	0 5 8 - 6 1 7 1 5 ◆ ◪ A H
		4000 K	↧472/↥472 lm	106 lm/W	0 5 8 - 6 1 7 1 6 ◆ ◪ A H
17.6 W	610 mm	3000 K	↧881/↥881 lm	100 lm/W	0 5 8 - 6 1 7 2 5 ◆ ◪ A H
		4000 K	↧972/↥972 lm	110 lm/W	0 5 8 - 6 1 7 2 6 ◆ ◪ A H
20.1 W	610 mm	tunable w.	↧1000/↥1000 lm	100 lm/W	0 5 8 - 6 1 7 2 D 3 ◪ A H
34.0 W	1210 mm	3000 K	↧1760/↥1760 lm	104 lm/W	0 5 8 - 6 1 7 4 5 ◆ ◪ A H
		4000 K	↧1940/↥1940 lm	114 lm/W	0 5 8 - 6 1 7 4 6 ◆ ◪ A H
37.0 W	1210 mm	tunable w.	↧2010/↥2010 lm	109 lm/W	0 5 8 - 6 1 7 4 D 3 ◪ A H
68.0 W	2410 mm	3000 K	↧3520/↥3520 lm	104 lm/W	0 5 8 - 6 1 7 8 5 ◆ ◪ A H
		4000 K	↧3890/↥3890 lm	114 lm/W	0 5 8 - 6 1 7 8 6 ◆ ◪ A H
71.0 W	2410 mm	tunable w.	↧4020/↥4020 lm	113 lm/W	0 5 8 - 6 1 7 8 D 3 ◪ A H


Order options

CONTROL ◆		COLOUR ◪	
non DIM	1	pure white RAL 9010	7
DALI-2	3	jet black RAL 9005	8



LINEA 1 spotlight wall

TUNABLE WHITE | CRI ≥ 90 | 220-240 V | 1 ADDR. | X-PERT | X-PERT



OPAL / OPAL | 1 SPOTLIGHT 23°-30°, CRI ≥ 90


SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.6 W	710 mm	3000 K	↧873/↥873 lm	99 lm/W	0 5 8 - 6 1 7 2 5 ↕1 ◪ ⊼ H
		4000 K	↧963/↥963 lm	109 lm/W	0 5 8 - 6 1 7 2 6 ↕1 ◪ ⊼ H
20.1 W	710 mm	tunable w.	↧1000/↥1000 lm	100 lm/W	0 5 8 - 6 1 7 2 D ↕2 ◪ ⊼ H
34.0 W	1310 mm	3000 K	↧1760/↥1720 lm	102 lm/W	0 5 8 - 6 1 7 4 5 ↕1 ◪ ⊼ H
		4000 K	↧1940/↥1900 lm	113 lm/W	0 5 8 - 6 1 7 4 6 ↕1 ◪ ⊼ H
37.0 W	1310 mm	tunable w.	↧2010/↥2010 lm	109 lm/W	0 5 8 - 6 1 7 4 D ↕2 ◪ ⊼ H
68.0 W	2510 mm	3000 K	↧3490/↥3490 lm	103 lm/W	0 5 8 - 6 1 7 8 5 ↕1 ◪ ⊼ H
		4000 K	↧3850/↥3850 lm	113 lm/W	0 5 8 - 6 1 7 8 6 ↕1 ◪ ⊼ H
71.0 W	2510 mm	tunable w.	↧4020/↥4020 lm	113 lm/W	0 5 8 - 6 1 7 8 D ↕2 ◪ ⊼ H

spotlight 1 x 2,6 W / 159 lm only with 3000 K; ON|OFF switch or DIM switch only controls the spotlight



LINEA 2 spotlights wall

TUNABLE WHITE | CRI ≥ 90 | 220-240 V | 1 ADDR. | X-PERT | X-PERT



OPAL / OPAL | 2 SPOTLIGHTS 23°-30°, CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	1410 mm	3000 K	↧1760/↥1720 lm	102 lm/W	0 5 8 - 6 1 7 4 5 ↕1 ◪ D H
		4000 K	↧1940/↥1900 lm	113 lm/W	0 5 8 - 6 1 7 4 6 ↕1 ◪ D H
37.0 W	1410 mm	tunable w.	↧2010/↥2010 lm	109 lm/W	0 5 8 - 6 1 7 4 D ↕2 ◪ D H
68.0 W	2610 mm	3000 K	↧3490/↥3490 lm	103 lm/W	0 5 8 - 6 1 7 8 5 ↕1 ◪ D H
		4000 K	↧3850/↥3850 lm	113 lm/W	0 5 8 - 6 1 7 8 6 ↕1 ◪ D H
71.0 W	2610 mm	tunable w.	↧4020/↥4020 lm	113 lm/W	0 5 8 - 6 1 7 8 D ↕2 ◪ D H

spotlights 2 x 2,6 W / 159 lm only with 3000K; ON|OFF switch or DIM switch only controls the spotlights

Order options

CONTROL ↕1		CONTROL ↕2		COLOUR ◪		MOUNTING ⊼	
non DIM / ON|OFF switch	2	DALI-2	3	pure white RAL 9010	7	spotlight left	B
DALI-2	3	DALI-2 / DIM switch	4	jet black RAL 9005	8	spotlight right	C
DALI-2 / DIM switch	4						


SNS Headquarters, Moscow

Russia

Architetto
Fedor Raschevsky, Peter Kholkovsky

Lighting Design
Sergey Ananiev


Fotografo
Light&Design

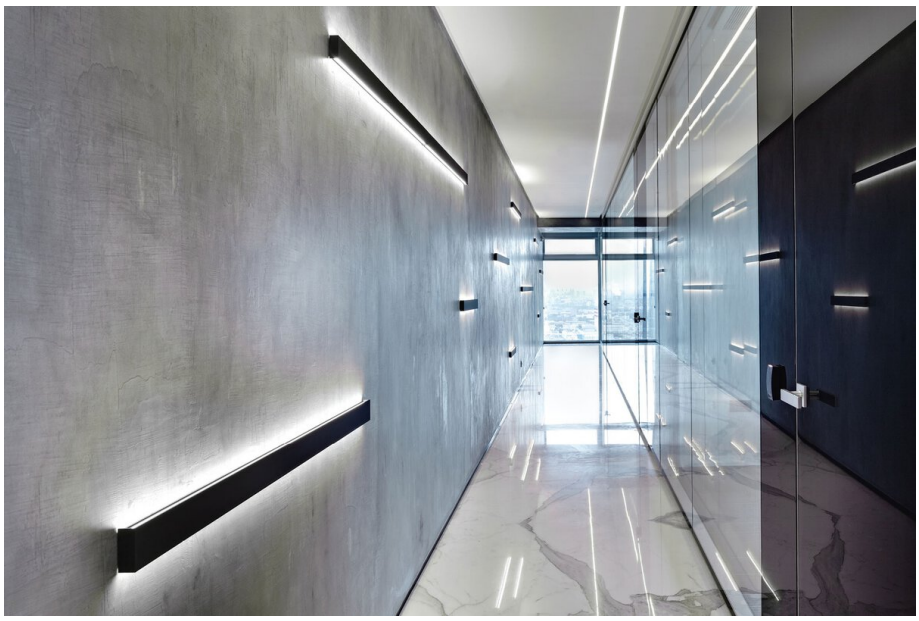

Prodotti utilizzati



LINEA



MINIMAL 100 trimless system



LINEA system

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com




SNS
ГРУППА КОМПАНИЙ
SNS