




## VARO 80 / 110

<sup>EN</sup> Track spotlight in die-cast aluminium, available in 2 different sizes; surface powder coated; spotlight head 355° rotatable and 90° tiltable; converter installed in aluminium spotlight housing; high quality reflector with spherical facet finish; precise radiation characteristics with different beam angles; installed and exchanged without tools; optical attachments as accessories; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; adapter for toolless insertion or movement on a variety of 3-phase power tracks

▮ Faretto in pressofusione di alluminio per binario elettrificato, due misure; verniciatura a polvere; testata girevole 355° e orient. 90°; converter integrato nel telaio di alluminio del faretto; riflettore di alta qualità con ottica a sfaccettature sferiche; curva fotometrica precisa con diversi angoli di emissione; montaggio e smontaggio senza utensili; unità ottiche come accessori; con tecnologia COB (Chip on Board) per la massima efficienza; assenza di ombre multiple; LED ad efficienza energetica con elevata resa cromatica; adattatore per installazione senza utensili o scorrimento in vari binari trifase

### Types



### Distribuzione della luce



355° rotatable,  
90° tiltable



CRI ≥ 95 2  
SDCM  
(optional)




### VARO 80 track



#### SPOT 17°, CRI ≥ 90, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
28.8 W	3000 K	2520 lm	88 lm/W	0 8 0 - 6 2 1 0 5 1 <input checked="" type="checkbox"/> S
	4000 K	2710 lm	94 lm/W	0 8 0 - 6 2 1 0 6 1 <input checked="" type="checkbox"/> S



#### MEDIUM 28°, CRI ≥ 90, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
28.8 W	3000 K	2560 lm	89 lm/W	0 8 0 - 6 2 1 0 5 1 <input checked="" type="checkbox"/> M
	4000 K	2750 lm	95 lm/W	0 8 0 - 6 2 1 0 6 1 <input checked="" type="checkbox"/> M

#### FLOOD 38°, CRI ≥ 90, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
28.8 W	3000 K	2520 lm	88 lm/W	0 8 0 - 6 2 1 0 5 1 <input checked="" type="checkbox"/> F
	4000 K	2700 lm	94 lm/W	0 8 0 - 6 2 1 0 6 1 <input checked="" type="checkbox"/> F




### VARO 110 track



#### SPOT 14°, CRI ≥ 90, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
41.0 W	3000 K	3740 lm	91 lm/W	0 8 0 - 6 1 2 0 5 1 <input checked="" type="checkbox"/> S
	4000 K	3950 lm	96 lm/W	0 8 0 - 6 1 2 0 6 1 <input checked="" type="checkbox"/> S



#### MEDIUM 24°, CRI ≥ 90, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
41.0 W	3000 K	3790 lm	92 lm/W	0 8 0 - 6 1 2 0 5 1 <input checked="" type="checkbox"/> M
	4000 K	4010 lm	98 lm/W	0 8 0 - 6 1 2 0 6 1 <input checked="" type="checkbox"/> M

#### FLOOD 33°, CRI ≥ 90, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
41.0 W	3000 K	3830 lm	93 lm/W	0 8 0 - 6 1 2 0 5 1 <input checked="" type="checkbox"/> F
	4000 K	4050 lm	99 lm/W	0 8 0 - 6 1 2 0 6 1 <input checked="" type="checkbox"/> F

## Optical accessories (optional)

### SNOOT WITH HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
for VARO 110	106-9	0 0 6 - 9 3 1 3 0
for VARO 80	83-9	0 0 6 - 9 3 1 2 0

## Order options

COLOUR	
traffic white RAL 9016	<input checked="" type="checkbox"/> 7
jet black RAL 9005	<input checked="" type="checkbox"/> 8

# Kastner & Öhler AG Kaufhaus Tyrol, Innsbruck

Austria

## Architetto

DIOMA AG / WHIR3 /  
K&Ö Bauabteilung

## Lighting Design

VEDDER.LICHTMANAGEMENT

## Fotografo

Jens Pfisterer



## Prodotti utilizzati




**VARO 80 / 110**



**TWIST 100 1 lamp  
recessed**





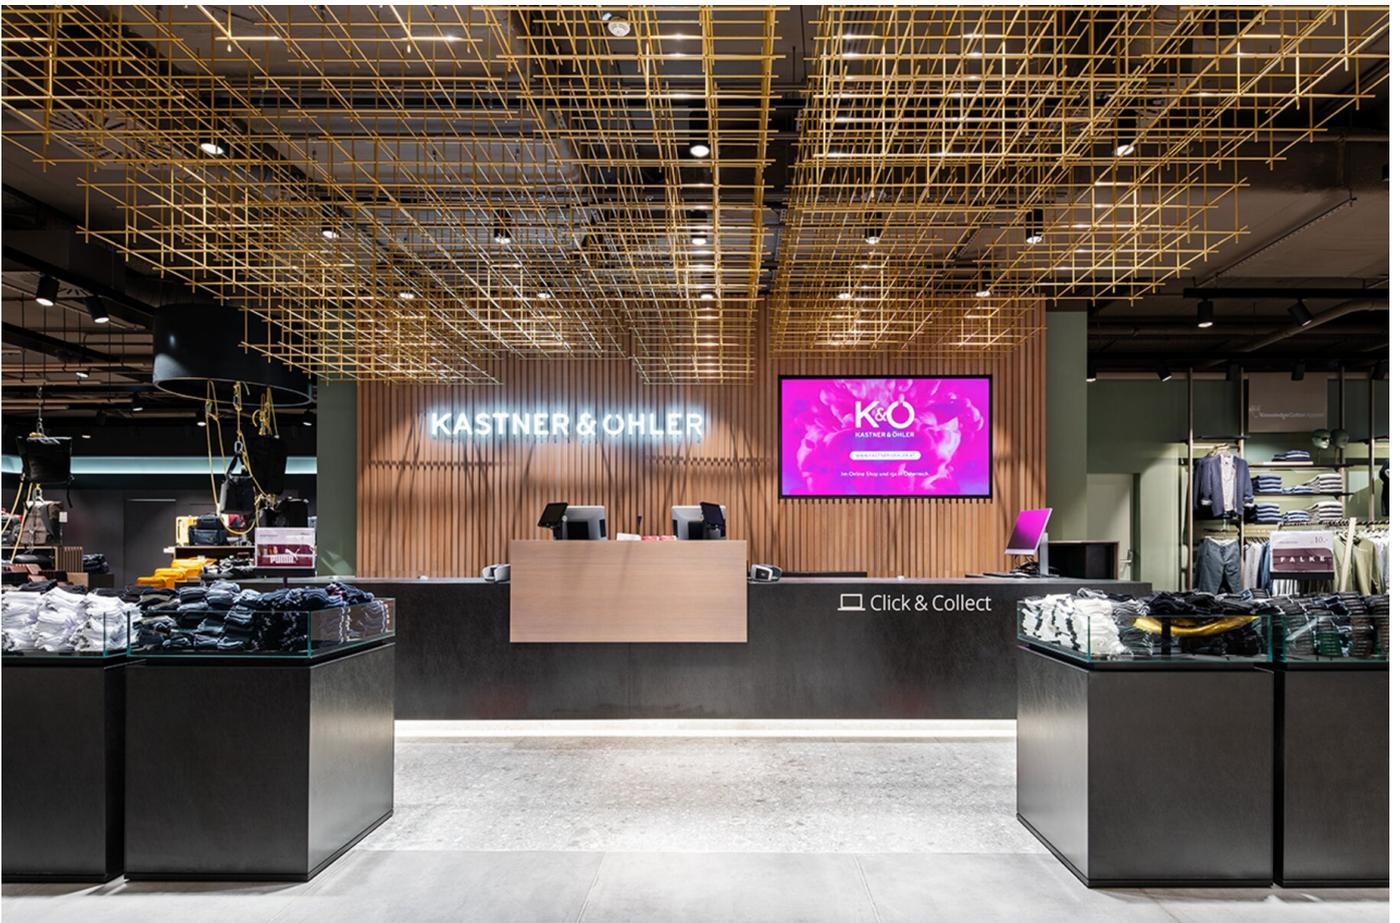




# MUCA - Museum of Urban and Contemporary Art, Munich

Germania

## Fotografo

Dominik Münich

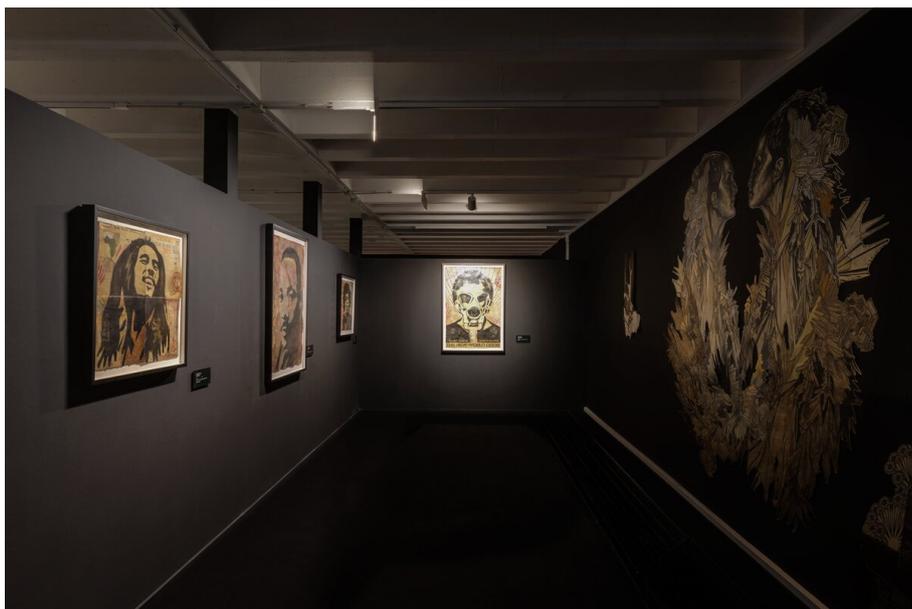

## Prodotti utilizzati



**VARO 80 / 110**







