


Quickinfo

3000 K, 4000 K
CRI ≥ 95 / 2 SDCM (initial MacAdam)
fino a 17 lm/W
L85 / 50000 h
DALI-2, DIM POTI
IP20

Types



Colours



PABLO shutter / iris / gobo

EN Track light made of die-cast aluminium; surface powder coated; 360° rotatable and 310° tiltable; converter in spotlight housing; COB (Chip on Board) technology - maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; contour spotlight for precise rectangular or round shape; easy adjustment by 4 shading elements or by iris-shaped shade made of stainless steel; incl. high quality bi-convex glass lens; sharp object focusing through adjustable lens; focus using rubber adjustment ring on spotlight head; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation optionally without tools by means of knurled screw or set screw (screwdriver required); point outlet, either in surface mounted housing or recessed housing, available as an accessory

IT Faretto da binario elettrificato in alluminio pressofuso; verniciatura a polvere; girevole 360° e orientabile 310°; converter nel telaio del faretto; tecnologia COB (Chip on Board) - massima efficienza; assenza di ombre multiple; LED ad efficienza energetica con elevata resa cromatica; faretto sagomatore per forma esattamente squadrata o rotonda; regolazione semplice con 4 shutter oppure otturatori di acciaio inox; incl. lente biconvessa di qualità in vetro; focalizzazione nitida degli oggetti con lente regolabile; messa a fuoco con anello di regolazione gommato sulla testata del faretto; adattatore per installazione senza utensili o scorrimento in vari binari trifase; fissaggio adattatore a scelta senza attrezzi mediante vite a testa zigrinata o vite di serraggio (cacciavite necessario); allacciamento singolo con armatura a plafone o da incasso, disponibile come accessorio



compatible with MOVE IT PRO 45



DiiA® standards 251, 252, 253



360° rotatable, 310° tiltable



shutter / iris / gobo




DIM POTI / rotation lock



PABLO shutter track

31°, CRI ≥ 95

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.0 W	3000 K	201 lm	14 lm/W	180-53ơ00◪
	4000 K	220 lm	16 lm/W	180-53ơ01◪
23.0 W	3000 K	298 lm	13 lm/W	180-53ơ10◪
	4000 K	327 lm	14 lm/W	180-53ơ11◪






PABLO iris track


32°, CRI ≥ 95

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.0 W	3000 K	210 lm	15 lm/W	180-54ơ00◪
	4000 K	231 lm	17 lm/W	180-54ơ01◪
23.0 W	3000 K	312 lm	14 lm/W	180-54ơ10◪
	4000 K	343 lm	15 lm/W	180-54ơ11◪




Planning Information

PABLO shutter

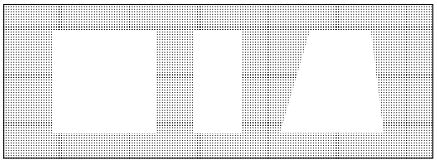


possible shapes of illumination

PABLO iris

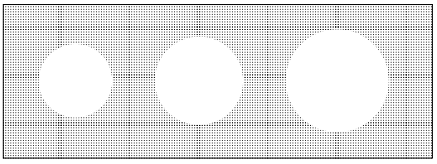

possible shapes of illumination

Illumination size



A (mm)	H (mm)	ø (mm)
1000	396	560
2000	792	1120
3000	1188	1680

Order options

MOUNTING	ơ	CONTROL	◆	COLOUR	◪
set screw (tool required)	1	DALI-2	3	traffic white RAL 9016	7
tool-free fixation	2	DIM POTI	8	jet black RAL 9005	8

Mounting accessories

RECESSED HOUSING / POINT OUTLET ceiling thickness, 1-30 mm

Ø·H (mm)	ORDER CODE
151·60	186-07227

SURFACE HOUSING / POINT OUTLET

Ø·H (mm)	ORDER CODE
120·32	186-07228

Order options

COLOUR	
traffic white RAL 9016	7
jet black RAL 9005	8