




Quickinfo

3000 K, 4000 K
CRI ≥ 80 / 3 SDCM (initial MacAdam)
UGR ≤ 19
fino a 2.130 lm/m
fino a 140 lm/W
L85 / 50000 h
DALI-2
Jut-Out, Microprismatic, Opal
IP40, back IP20

Types



Colours

Distribuzione della luce

LENO

semi-recessed

EN Low profile recessed mounted luminaire, 15 mm visible height; suitable for wall or ceiling mounting; suitable for installation in primed or exposed concrete, in plasterboard constructions and in plastered walls or ceilings; surface powder coated; fall-safe light inset made of extruded aluminium profile, can be inserted in the canal without tools by magnetic holders; side coupled light, directed downwards by LGP body (Light Guiding Prism) and highly efficient reflector; homogeneously illuminated, satinised (flush or jut-out) or microprismatic PMMA cover; energy-efficient LEDs with very good colour rendering


IT Apparecchio da incasso ultrapiatto da 15 mm di altezza visibile; per montaggio a parete o soffitto; per montaggio in cemento a vista o stuccato, in costruzioni di cartongesso e in pareti o soffitti intonacati; verniciatura a polvere; inserto luce anti-caduta in profilo di allumino estruso, fissaggio nel canale con magnete senza bisogno di utensili; luce convogliata lateralmente e direzionata in basso con sistema LGP-Body (Light Guiding Prism) e riflettore ad alta efficienza; diffusore satinato (a filo o sporgente) o con struttura a microprismi a illuminazione omogenea in PMMA; LED ad efficienza energetica con elevata resa cromatica



DiiA® standards 251, 252, 253



system solution




microprismatic UGR ≤ 19



quick installation

LENO semi-recessed

CRI ≥ 80 | UGR ≤ 19 | 220-240 V | DALI 1 ADDR. | IP20 IP40 | X-PERT



MICROPRISMATIC CRI ≥ 80, DALI-2

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	618 mm	3000 K	1160 lm	117 lm/W	0 5 1 - 8 5 1 2 5 3 G
		4000 K	1230 lm	124 lm/W	0 5 1 - 8 5 1 2 6 3 G
19.1 W	1226 mm	3000 K	2320 lm	121 lm/W	0 5 1 - 8 5 1 4 5 3 G
		4000 K	2450 lm	128 lm/W	0 5 1 - 8 5 1 4 6 3 G
28.6 W	1835 mm	3000 K	3480 lm	122 lm/W	0 5 1 - 8 5 1 6 5 3 G
		4000 K	3680 lm	129 lm/W	0 5 1 - 8 5 1 6 6 3 G
37.0 W	2443 mm	3000 K	4630 lm	125 lm/W	0 5 1 - 8 5 1 8 5 3 G
		4000 K	4910 lm	133 lm/W	0 5 1 - 8 5 1 8 6 3 G

OPAL CRI ≥ 80, DALI-2

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	618 mm	3000 K	1220 lm	123 lm/W	0 5 1 - 8 5 1 2 5 3 H
		4000 K	1300 lm	131 lm/W	0 5 1 - 8 5 1 2 6 3 H
19.1 W	1226 mm	3000 K	2450 lm	128 lm/W	0 5 1 - 8 5 1 4 5 3 H
		4000 K	2590 lm	136 lm/W	0 5 1 - 8 5 1 4 6 3 H
28.6 W	1835 mm	3000 K	3670 lm	128 lm/W	0 5 1 - 8 5 1 6 5 3 H
		4000 K	3890 lm	136 lm/W	0 5 1 - 8 5 1 6 6 3 H
37.0 W	2443 mm	3000 K	4900 lm	132 lm/W	0 5 1 - 8 5 1 8 5 3 H
		4000 K	5190 lm	140 lm/W	0 5 1 - 8 5 1 8 6 3 H


OPAL JUT-OUT CRI ≥ 80, DALI-2


SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	618 mm	3000 K	1170 lm	118 lm/W	0 5 1 - 8 5 1 2 5 3 J
		4000 K	1240 lm	125 lm/W	0 5 1 - 8 5 1 2 6 3 J
19.1 W	1226 mm	3000 K	2350 lm	123 lm/W	0 5 1 - 8 5 1 4 5 3 J
		4000 K	2490 lm	130 lm/W	0 5 1 - 8 5 1 4 6 3 J
28.6 W	1835 mm	3000 K	3520 lm	123 lm/W	0 5 1 - 8 5 1 6 5 3 J
		4000 K	3730 lm	130 lm/W	0 5 1 - 8 5 1 6 6 3 J
37.0 W	2443 mm	3000 K	4700 lm	127 lm/W	0 5 1 - 8 5 1 8 5 3 J
		4000 K	4970 lm	134 lm/W	0 5 1 - 8 5 1 8 6 3 J

Order options

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8

Planning Information

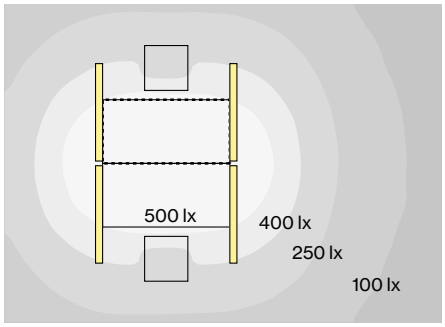

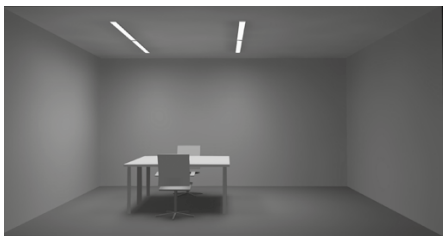

LENO semi-recessed, 19.1 W, 4000 K

ROOM VALUES

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 | 0.5 | 0.2
Maintenance factor	0.8

CALCULATION SURFACE

Surface dimensions	1.6 × 0.8
Surface height	0.75
Average illuminance (E_m)	> 500 lx
Uniformity (U_0)	> 0.6

GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H	
UGR transversal	≤ 19
UGR axial	≤ 19

Mounting tools accessories

DISMOUNTING TOOL

TYPE	ORDER CODE
vacuum cup	0 8 6 - 3 0 0 0 0