




## Quickinfo

2700 K, 3000 K  
 CRI  $\geq$  90 / 2 SDCM (initial MacAdam), 3 SDCM (initial MacAdam)  
 fino a 95 lm/W  
 L90 / 50000 h  
 Casambi, DALI-2, non DIM  
 IP20

## Types

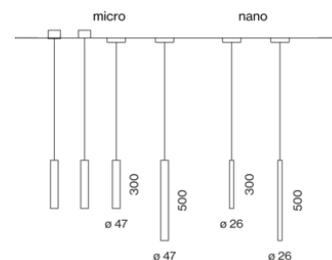

## Colore



## Rosone




## Distribuzione della luce




## TULA suspended

<sup>EN</sup> Decorative suspended luminaire in aluminium; surface polished chrome or powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; good glare reduction due to recessed light point plane; incl. high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy, either recessed or surface mounted version; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory


<sup>IT</sup> Apparecchio a sospensione decorativo in alluminio; superficie lucida cromata, o verniciatura a polvere; sospeso con cavo a sospensione, incl. cavo di alimentazione (nero o bianco); accorciabile a piacere; ottima schermatura con superficie di emissione arretrata; incl. ottica lenticolare di qualità; con tecnologia COB (Chip on Board) per la massima efficienza; assenza di ombre multiple; LED ad efficienza energetica con elevata resa cromatica; rosone per cablaggio passante; converter inserito nel rosone, a scelta in variante da incasso o a plafone; anelli di montaggio a soffitto per posizionare la lampada in più punti dell'ambiente disponibili come accessori



free positioning  
by ring and  
hook



track version  
available




### TULA nano suspended



#### MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W, 18 Vf, 500 mA	2700 K	790 lm	89 lm/W	0 4 9 - 5 H 1 0 4 1 <input checked="" type="checkbox"/> M
	3000 K	816 lm	92 lm/W	0 4 9 - 5 H 1 0 5 1 <input checked="" type="checkbox"/> M



#### FLOOD 30°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W, 18 Vf, 500 mA	2700 K	762 lm	86 lm/W	0 4 9 - 5 H 1 0 4 1 <input checked="" type="checkbox"/> F
	3000 K	787 lm	89 lm/W	0 4 9 - 5 H 1 0 5 1 <input checked="" type="checkbox"/> F




### TULA micro suspended



#### MEDIUM 25°, CRI ≥ 90


FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W, 18 Vf, 500 mA	2700 K	648 lm	77 lm/W	0 4 9 - 5 H 1 5 4 1 <input checked="" type="checkbox"/> M
	3000 K	746 lm	88 lm/W	0 4 9 - 5 H 1 5 5 1 <input checked="" type="checkbox"/> M



#### FLOOD 44°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W, 18 Vf, 500 mA	2700 K	694 lm	82 lm/W	0 4 9 - 5 H 1 5 4 1 <input checked="" type="checkbox"/> F
	3000 K	798 lm	95 lm/W	0 4 9 - 5 H 1 5 5 1 <input checked="" type="checkbox"/> F


## Mounting accessories (required)



#### MOUNTING SET trimless for cable suspension for plasterboard ceilings

COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
traffic white	9-25 mm	75-48	0 0 5 - 3 5 1 1 0 1 7

excl. power supply



#### MOUNTING SET with trim for cable suspension for ceilings, 2-25 mm

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	77-49	0 0 5 - 3 5 2 1 0 1 7
jet black	77-49	0 0 5 - 3 5 2 1 0 1 8

excl. power supply

## Order options

HEIGHT	H	COLOUR	<input checked="" type="checkbox"/>	COLOUR	<input checked="" type="checkbox"/>
300 mm	5	special colours	X	traffic white RAL 9016	7
500 mm	7	chrome	4	jet black RAL 9005	8
		traffic white RAL 9016	7		
		jet black RAL 9005	8		

## Mounting accessories (optional)



### RING ceiling mounted


COLOUR	Ø-H (mm)	ORDER CODE
traffic white	50-88	0 5 0 - 0 5 1 0 2 1 7
jet black	50-88	0 5 0 - 0 5 1 0 2 1 8



### HOOK ceiling mounted

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	18-58	0 5 0 - 0 5 1 0 3 1 7
jet black	18-58	0 5 0 - 0 5 1 0 3 1 8

## Mounting tools accessories (optional)




### SPECIAL MOUNTING TOOL for ARY | MOVE IN 45 | NOBA trimless | TULA

Ø-H (mm)	ORDER CODE
100-107	0 6 3 - 8 9 1 2 1 1 0

necessary to install mounting housing trimless

## Electrical accessories (required)



### CANOPY for cable suspension 500 mA, 198-264 V AC, PC2


TYPE	EFFICIENCY	Ø-H (mm)	ORDER CODE
13 W   non DIM	η 84 %	115-29	0 0 5 - 2 6 0 2 1 1 <a href="#">▶</a>
10 W   DALI-2	η 85 %	115-29	0 0 5 - 2 6 0 2 1 3 <a href="#">▶</a>
10 W   Casambi	η 83 %	115-29	0 0 5 - 2 6 0 2 1 9 <a href="#">▶</a>

incl. power supply

### POWER SUPPLY 500 mA, 10 W, 198-264 V AC, PC2

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
non DIM	η 80 %	65-39-20	0 0 2 - 9 0 7 3 2
DALI-2	η 82 %	147-33-23	0 0 2 - 9 0 7 3 3

## Electrical accessories (optional)



### DIN RAIL POWER SUPPLY BASIC 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L-W-H (mm)	ORDER CODE
160 W   PC2	220-240 V AC	η 94 %	72-90-63	0 0 5 - 6 5 2 0 2 1 0

Lifetime >100.000h @ 120W, 45°C ambient temp., cascable max. 3 devices

### DIN RAIL LED DRIVER

TYPE	L-W-H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses / DT8 1 adress	36-88-59	0 0 5 - 6 1 2 1 0 3 0

200 -1050 mA settable const. current | 2×42W | 48V DC | U OUT 10-40V SELV

## Order options

HEIGHT	H	COLOUR	<input checked="" type="checkbox"/>	COLOUR	<input checked="" type="checkbox"/>
300 mm	5	<a href="#">special colours</a>	X	traffic white RAL 9016	7
500 mm	7	chrome	4	jet black RAL 9005	8
		traffic white RAL 9016	7		
		jet black RAL 9005	8		

### Optical accessories (optional)



**HONEYCOMB LOUVER** for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

COLOUR	Ø-H (mm)	ORDER CODE
jet black	42.3	0 0 7 - 1 9 6 5 1 8 8



**OVAL LENS** for BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42.3	0 0 7 - 1 9 6 5 8 8 0



**SOFT LENS** for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42.3	0 0 7 - 1 9 6 5 9 8 0



**WALLWASHER LENS** for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42.3	0 0 7 - 1 9 6 5 7 8 0

### Order options

HEIGHT	H	COLOUR	<input checked="" type="checkbox"/>	COLOUR	<input checked="" type="checkbox"/>
300 mm	5	<a href="#">special colours</a>	X	traffic white RAL 9016	7
500 mm	7	chrome	4	jet black RAL 9005	8
		traffic white RAL 9016	7		
		jet black RAL 9005	8		

# Private Residence, Denmark

Danimarca

**Architetto**  
LINK Architecture

**Lighting Design**  
anker & co


**Fotografo**  
Kris Dekeijser



## Prodotti utilizzati




**SPOTLINE MOVE IT  
25**



**MOVE IT 25 trimless  
system**



**TULA suspended  
system**

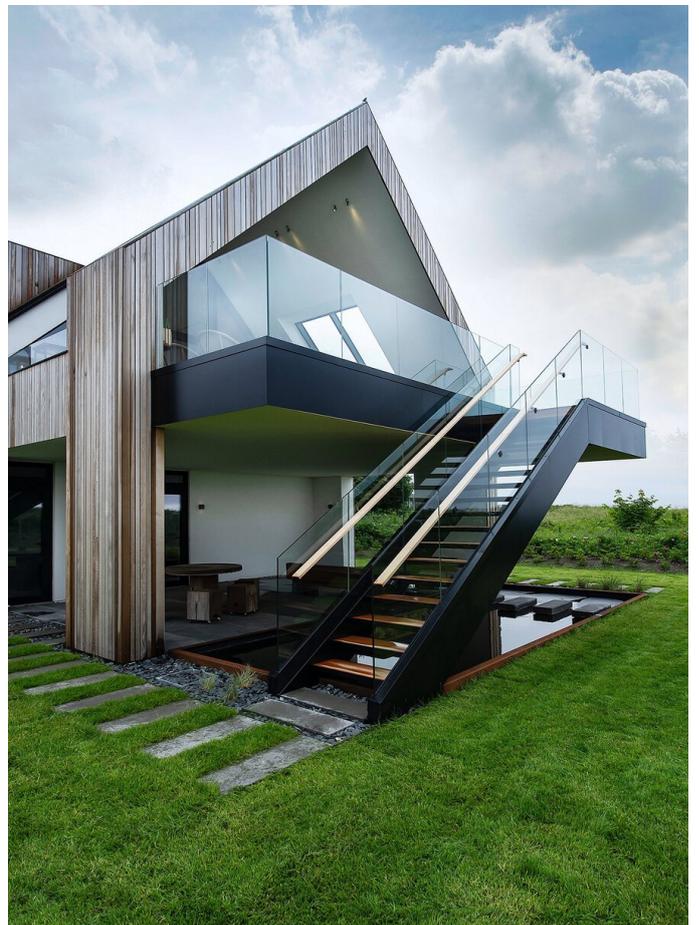



# Trippenhuis

Paesi Bassi

**Architetto**  
Arpalight

**Fotografo**  
Rene de Wit Max Hart  
Nibbrig




## Prodotti utilizzati




**SASSO 60 round  
semi-recessed**



**SASSO 60 round  
ceiling**



**BO 32 / 45 / 55 / 70  
intrack 1 | 2 | 3 lamps**



**MOVE IT 25 trimless  
system**



**TULA suspended**



