


Quickinfo

3000 K, 4000 K, tunable white
2700 - 6500 K
CRI ≥ 80, CRI ≥ 90 / 3 SDCM (initial MacAdam)
UGR ≤ 10, UGR ≤ 13, UGR ≤ 16
fino a ↓ 5.530 lm / ↑ 7.850 lm
fino a 7.460 lm/m
fino a 163 lm/W
L90 / 75000 h
Cover: Lens, Reflector
DALI-2, DALI-2 / DALI-2 ESSENTIAL sensor, DALI-2 D/I controllo separato
IP20

Types



Colours

Riflettore


Distribuzione della luce



DiiA® standards
251, 252, 253




DIN EN 12464-1
UGR ≤ 19



system solution



glare-free direct and 170° indirect illumination




CRI ≥ 98
XPECTRUM
(optional)

BETO

suspended

EN Luminaire housing from extruded aluminium profile, angular design; extremely slim design (only 42 x 42 mm); no visible screws; surface powder coated; pendant fitting with cable suspension; with integrated toolless suspension height adjustment; spring clip attachment to the luminaire; freely positionable; incl. feeder cable; extruded profile for improved thermal management; high gloss reflector with faceted design; direct / indirect light distribution; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination, optionally separately controllable; energy-efficient LEDs with very good colour rendering

IT Corpo illuminante in profilo di alluminio estruso, modello squadrato; forma estremamente sottile (solo 42 x 42 mm); nessuna vite visibile; verniciatura a polvere; sospeso con cavo a sospensione; altezza regolabile sull'apparecchio, senza utensili; fissaggio sull'apparecchio tramite clip a molla; libertà di posizionamento; incl. cavo di alimentazione; profilo di alluminio estruso per migliorare il bilancio termico; riflettore ad alta lucentezza con design sfaccettato; emissione diretta/indiretta; luce indiretta con chip dedicati e ottica lenticolare d'alta qualità, per una luminosità estensiva ed omogenea sul soffitto, a scelta con comandi separati; LED ad efficienza energetica con elevata resa cromatica




BETO suspended

TUNABLE WHITE | CRI ≥ 90 | UGR ≤ 10 | cd/m² ≤ 1500 | 220-240 V | 1-2 ADDR. | X-PERT | X-PERT | presence | brightness

DIRECT / INDIRECT 2700-6500K POWER CRI ≥ 90, DALI-2 D/I separately controllable

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
51.0 W	1857 mm	↧ 3000 K/ ↥tunable w.	↧3200/↥3050 lm	123 lm/W	074 - 62D604
		↧ 4000 K/ ↥tunable w.	↧3200/↥3050 lm	123 lm/W	074 - 62D614
88.0 W	3057 mm	↧ 3000 K/ ↥tunable w.	↧4810/↥6110 lm	124 lm/W	074 - 62D904
		↧ 4000 K/ ↥tunable w.	↧4810/↥6110 lm	124 lm/W	074 - 62D914



The data values for the luminous flux may differ for specific order options by -14%. Luminous flux value refers to reflector chrome. tunable white only INDIRECT

INDIRECT POWER

SYSTEM	LENGTH	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
54.0 W	3457 mm	3000 K	80	7840 lm	145 lm/W	074 - 62N95 ₁
			90	6840 lm	127 lm/W	074 - 62N90 ₁
		4000 K	80	8360 lm	155 lm/W	074 - 62N96 ₁
			90	6840 lm	127 lm/W	074 - 62N91 ₁
61.0 W	3457 mm	tunable w.	90	6880 lm	113 lm/W	074 - 62N9D ₁

DIRECT / INDIRECT POWER


SYSTEM	LENGTH	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
48.0 W	1857 mm	3000 K	80	↧3470/↥3440 lm	144 lm/W	074 - 624665
			90	↧3020/↥2970 lm	125 lm/W	074 - 624660
		4000 K	80	↧3690/↥3930 lm	159 lm/W	074 - 624666
			90	↧3020/↥3210 lm	130 lm/W	074 - 624661
51.0 W	1857 mm	tunable w.	90	↧3320/↥3120 lm	126 lm/W	074 - 62466D ₁
82.0 W	3057 mm	3000 K	80	↧5200/↥6890 lm	147 lm/W	074 - 624995
			90	↧4530/↥5940 lm	128 lm/W	074 - 624990
		4000 K	80	↧5530/↥7850 lm	163 lm/W	074 - 624996
			90	↧4530/↥6410 lm	133 lm/W	074 - 624991
87.0 W	3057 mm	tunable w.	90	↧4980/↥6240 lm	129 lm/W	074 - 62499D


The data values for the luminous flux may differ for specific order options by -14%. Luminous flux value refers to reflector chrome.

Order options

CONTROL		CONTROL	₁	COLOUR		REFLECTOR	
DALI-2	3	DALI-2	3	pure white RAL 9010	7	dark chrome	B
DALI-2 D/I separately controllable	4	DALI-2 / DALI-2 ESSENTIAL sensor	7	jet black RAL 9005	8	chrome	R
DALI-2 / DALI-2 ESSENTIAL sensor	7						

Planning Information

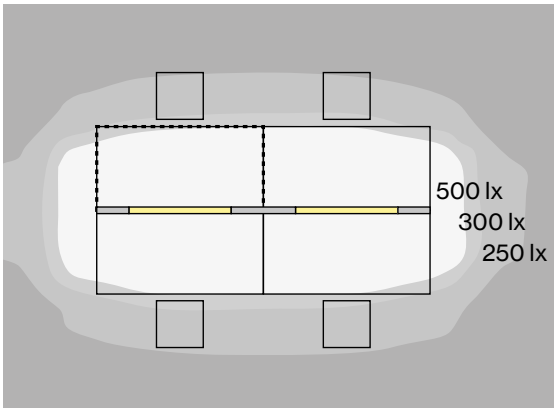

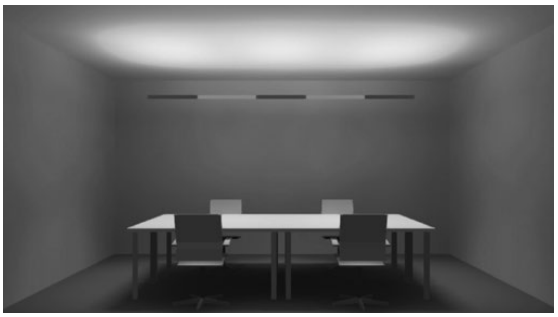

BETO suspended, 86 W, 4000 K direct / indirect power

ROOM VALUES

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 | 0.5 | 0.2
Maintenance factor	0.8
Mounting height	2.25 m

CALCULATION SURFACE ·····

Surface dimensions	1.6 × 0.8
Surface height	0.75
Average illuminance (E_m)	> 500 lx
Uniformity (U_0)	> 0.6

GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H

UGR transversal	≤ 19
UGR axial	≤ 19

65° < 1500 cd/m²


F+P Architekten, Vienna

Austria


Architetto
F+P Architekten

Lighting Design
Ing. Gerald Pummer,
Illuminazione

Fotografo
Kurt Kuball

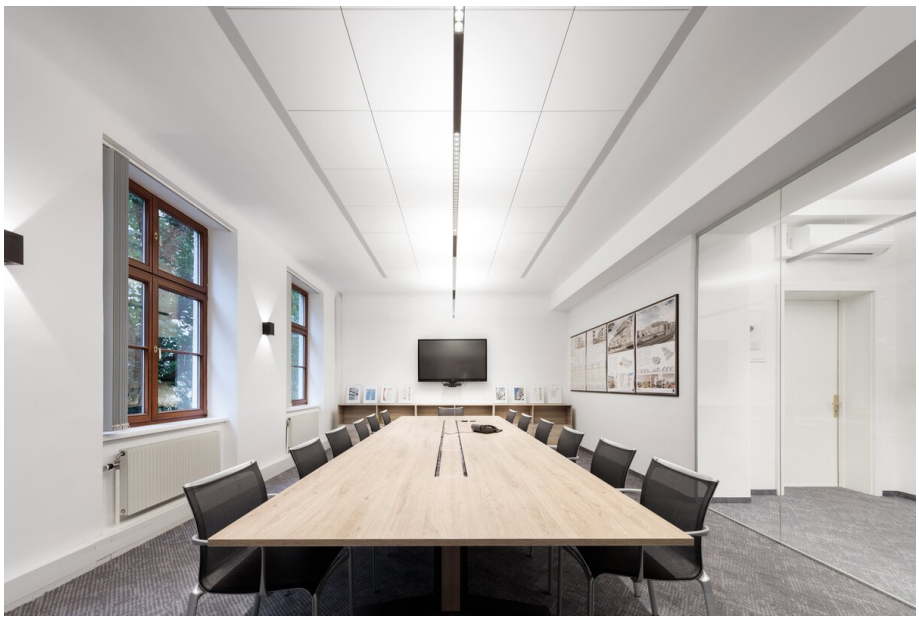

Prodotti utilizzati





SASSO 100 square ceiling




BETO ceiling / suspended system

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

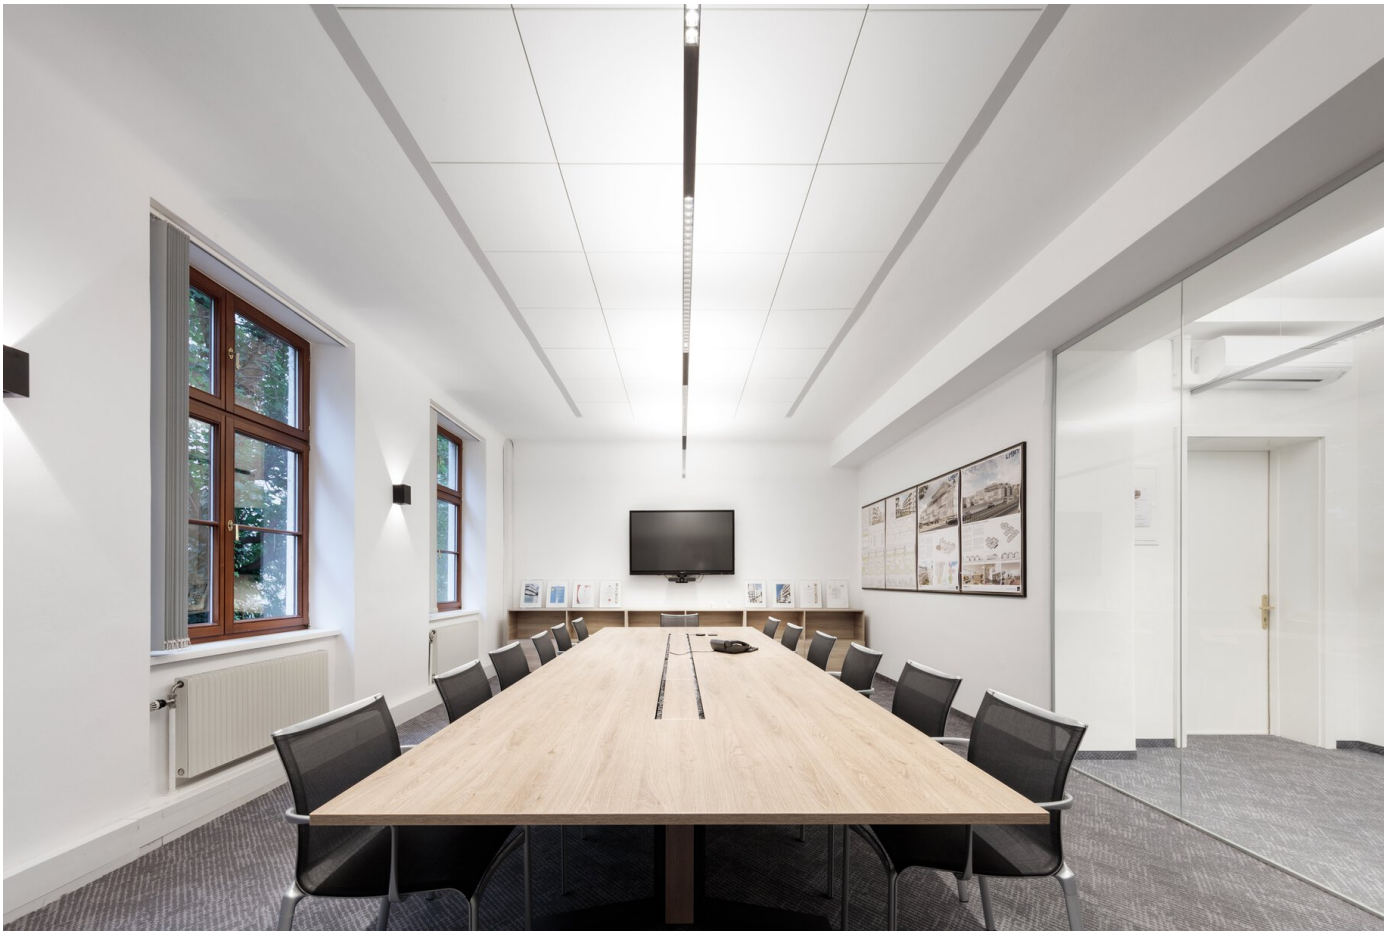

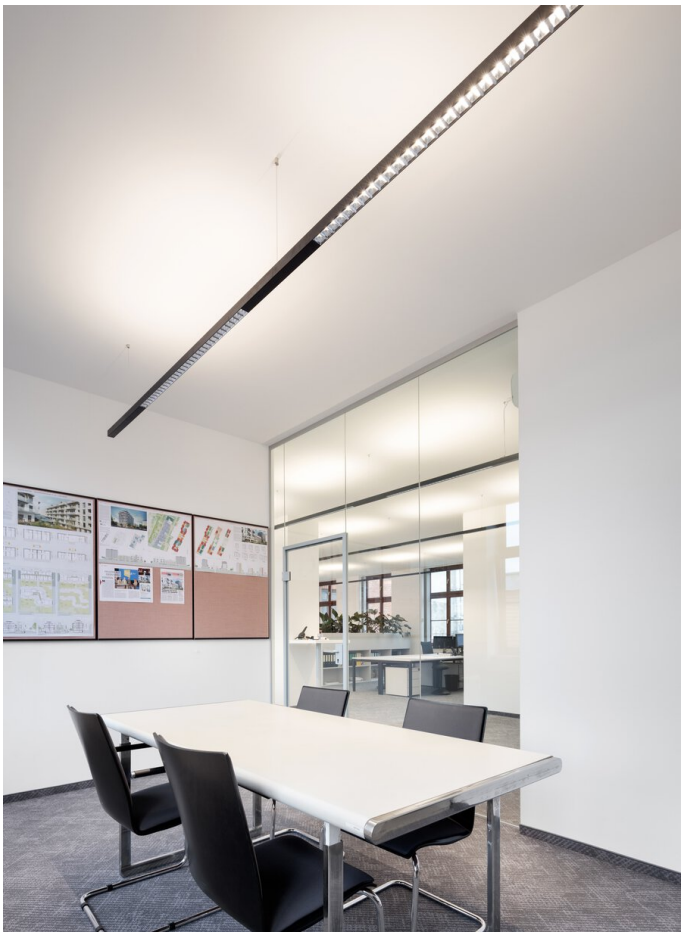

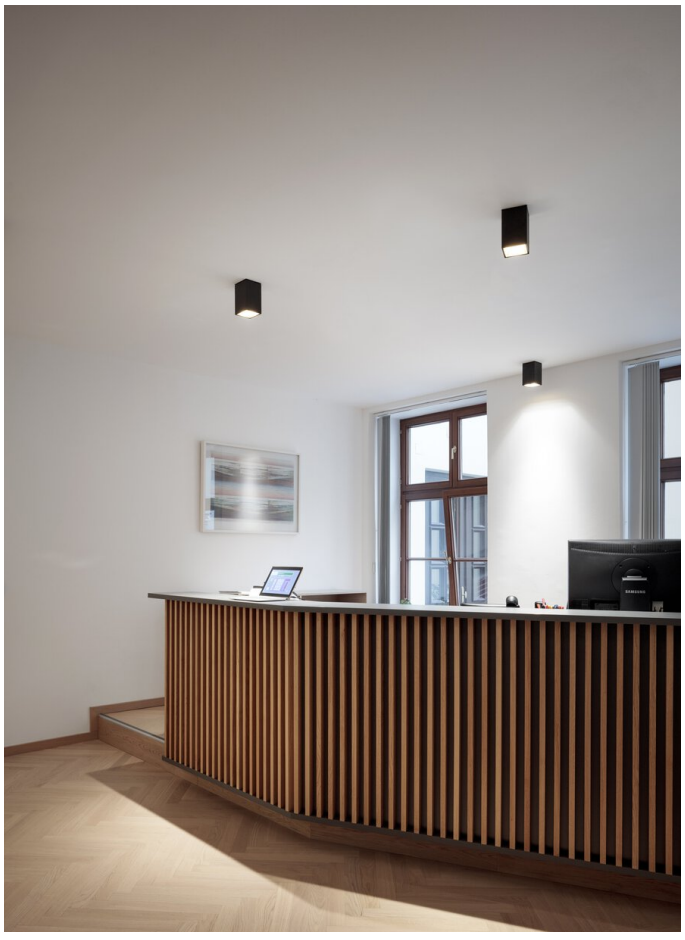




Granitlab Coworking

Austria

Architetto
GHT-Plan GmbH

Lighting Design
GHT-Plan GmbH, AREA
C.I. Design GmbH

Fotografo
Kurt Kuball

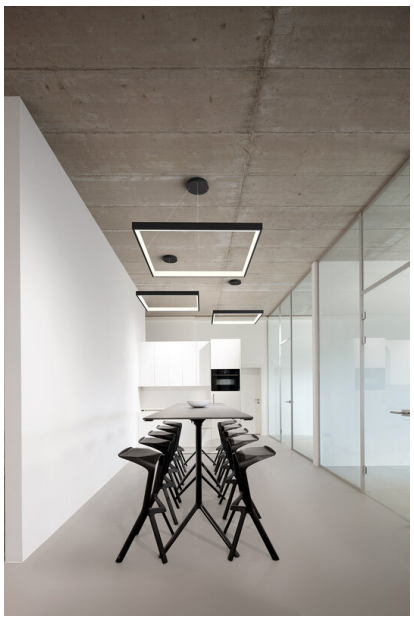

Prodotti utilizzati



BETO suspended



INO square suspended



UNICO Q1 / Q4 ceiling

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

