

## SETA

suspended


<sup>EN</sup> Luminaire housing from extruded aluminium profile, round design; extremely slim design (only  $\varnothing$  61 mm); no visible screws; surface polished chrome or powder coated; pendant fitting with cable suspension; with integrated toolless suspension height adjustment; spring clip attachment to the luminaire; freely positionable; incl. feeder cable; extruded profile for improved thermal management; high gloss reflector with faceted design; direct / indirect light distribution; indirect light component with integrated PCboards and high quality lens system for maximum, homogeneous ceiling illumination, optionally separately controllable; energy-efficient LEDs with very good colour rendering

<sup>IT</sup> Corpo illuminante in profilo di alluminio estruso, modello rotondo; forma estremamente sottile (solo  $\varnothing$  61mm); nessuna vite visibile; superficie lucida cromata, o verniciatura a polvere; sospeso con cavo a sospensione; altezza regolabile sull'apparecchio, senza utensili; fissaggio sull'apparecchio tramite clip a molla; libertà di posizionamento; incl. cavo di alimentazione; profilo di alluminio estruso per migliorare il bilancio termico; riflettore ad alta lucentezza con design sfaccettato; emissione diretta/indiretta; luce indiretta con chip dedicati e ottica lenticolare d'alta qualità, per una luminosità estensiva ed omogenea sul soffitto, a scelta con comandi separati; LED ad efficienza energetica con elevata resa cromatica

### Quickinfo

3000 K, 4000 K, tunable white  
2700 - 6500 K  
CRI  $\geq$  80, CRI  $\geq$  90 / 3 SDCM  
(initial MacAdam)  
UGR  $\leq$  10, UGR  $\leq$  13, UGR  $\leq$  16  
fino a  $\downarrow$  5,530 lm /  $\uparrow$  7,850 lm  
fino a 163 lm/W  
L90 / 75000 h  
DALI-2, DALI-2 / DALI-2  
ESSENTIAL sensor, DALI-2 D/I  
controllo separato  
Reflector  
IP20

### Types



### Colore



### Riflettore



### Distribuzione della luce



DiiA® standards  
251, 252, 253



chrome version  
available



special end cap  
& reflector  
design



DIN EN 12464-1  
UGR  $\leq$  19



system solution



glare-free direct  
and 170°  
indirect  
illumination



## SETA suspended



TUNABLE  
WHITE

CRI  
≥ 90

UGR  
≤ 10

cd/m<sup>2</sup>  
≤ 1500

DALI  
1-2 ADDR.

220-240 V

X-PERT


X-PERT

presence

brightness

### DIRECT / INDIRECT POWER


SYSTEM	LENGTH	COLOUR TEMP.	CRI ≥	REFLECTOR	LUM. FLUX	EFFICACY	ORDER CODE			
48.0 W	1863 mm	3000 K	80	chrome	↓3470/↑3440 lm	144 lm/W	0 7 4 - 5 2 4 6 5 <input type="checkbox"/> <input checked="" type="checkbox"/> R			
				dark chr.	↓2480/↑3440 lm	123 lm/W	0 7 4 - 5 2 4 6 5 <input type="checkbox"/> <input checked="" type="checkbox"/> B			
			90	chrome	↓3020/↑2970 lm	125 lm/W	0 7 4 - 5 2 4 6 0 <input type="checkbox"/> <input checked="" type="checkbox"/> R			
				dark chr.	↓2160/↑2970 lm	107 lm/W	0 7 4 - 5 2 4 6 0 <input type="checkbox"/> <input checked="" type="checkbox"/> B			
			80	4000 K	80	chrome	↓3690/↑3930 lm	159 lm/W	0 7 4 - 5 2 4 6 6 <input type="checkbox"/> <input checked="" type="checkbox"/> R	
						dark chr.	↓2640/↑3930 lm	137 lm/W	0 7 4 - 5 2 4 6 6 <input type="checkbox"/> <input checked="" type="checkbox"/> B	
		90	90		chrome	↓3020/↑3210 lm	130 lm/W	0 7 4 - 5 2 4 6 1 <input type="checkbox"/> <input checked="" type="checkbox"/> R		
					dark chr.	↓2160/↑3210 lm	112 lm/W	0 7 4 - 5 2 4 6 1 <input type="checkbox"/> <input checked="" type="checkbox"/> B		
		51.0 W	1863 mm		↓ 3000 K/ ↑ tunable w. ↓ 4000 K/ ↑ tunable w. tunable w.	90	chrome	↓3200/↑3050 lm	123 lm/W	0 7 4 - 5 2 D 6 0 4 <input type="checkbox"/> <input checked="" type="checkbox"/> R
							dark chr.	↓2290/↑3050 lm	105 lm/W	0 7 4 - 5 2 D 6 0 4 <input type="checkbox"/> <input checked="" type="checkbox"/> B
				90		90	chrome	↓3200/↑3050 lm	123 lm/W	0 7 4 - 5 2 D 6 1 4 <input type="checkbox"/> <input checked="" type="checkbox"/> R
							dark chr.	↓2290/↑3050 lm	105 lm/W	0 7 4 - 5 2 D 6 1 4 <input type="checkbox"/> <input checked="" type="checkbox"/> B
90	90			chrome		↓3320/↑3120 lm	126 lm/W	0 7 4 - 5 2 4 6 D <input type="checkbox"/> <input checked="" type="checkbox"/> R		
				dark chr.		↓2380/↑2890 lm	103 lm/W	0 7 4 - 5 2 4 6 D <input type="checkbox"/> <input checked="" type="checkbox"/> B		
82.0 W	3063 mm	3000 K	80	chrome	↓5200/↑6890 lm	147 lm/W	0 7 4 - 5 2 4 9 5 <input type="checkbox"/> <input checked="" type="checkbox"/> R			
				dark chr.	↓3720/↑6890 lm	129 lm/W	0 7 4 - 5 2 4 9 5 <input type="checkbox"/> <input checked="" type="checkbox"/> B			
			90	4000 K	90	chrome	↓4530/↑5940 lm	128 lm/W	0 7 4 - 5 2 4 9 0 <input type="checkbox"/> <input checked="" type="checkbox"/> R	
						dark chr.	↓3240/↑5940 lm	112 lm/W	0 7 4 - 5 2 4 9 0 <input type="checkbox"/> <input checked="" type="checkbox"/> B	
			80		80	chrome	↓5530/↑7850 lm	163 lm/W	0 7 4 - 5 2 4 9 6 <input type="checkbox"/> <input checked="" type="checkbox"/> R	
						dark chr.	↓3960/↑7850 lm	144 lm/W	0 7 4 - 5 2 4 9 6 <input type="checkbox"/> <input checked="" type="checkbox"/> B	
		90	90		chrome	↓4530/↑6410 lm	133 lm/W	0 7 4 - 5 2 4 9 1 <input type="checkbox"/> <input checked="" type="checkbox"/> R		
					dark chr.	↓3240/↑6410 lm	118 lm/W	0 7 4 - 5 2 4 9 1 <input type="checkbox"/> <input checked="" type="checkbox"/> B		
		87.0 W	3063 mm	tunable w.	90	chrome	↓4980/↑5770 lm	124 lm/W	0 7 4 - 5 2 4 9 D <input type="checkbox"/> <input checked="" type="checkbox"/> R	
						dark chr.	↓3570/↑5770 lm	107 lm/W	0 7 4 - 5 2 4 9 D <input type="checkbox"/> <input checked="" type="checkbox"/> B	
		88.0 W	3063 mm	↓ 3000 K/ ↑ tunable w. ↓ 4000 K/ ↑ tunable w.	90	chrome	↓4810/↑6110 lm	124 lm/W	0 7 4 - 5 2 D 9 0 4 <input type="checkbox"/> <input checked="" type="checkbox"/> R	
						dark chr.	↓3440/↑6110 lm	109 lm/W	0 7 4 - 5 2 D 9 0 4 <input type="checkbox"/> <input checked="" type="checkbox"/> B	
90	90				chrome	↓4810/↑6110 lm	124 lm/W	0 7 4 - 5 2 D 9 1 4 <input type="checkbox"/> <input checked="" type="checkbox"/> R		
					dark chr.	↓3440/↑6110 lm	109 lm/W	0 7 4 - 5 2 D 9 1 4 <input type="checkbox"/> <input checked="" type="checkbox"/> B		



### Order options

CONTROL	CONTROL	COLOUR	COLOUR
DALI-2	DALI-2	chrome	pure white RAL 9010
DALI-2 / DALI-2 ESSENTIAL sensor	DALI-2 D/I separately controllable	pure white RAL 9010	jet black RAL 9005
	DALI-2 / DALI-2 ESSENTIAL sensor	jet black RAL 9005	

## Planning Information

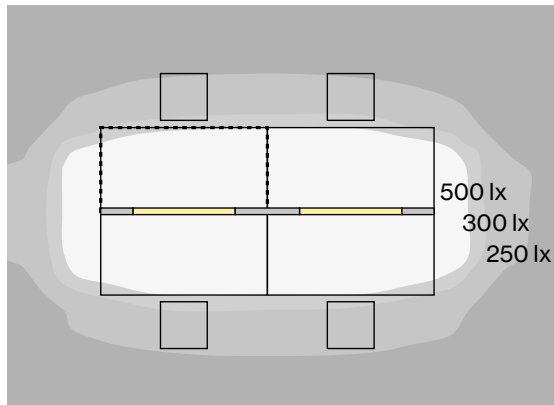

**SETA** suspended, 86 W, 4000 K  
direct/indirect power

### ROOM VALUES

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7   0.5   0.2
Maintenance factor	0.8
Mounting height	2.25 m

### CALCULATION SURFACE .....

Surface dimensions	1.6 × 0.8
Surface height	0.75
Average illuminance ( $E_m$ )	> 500 lx
Uniformity ( $U_0$ )	> 0.6

### GLARE EVALUATION

Table Classification	X=4H   Y=8H   S=0.25H
UGR transversal	≤ 19
UGR axial	≤ 19
	65° < 1500 cd/m <sup>2</sup>

### Order options

CONTROL		CONTROL		COLOUR		COLOUR	
DALI-2	3	DALI-2	3	chrome	4	pure white RAL 9010	7
DALI-2 / DALI-2 ESSENTIAL sensor	7	DALI-2 D/I separately controllable	4	pure white RAL 9010	7	jet black RAL 9005	8
		DALI-2 / DALI-2 ESSENTIAL sensor	7	jet black RAL 9005	8		

# Creative Lab, Barcelona

Spagna

**Lighting Design**  
MMAS Lighting

**Fotografo**  
Miquel Lonch




## Prodotti utilizzati



**SETA suspended**



**BETO suspended**



**BETO ceiling /  
suspended system**





