

SASSO 60 base 1 lamp

ceiling


^{EN} Cylindrical or square spotlight made of aluminium; light inset lacquered; housing powder coated; light inset rotatable and tiltable (cylindrical versions); surface mounted housing in aluminium incl. converter; mounting plate with pre-assembled converter unit can be pre-mounted; luminaire housing can be attached without tools by interlock; precise radiation characteristic due to high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering; luminaire for through wiring

^{IT} Faretto cilindrico o quadrato in alluminio; inserto verniciato; housing verniciato a polvere; inserto luce girevole e orientabile (versioni cilindriche); alloggiamento con montaggio a superficie in alluminio, convertitore incluso; piastra di montaggio preinstallabile con unità convertitore premontata; corpo illuminante montabile ad appoggio senza attrezzi tramite blocco di sicurezza; emissione precisa con ottica lenticolare di alta qualità; tecnologia COB (Chip on Board) per la massima efficienza; assenza di ombre multiple; LED efficienti con alta resa cromatica; apparecchio per cablaggio passante

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI \geq 90 / 2 SDCM (initial MacAdam)
 UGR \leq 10, UGR \leq 13, UGR \leq 16, UGR \leq 19
 fino a 95 lm/W
 L80 / 50000 h
 DALI-2, non DIM
 IP20

Types



Colore



Colore interno



Distribuzione della luce



glare control
(UGR \leq 16)



easy mounting
no visible
screws



CRI \geq 95 2
SDCM
(optional)




SASSO 60 base round adjustable 1 lamp ceiling



SPOT 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.4 W	2700 K	735 lm	71 lm/W	0 4 8 - 3 1 3 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	3000 K	759 lm	73 lm/W	0 4 8 - 3 1 3 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	3500 K	775 lm	75 lm/W	0 4 8 - 3 1 3 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	4000 K	799 lm	77 lm/W	0 4 8 - 3 1 3 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour traffic white.



MEDIUM 27°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	874 lm	86 lm/W	0 4 8 - 3 1 3 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	3000 K	907 lm	89 lm/W	0 4 8 - 3 1 3 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	3500 K	927 lm	91 lm/W	0 4 8 - 3 1 3 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	4000 K	946 lm	93 lm/W	0 4 8 - 3 1 3 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M

The data values for the luminous flux may differ for specific order options by -9%. Luminous flux value refers to inner colour traffic white.

FLOOD 40°-41°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	831 lm	81 lm/W	0 4 8 - 3 1 3 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	3000 K	862 lm	85 lm/W	0 4 8 - 3 1 3 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	3500 K	880 lm	86 lm/W	0 4 8 - 3 1 3 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	4000 K	899 lm	88 lm/W	0 4 8 - 3 1 3 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F

The data values for the luminous flux may differ for specific order options by -14%. Luminous flux value refers to inner colour traffic white.

WIDE FLOOD 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	876 lm	86 lm/W	0 4 8 - 3 1 3 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	3000 K	909 lm	89 lm/W	0 4 8 - 3 1 3 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	3500 K	928 lm	91 lm/W	0 4 8 - 3 1 3 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	4000 K	948 lm	93 lm/W	0 4 8 - 3 1 3 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W

The data values for the luminous flux may differ for specific order options by -11%. Luminous flux value refers to inner colour traffic white.

Order options

CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black RAL 9005	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white RAL 9016	7
				gold dust RAL 260-M	9




SASSO 60 base square downlight 1 lamp ceiling



SPOT 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.4 W	2700 K	751 lm	72 lm/W	0 4 8 - 3 0 3 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	3000 K	775 lm	75 lm/W	0 4 8 - 3 0 3 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	3500 K	792 lm	76 lm/W	0 4 8 - 3 0 3 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	4000 K	816 lm	78 lm/W	0 4 8 - 3 0 3 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S

The data values for the luminous flux may differ for specific order options by -7%. Luminous flux value refers to inner colour matt silver.



MEDIUM 27°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	894 lm	88 lm/W	0 4 8 - 3 0 3 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	3000 K	928 lm	91 lm/W	0 4 8 - 3 0 3 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	3500 K	948 lm	93 lm/W	0 4 8 - 3 0 3 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	4000 K	968 lm	95 lm/W	0 4 8 - 3 0 3 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M

The data values for the luminous flux may differ for specific order options by -9%. Luminous flux value refers to inner colour matt silver.

FLOOD 40°-42°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	856 lm	84 lm/W	0 4 8 - 3 0 3 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	3000 K	888 lm	87 lm/W	0 4 8 - 3 0 3 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	3500 K	907 lm	89 lm/W	0 4 8 - 3 0 3 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	4000 K	926 lm	91 lm/W	0 4 8 - 3 0 3 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F

The data values for the luminous flux may differ for specific order options by -13%. Luminous flux value refers to inner colour matt silver.

WIDE FLOOD 57°-58°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	895 lm	88 lm/W	0 4 8 - 3 0 3 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	3000 K	928 lm	91 lm/W	0 4 8 - 3 0 3 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	3500 K	949 lm	93 lm/W	0 4 8 - 3 0 3 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	4000 K	969 lm	95 lm/W	0 4 8 - 3 0 3 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W

The data values for the luminous flux may differ for specific order options by -10%. Luminous flux value refers to inner colour matt silver.

Order options

CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black RAL 9005	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white RAL 9016	7
				gold dust RAL 260-M	9

Oppenländer Rechtsanwälte, Stuttgart


Germania

Architetto

Ippolito Fleitz Group
GmbH

Fotografo

Zoey Braun

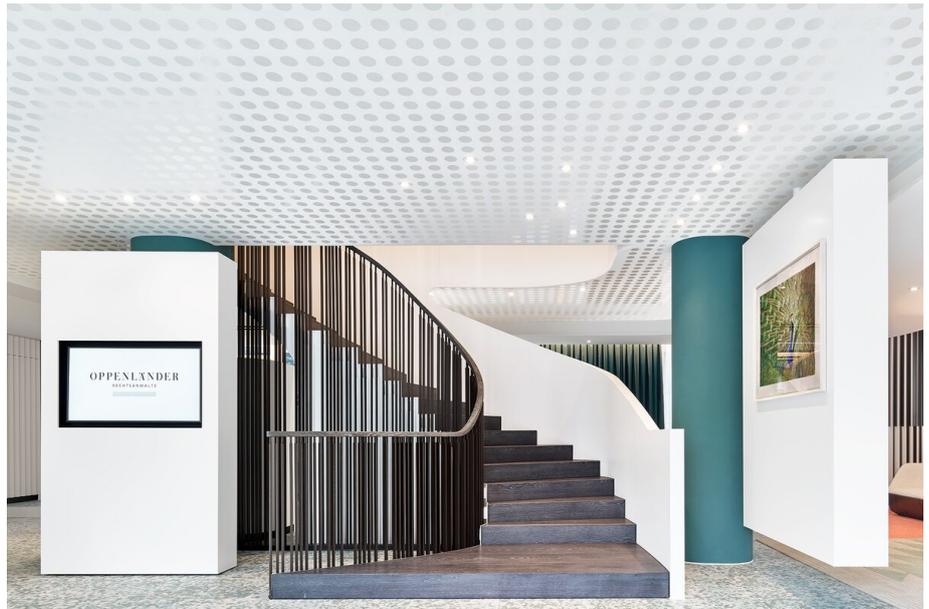

Prodotti utilizzati



SASSO 100 round ceiling



MINO 60 CIRCLE suspended



SASSO PRO 80 adjustable flush round recessed



SASSO 60 base 1 lamp ceiling

