



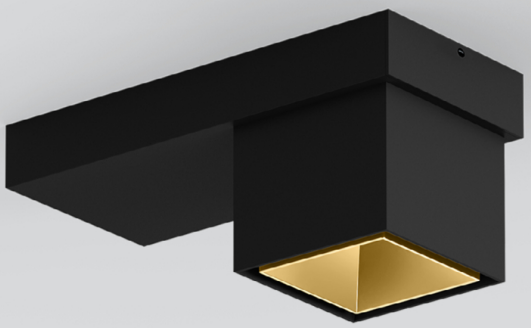

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
UGR ≤ 10, UGR ≤ 13, UGR ≤ 16, UGR ≤ 19
fino a 95 lm/W
L90 / 100000 h
DALI-2, non DIM
IP20

Types



Colours

Colore interno

Distribuzione della luce

SASSO 60 base 1 lamp

ceiling

EN Cylindrical or square spotlight made of aluminium; light inset lacquered; housing powder coated; light inset rotatable and tiltable (cylindrical versions); surface mounted housing in aluminium incl. converter; mounting plate with pre-assembled converter unit can be pre-mounted; luminaire housing can be attached without tools by interlock; precise radiation characteristic due to high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering; luminaire for through wiring

IT Faretto cilindrico o quadrato in alluminio; inserto verniciato; housing verniciato a polvere; inserto luce girevole e orientabile (versioni cilindr.); alloggiamento con montaggio a superficie in alluminio, convertitore incluso; piastra di montaggio preinstallabile con unità convertitore premontata; corpo illuminante montabile ad appoggio senza attrezzi tramite blocco di sicurezza; emissione precisa con ottica lenticolare di alta qualità; tecnologia COB (Chip on Board) per la massima efficienza; assenza di ombre multiple; LED efficienti con alta resa cromatica; apparecchio per cablaggio passante



glare control
(UGR ≤ 16)




easy mounting
no visible
screws



CRI ≥ 95 2
SDCM
(optional)





SASSO 60 base round adjustable 1 lamp ceiling

30° 360° | CRI ≥ 90 | 2 SDCM | UGR ≤ 10 | cd/m² ≤ 1500 | 220-240 V | 1 ADDR. | X-PERT | X-PERT

SPOT 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.4 W	2700 K	735 lm	71 lm/W	0 4 8 - 3 1 3 0 9 S
	3000 K	759 lm	73 lm/W	0 4 8 - 3 1 3 0 0 S
	3500 K	775 lm	75 lm/W	0 4 8 - 3 1 3 0 2 S
	4000 K	799 lm	77 lm/W	0 4 8 - 3 1 3 0 1 S

The data values for the luminous flux of fraction may differ for specific order options by -8%. Luminous flux value refers to inner colour traffic white.

MEDIUM 27°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	874 lm	86 lm/W	0 4 8 - 3 1 3 0 9 M
	3000 K	907 lm	89 lm/W	0 4 8 - 3 1 3 0 0 M
	3500 K	927 lm	91 lm/W	0 4 8 - 3 1 3 0 2 M
	4000 K	946 lm	93 lm/W	0 4 8 - 3 1 3 0 1 M

The data values for the luminous flux of fraction may differ for specific order options by -9%. Luminous flux value refers to inner colour traffic white.

FLOOD 40°-41°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	831 lm	81 lm/W	0 4 8 - 3 1 3 0 9 F
	3000 K	862 lm	85 lm/W	0 4 8 - 3 1 3 0 0 F
	3500 K	880 lm	86 lm/W	0 4 8 - 3 1 3 0 2 F
	4000 K	899 lm	88 lm/W	0 4 8 - 3 1 3 0 1 F

The data values for the luminous flux of fraction may differ for specific order options by -14%. Luminous flux value refers to inner colour traffic white.

WIDE FLOOD 56°, CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	876 lm	86 lm/W	0 4 8 - 3 1 3 0 9 W
	3000 K	909 lm	89 lm/W	0 4 8 - 3 1 3 0 0 W
	3500 K	928 lm	91 lm/W	0 4 8 - 3 1 3 0 2 W
	4000 K	948 lm	93 lm/W	0 4 8 - 3 1 3 0 1 W

The data values for the luminous flux of fraction may differ for specific order options by -11%. Luminous flux value refers to inner colour traffic white.

Order options

CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black RAL 9005	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white RAL 9016	7
				gold dust RAL 260-M	9





SASSO 60 base square downlight 1 lamp ceiling

CRI ≥ 90 · 2 SDCM · UGR ≤ 13 · cd/m² ≤ 1500 · 220-240 V · 1 ADDR. · X-PERT · X-PERT

SPOT 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.4 W	2700 K	751 lm	72 lm/W	0 4 8 - 3 0 3 0 9 ⇕ ◪ ■ S
	3000 K	775 lm	75 lm/W	0 4 8 - 3 0 3 0 0 ⇕ ◪ ■ S
	3500 K	792 lm	76 lm/W	0 4 8 - 3 0 3 0 2 ⇕ ◪ ■ S
	4000 K	816 lm	78 lm/W	0 4 8 - 3 0 3 0 1 ⇕ ◪ ■ S

The data values for the luminous flux of fraction may differ for specific order options by -7%. Luminous flux value refers to inner colour matt silver.

MEDIUM 27°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	894 lm	88 lm/W	0 4 8 - 3 0 3 0 9 ⇕ ◪ ■ M
	3000 K	928 lm	91 lm/W	0 4 8 - 3 0 3 0 0 ⇕ ◪ ■ M
	3500 K	948 lm	93 lm/W	0 4 8 - 3 0 3 0 2 ⇕ ◪ ■ M
	4000 K	968 lm	95 lm/W	0 4 8 - 3 0 3 0 1 ⇕ ◪ ■ M

The data values for the luminous flux of fraction may differ for specific order options by -9%. Luminous flux value refers to inner colour matt silver.

FLOOD 40°-42°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	856 lm	84 lm/W	0 4 8 - 3 0 3 0 9 ⇕ ◪ ■ F
	3000 K	888 lm	87 lm/W	0 4 8 - 3 0 3 0 0 ⇕ ◪ ■ F
	3500 K	907 lm	89 lm/W	0 4 8 - 3 0 3 0 2 ⇕ ◪ ■ F
	4000 K	926 lm	91 lm/W	0 4 8 - 3 0 3 0 1 ⇕ ◪ ■ F

The data values for the luminous flux of fraction may differ for specific order options by -13%. Luminous flux value refers to inner colour matt silver.

WIDE FLOOD 57°-58°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	895 lm	88 lm/W	0 4 8 - 3 0 3 0 9 ⇕ ◪ ■ W
	3000 K	928 lm	91 lm/W	0 4 8 - 3 0 3 0 0 ⇕ ◪ ■ W
	3500 K	949 lm	93 lm/W	0 4 8 - 3 0 3 0 2 ⇕ ◪ ■ W
	4000 K	969 lm	95 lm/W	0 4 8 - 3 0 3 0 1 ⇕ ◪ ■ W

The data values for the luminous flux of fraction may differ for specific order options by -10%. Luminous flux value refers to inner colour matt silver.

Order options

CONTROL ⇕		COLOUR ◪		INNER COLOUR ■	
non DIM	1	jet black RAL 9005	1	jet black RAL 9005	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white RAL 9016	7
				gold dust RAL 260-M	9

Oppenländer Rechtsanwälte, Stuttgart

Germania

Architetto
Ippolito Fleitz Group GmbH

Fotografo
Zooey Braun



Prodotti utilizzati




SASSO 100 round ceiling




MINO 60 CIRCLE suspended



SASSO 60 base 1 lamp ceiling



SASSO PRO 80 adjustable flush round recessed



SASSO 60 round downlight recessed 1 lamp

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com


OPPENLÄNDER
RECHTSANWÄLTE






OPPENL







