
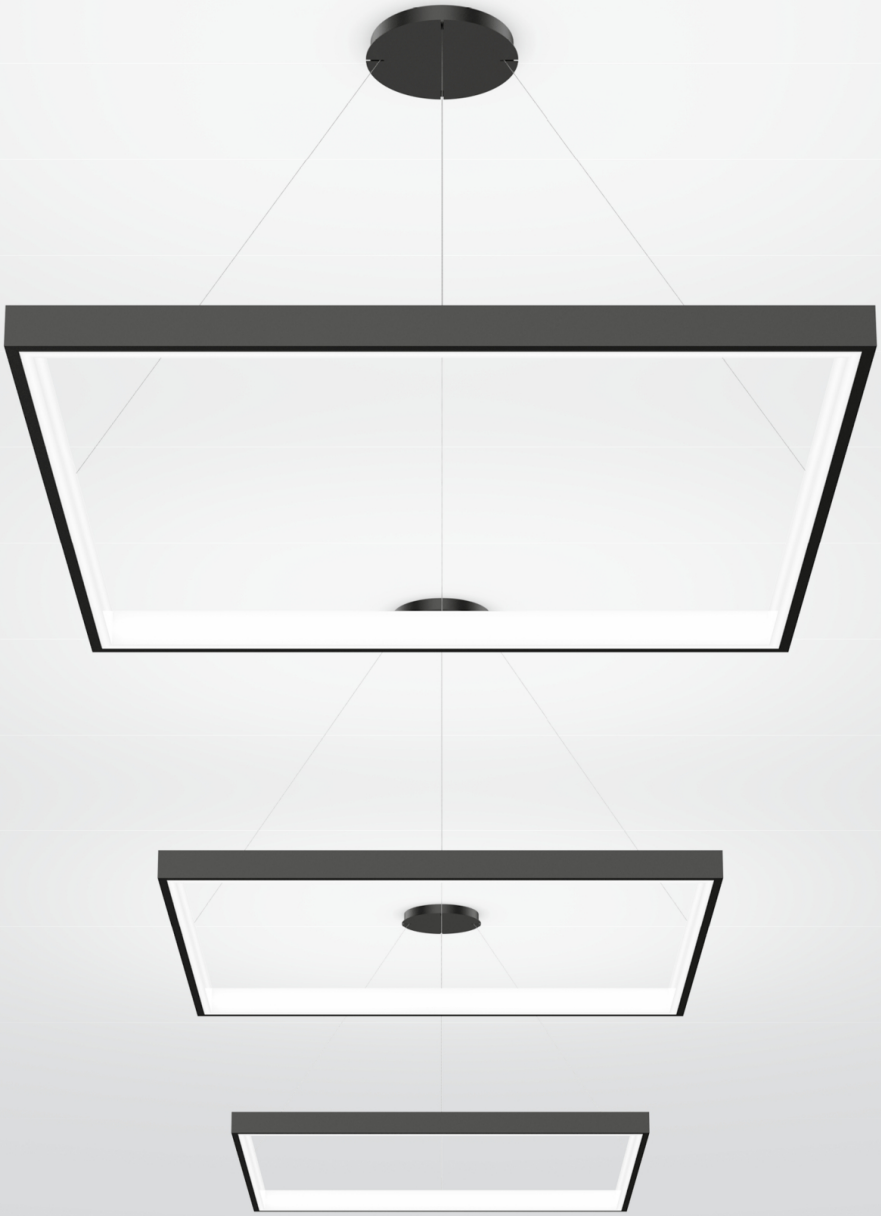


## Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
fino a ↓ 4.930 lm / ↑ 4.930 lm
fino a 133 lm/W
L90 / 50000 h
Cover: Opal
DALI-2
IP20

### Types




### Colours

### Distribuzione della luce

# **INO** square

suspended

EN Square aluminium luminaire housing; surface powder coated; pendant fitting with cable suspension; height adjustment without tools; incl. transparent feed; electronic operating unit installed in the canopy; completely homogeneously illuminated, satinised PMMA cover; inwards facing emission characteristics; direct/indirect illumination characteristic for additional emphasis of the ceiling and more visual comfort; energy-efficient LEDs with very good colour rendering; canopy with 2 cable openings and plug-in terminal for through wiring

IT Corpo illuminante quadrato in alluminio; verniciatura a polvere; sospeso con cavo a sospensione; regolazione altezza senza utensili; incl. cavo di alimentazione trasparente; alimentatore elettronico montato nel rosone; diffusore satinato in PMMA a illuminazione assolutamente omogenea; emissione verso l'interno; emissione diretta/indiretta per maggiore accentuazione del soffitto e migliore comfort visivo; LED ad efficienza energetica con elevata resa cromatica; rosone con 2 ingressi cavi e morsetto per cablaggio passante





DiiA® standards 251, 252, 253




direct / indirect illumination




tunable white 2700 – 6500 K (optional)



CRI ≥ 98 XPECTRUM (optional)







## **INO 750** square suspended


CRI ≥ 90 | 220-240 V | DALI 1 ADDR. | X-PERT | X-PERT

**OPAL** CRI ≥ 90, DALI-2

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 38.0 W | 2700 K | ↧2170/↥2160 lm | 114 lm/W | 0 3 4 - 4 4 4 2 4 3 ◪ H |
| | 3000 K | ↧2280/↥2270 lm | 120 lm/W | 0 3 4 - 4 4 4 2 5 3 ◪ H |
| | 4000 K | ↧2470/↥2460 lm | 130 lm/W | 0 3 4 - 4 4 4 2 6 3 ◪ H |

The data values for the luminous flux may differ for specific order options by -15%. Luminous flux value refers to colour pure white.







## **INO 1000** square suspended


CRI ≥ 90 | 220-240 V | DALI 1 ADDR. | X-PERT | X-PERT

**OPAL** CRI ≥ 90, DALI-2

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 51.0 W | 2700 K | ↧2890/↥2890 lm | 113 lm/W | 0 3 4 - 4 4 4 3 4 3 ◪ H |
| | 3000 K | ↧3040/↥3030 lm | 119 lm/W | 0 3 4 - 4 4 4 3 5 3 ◪ H |
| | 4000 K | ↧3290/↥3280 lm | 129 lm/W | 0 3 4 - 4 4 4 3 6 3 ◪ H |

The data values for the luminous flux may differ for specific order options by -15%. Luminous flux value refers to colour pure white.






## **INO 1250** square suspended

CRI ≥ 90 | 220-240 V | DALI 1 ADDR. | X-PERT | X-PERT


**OPAL** CRI ≥ 90, DALI-2


| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 63.0 W | 2700 K | ↧3610/↥3610 lm | 115 lm/W | 0 3 4 - 4 4 4 4 4 3 ◪ H |
| | 3000 K | ↧3790/↥3790 lm | 120 lm/W | 0 3 4 - 4 4 4 4 5 3 ◪ H |
| | 4000 K | ↧4110/↥4110 lm | 130 lm/W | 0 3 4 - 4 4 4 4 6 3 ◪ H |

The data values for the luminous flux may differ for specific order options by -15%. Luminous flux value refers to colour pure white.

**Order options**

| COLOUR | ◪ |
|---|---|
| pure white RAL 9010 | 7 |
| jet black RAL 9005 | 8 |
| white aluminium RAL 9006 | G |
| special colours | X |






## **INO 1500** square suspended

CRI ≥ 90 · 220-240 V · DALI 1 ADDR. · X-PERT · X-PERT

**OPAL** CRI ≥ 90, DALI-2

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 74.0 W | 2700 K | ↧4330/↥4330 lm | 117 lm/W | 0 3 4 - 4 4 4 5 4 3 ◪ H |
| | 3000 K | ↧4550/↥4550 lm | 123 lm/W | 0 3 4 - 4 4 4 5 5 3 ◪ H |
| | 4000 K | ↧4930/↥4930 lm | 133 lm/W | 0 3 4 - 4 4 4 5 6 3 ◪ H |

The data values for the luminous flux may differ for specific order options by -15%. Luminous flux value refers to colour pure white.

### Order options

| COLOUR | ◪ |
|---|---|
| pure white RAL 9010 | 7 |
| jet black RAL 9005 | 8 |
| white aluminium RAL 9006 | G |
| special colours | X |


# Granitlab Coworking

Austria

**Architetto**
GHT-Plan GmbH

**Lighting Design**
GHT-Plan GmbH, AREA
C.I. Design GmbH

**Fotografo**
Kurt Kuball

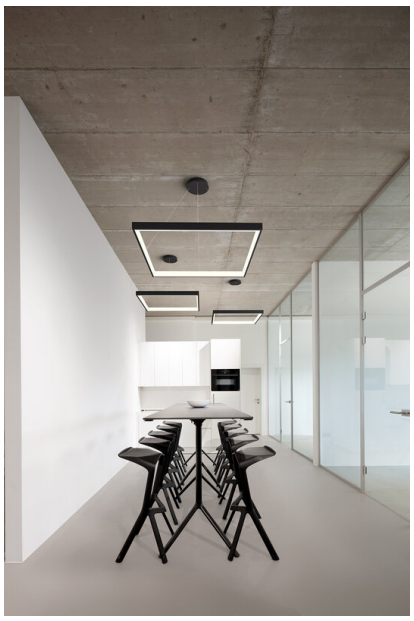

**Prodotti utilizzati**



**BETO suspended**



**INO square suspended**



**UNICO Q1 / Q4 ceiling**

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

