



STREAMCUT

wall

EN Recessed wall luminaire in aluminium in a simple, minimalist design; surface anodised and powder coated in dark grey or black; partially printed safety glass, fixed with stainless steel screws; reflector in matt anodised aluminium with asymmetric radiation characteristic; energy-efficient LEDs with very good colour rendering; degree of protection IP65, with pressure compensation valve; ambient temperatures from -20°C to +50°C; separate luminaire wiring compartment, suitable for through wiring

IT Apparecchio da incasso in parete in alluminio, design sottile e minimale; superficie anodizzata e verniciata a polveri in grigio scuro o nero; vetro di sicurezza parzialmente serigrafato, fissato con viti di acciaio inox; riflettore in alluminio puro anodizzato satinato con emissione asimmetrica; LED ad efficienza energetica con elevata resa cromatica; protezione IP65, valvola di compens. pressione; temperature ambiente da -20°C a +50°C; vano allacciamento separato, adatto per cablaggio passante

Quickinfo

3000 K
CRI \geq 80 / 3 SDCM (initial MacAd
fino a 39 lm/W
L80 / 50000 h
non DIM
IP65, IK08

Types



Colore




Distribuzione della luce






STREAMCUT wall




ASYMMETRIC CRI ≥ 80, non DIM

SYSTEM	COLOUR TEMP.	COLOUR	LUM. FLUX	EFFICACY	ORDER CODE
7.6 W	3000 K	grey aluminium	293 lm	39 lm/W	0 8 8 - 2 8 3 1 5 1 D
		jet black	293 lm	39 lm/W	0 8 8 - 2 8 3 1 5 1 8




Planning Information

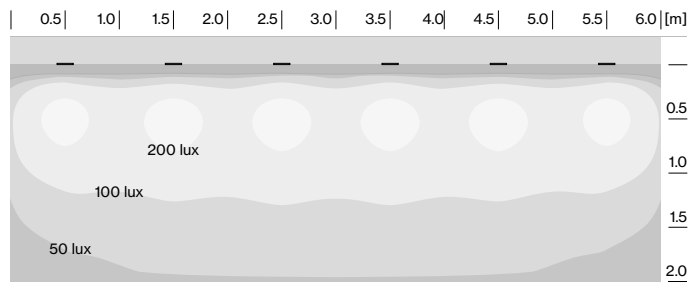

STREAMCUT wall (8.4 W, 6 luminaires)
 wall mounting height from bottom: 0.8m / distance between luminaires: 1.0m

Mounting accessories (optional)



MOUNTING HOUSING for concrete and solid walls

L·W·H (mm)	ORDER CODE
290-100-200	0 8 8 - 2 8 9 1 1 1 0

Order options

COLOUR	
jet black	RAL 9005
grey aluminium	RAL 9007