


Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
fino a 62 lm/W
L80 / 50000 h, L90 / 50000 h
DALI-2, non DIM
IP20

Types

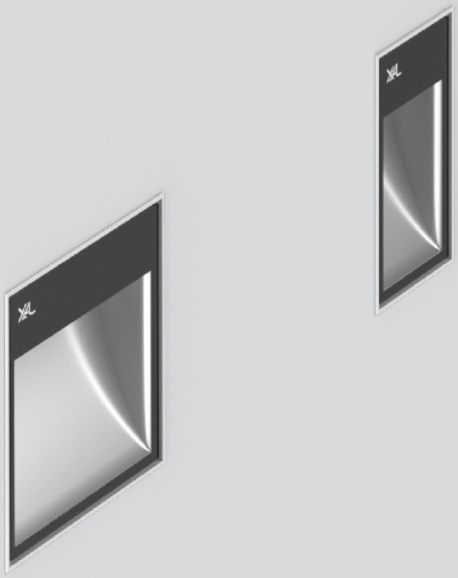

Colours

Set di montaggio

Distribuzione della luce

UNICO wall

recessed

EN Recessed wall luminaire in aluminium; installation without tools in mounting set (trimless or with trim) with ball catch system; installation possible in different housings; surface powder coated; incl. external converter; high-quality reflector with micro-faceted, aluminum-vaporised surface; different asymmetrical light distributions; installation optionally for floor or ceiling illumination; energy-efficient high power LEDs with very good colour rendering


IT App. a incasso da parete in allum.; set di fissaggio con cuscinetto a sfera, senza bisogno di utensili (con o senza bordo perimetrale); incasso possibile in vari telai; verniciatura a polvere; incl. convertitore esterno; riflettore di alta qualità con superficie a microfaccette e vaporizzata in alluminio; diverse distribuzioni di luce asimmetriche; montaggio per illum. pavimento o soffitto a scelta; LED high power a risparmio energetico con ottima resa cromatica



homogeneous floor illumination



saftey glass for dust protection





UNICO wall 1 lamp recessed

CRI ≥ 90 · 220-240 V · DALI 1 ADDR. · X-PERT

WIDE FLOOR jet black, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.0 W	2700 K	492 lm	55 lm/W	090-6L14 ⇕ UB001
	3000 K	524 lm	58 lm/W	090-6L15 ⇕ UB001
	4000 K	562 lm	62 lm/W	090-6L16 ⇕ UB001






UNICO wall 2 lamps recessed

CRI ≥ 90 · 220-240 V · DALI 1 ADDR. · X-PERT


WIDE FLOOR jet black, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.3 W	2700 K	934 lm	54 lm/W	090-6L24 ⇕ UB001
	3000 K	995 lm	58 lm/W	090-6L25 ⇕ UB001
	4000 K	1070 lm	62 lm/W	090-6L26 ⇕ UB001




Planning Information

wide floor

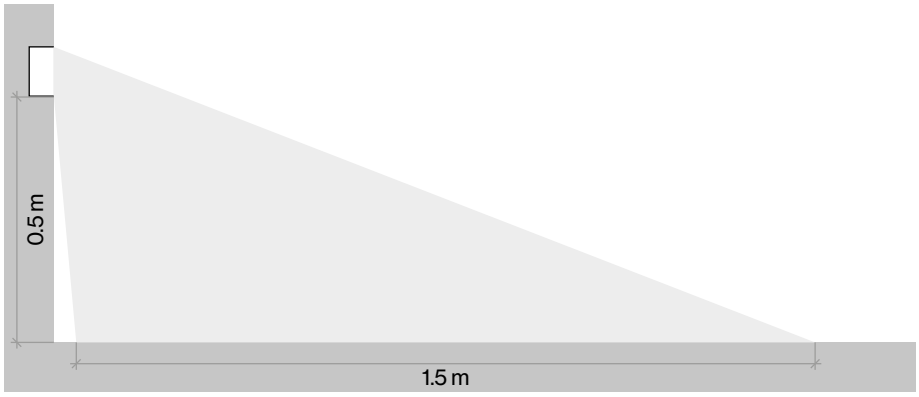

Mounting accessories (required)




MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L·W·H (mm)	ORDER CODE
12.5/15/20/25 mm	85·47·47	090-7L201 00

for UNICO L2 and UNICO wall recessed 1 lamp

Order options

CONTROL	⇕	COLOUR	
non DIM	1	jet black	RAL 9005
DALI-2	3	traffic white	RAL 9016



MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L·W·H (mm)	ORDER CODE
12.5/15/20/25 mm	85·85·47	090-7Q40100

for UNICO Q4 | UNICO wall recessed 2 lamps



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L·W·H (mm)	ORDER CODE
jet black	101·63·30	090-7L2020B
traffic white	101·63·30	090-7L2020W

for UNICO L2 and UNICO wall recessed 1 lamp




MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L·W·H (mm)	ORDER CODE
jet black	101·101·30	090-7Q4020B
traffic white	101·101·30	090-7Q4020W

for UNICO Q4 | UNICO wall recessed 2 lamps

Mounting accessories (optional)



PRIMED CONCRETE MOUNTING HOUSING

L·W·H (mm)	ORDER CODE
240·400·130	052-1914320

order mounting set separately

Order options

COLOUR	
jet black	RAL 9005
traffic white	RAL 9016