






Quickinfo

feltro PET composto da almeno il 50% di materiale riciclato post-consumer
fino a classe di assorbimento acustico A
disponibile la versione ritardante di fiamma

Types



Colours



MINO CIRCLE acoustic


ceiling / suspended


EN Acoustic element made of high quality, self-supporting, at least 75 % recycled PET felt with sound absorbing properties; round design; high quality visual and tactile surface; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; choice of surface mounted and pendant versions with cable suspension; toolless suspension height adjustment of the acoustic element


IT Elemento acustico in feltro prodotto con PET riciclato per almeno il 75 %, alta qualità, autoportante e con proprietà fonoassorbenti; forma rotonda; finitura con caratteristiche estetiche e tattili di alta qualità; assorbimento del suono diretto e del suono riflesso dal soffitto; con elevata performance acustica; a scelta tra versione applicata o sospesa con cavo a sospensione; regolazione in altezza senza attrezzi sull'elemento acustico




made of at least 75% post-consumer recycled PET felt









MINO CIRCLE acoustic

A B **C** D E	PET felt	0.7 NRC	0.74 SAA
α_w = 0.65			

CEILING

COLOUR	ORDER CODE
anthracite	0 3 4 - 2 7 1 **D** 1 1 B
black	0 3 4 - 2 7 1 **D** 1 1 L
felt grey	0 3 4 - 2 7 1 **D** 1 1 G
limestone	0 3 4 - 2 7 1 **D** 1 1 S
marble grey	0 3 4 - 2 7 1 **D** 1 1 D
white	0 3 4 - 2 7 1 **D** 1 1 W

EQUIVALENT SOUND ABSORPTION AREA (A_{EQ} M^2)

Ø(mm)	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
937	0.1	0.27	0.7	1.17	1.07	1
1434	0.3	0.6	1.43	2.3	2.17	2.1


SUSPENDED

COLOUR	ORDER CODE
anthracite	0 3 4 - 2 7 2 **D** 1 1 B
black	0 3 4 - 2 7 2 **D** 1 1 L
felt grey	0 3 4 - 2 7 2 **D** 1 1 G
limestone	0 3 4 - 2 7 2 **D** 1 1 S
marble grey	0 3 4 - 2 7 2 **D** 1 1 D
white	0 3 4 - 2 7 2 **D** 1 1 W

EQUIVALENT SOUND ABSORPTION AREA (A_{EQ} M^2)

Ø(mm)	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
937	0.5	0.5	0.87	1.3	1.43	1.57
1434	0.97	1.2	1.83	2.67	3.07	3.3

SOUND ABSORPTION COEFFICIENTS

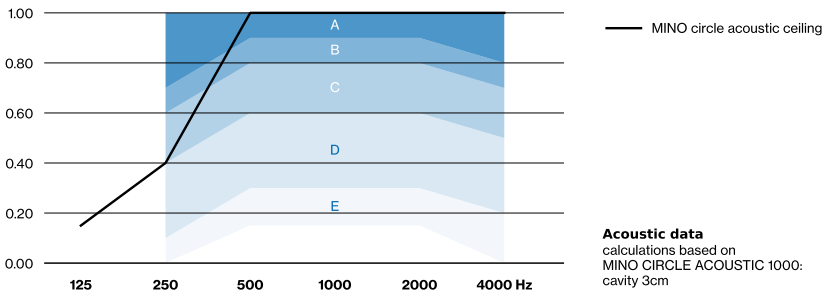


Acoustic data
calculations based on
MINO CIRCLE ACOUSTIC 1000:
cavity 3cm

Order options

DIAMETER	D
937 mm	1
1434 mm	2

COLOUR	
anthracite	RAL 7021
marble grey	RAL 7047
felt grey	RAL 7037
limestone	RAL 070 70 20

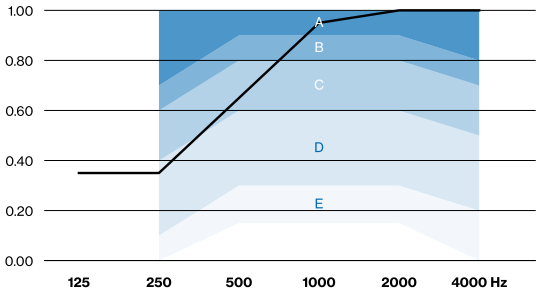

Acoustic data
calculations based on
MINO CIRCLE ACOUSTIC 1000:
cavity 100cm

Office e-sy AG

Svizzera

Lighting Design
Studio Z20 AG


Fotografo
Philip Böni




Prodotti utilizzati



MINO 60 CURVE ceiling / suspended system





MINO CIRCLE acoustic ceiling / suspended



SASSO 60 round downlight recessed 1 lamp

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

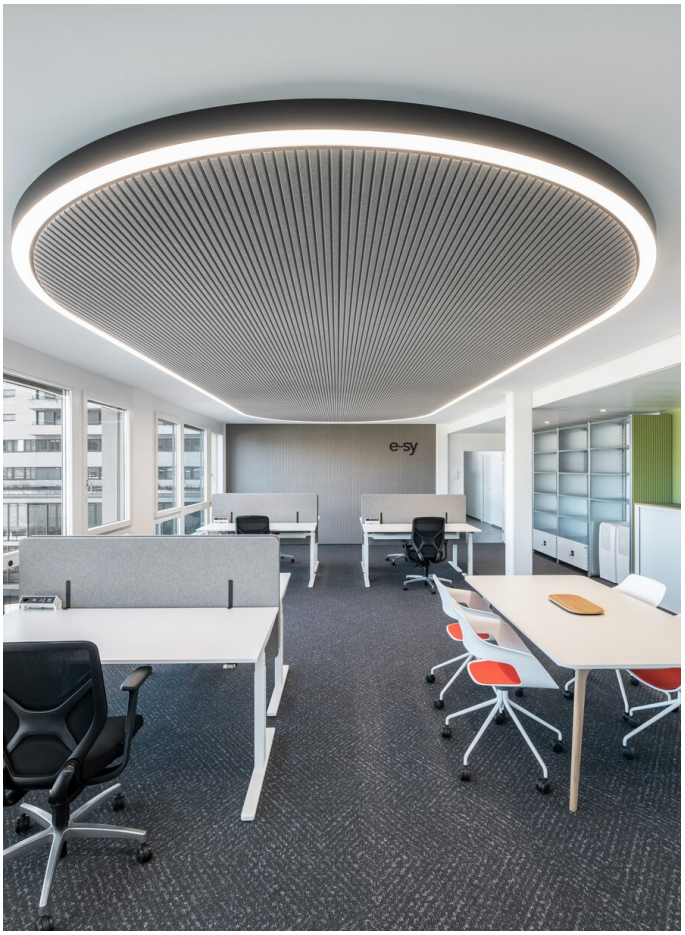
e-sy

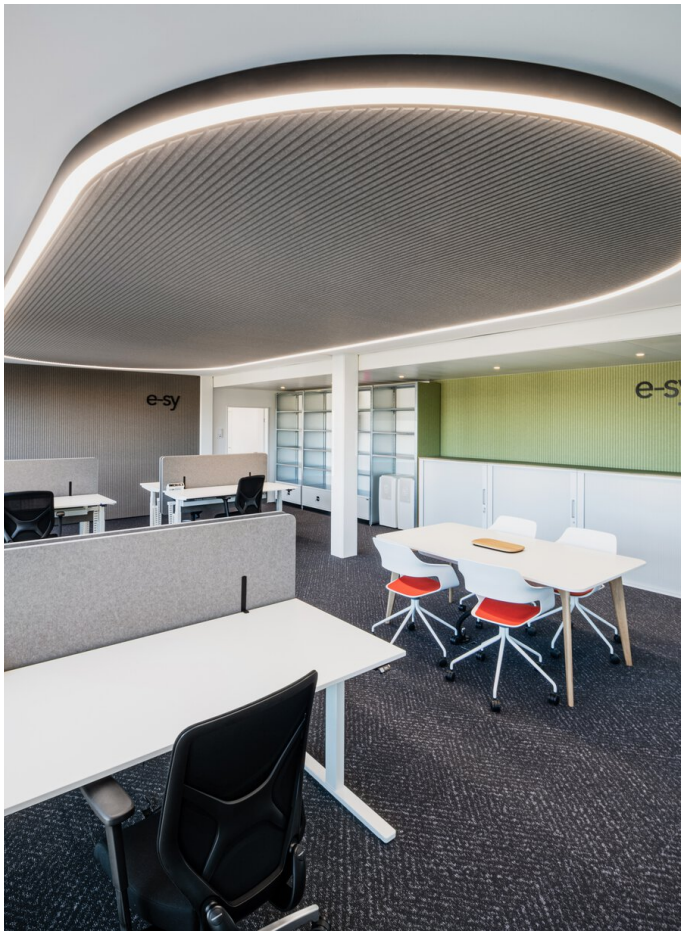
e-sy

