


Quickinfo

3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
UGR ≤ 10, UGR ≤ 13, UGR ≤ 19
fino a ↓ 8.760 lm / ↑ 18.600 lm
fino a 129 lm/W
L90 / 50000 h
DIM touch sul palo, sensore
ESSENTIAL autonomo
Microprismatic
IP20

Types

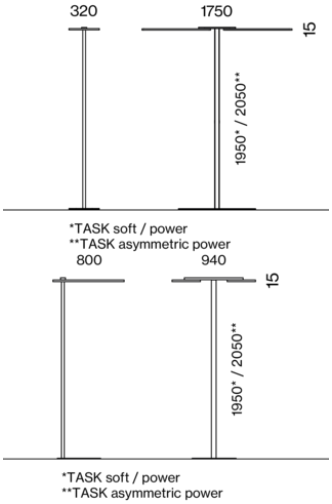

Colours



Distribuzione della luce



TASK

free standing double

EN Free standing luminaire with two rectangular luminaire head made of aluminium and rounded edges; luminaire heads arranged either parallel or linear; ultra low-profile design (only 15 mm); rectangular downpipe; pedestal with recess for table base; surface powder coated; direct/indirect light distribution by LGP body (Light Guiding Prism); side coupled light, directed up and down by laser engraving; optional: indirect component with special PCBs for increased luminous flux; optional: indirect component with special, inclined PCBs for asymmetric radiation characteristic; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; switch installed in the downpipe; incl. connection cable (3m) with safety plug

IT Apparecchio verticale con due teste di illuminazione rettangolari in alluminio e bordi arrotondati; scelta di teste di illuminazione paralleli o lineari; forma ultrapiatta (solo 15 mm); stelo rettangolare; piedistallo con apertura per piede tavolo; verniciatura a polvere; distribuzione della luce diretta/indiretta con sistema LGP-Body (Light Guiding Prism); luce convogliata lateralmente direzionata in basso e e su tramite incisione laser; opzionale: componente di luce indiretta con piastre proprie per un flusso luminoso potenziato; opzionale: componente di luce indiretta con piastre proprie inclinate per un'emissione asimmetrica; illuminazione assolutamente omogenea; LED ad efficienza energetica con elevata resa cromatica; interruttore integrato nello stelo; incl. cavo di collegamento (3 m) con spina Schuko




SENSE sensor on request



lighting control by touch DIM on pole




tunable white 2700 – 6500 K (optional)



CRI ≥ 98 XPECTRUM (optional)





*TASK soft / power
**TASK asymmetric power

TASK free standing double

CRI ≥ 90 | UGR ≤ 10 | cd/m² ≤3000 | 220-240 V | X-PERT | X-PERT | presence | brightness

DIRECT / INDIRECT SOFT CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
143.0 W	3000 K	↧8210/↥6690 lm	104 lm/W	X059-29630 ◆ Z
	4000 K	↧8760/↥7140 lm	111 lm/W	X059-29631 ◆ Z


DIRECT / INDIRECT POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
161.0 W	3000 K	↧4800/↥14700 lm	121 lm/W	X059-29620 ◆ Z
	4000 K	↧5110/↥15600 lm	129 lm/W	X059-29621 ◆ Z

DIRECT / INDIRECT ASYMMETRIC POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
188.0 W	3000 K	↧3810/↥17300 lm	112 lm/W	X059-29610 ◆ Z
	4000 K	↧4050/↥18600 lm	120 lm/W	X059-29611 ◆ Z





*TASK soft / power
**TASK asymmetric power

TASK free standing double long

CRI ≥ 90 | UGR ≤ 10 | cd/m² ≤3000 | 220-240 V | X-PERT | X-PERT | presence | brightness

DIRECT / INDIRECT SOFT CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
143.0 W	3000 K	↧8210/↥6690 lm	104 lm/W	X059-29030 ◆ Z
	4000 K	↧8760/↥7140 lm	111 lm/W	X059-29031 ◆ Z

DIRECT / INDIRECT POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
161.0 W	3000 K	↧4800/↥14700 lm	121 lm/W	X059-29020 ◆ Z
	4000 K	↧5110/↥15600 lm	129 lm/W	X059-29021 ◆ Z

DIRECT / INDIRECT ASYMMETRIC POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
188.0 W	3000 K	↧3810/↥17300 lm	112 lm/W	X059-29010 ◆ Z
	4000 K	↧4050/↥18600 lm	120 lm/W	X059-29011 ◆ Z

Order options

CONTROL ◆	
touch DIM on pole	5
stand alone ESSENTIAL sensor	7

COLOUR ◪	
white aluminium RAL 9006	6
pure white RAL 9010	7
jet black RAL 9005	8