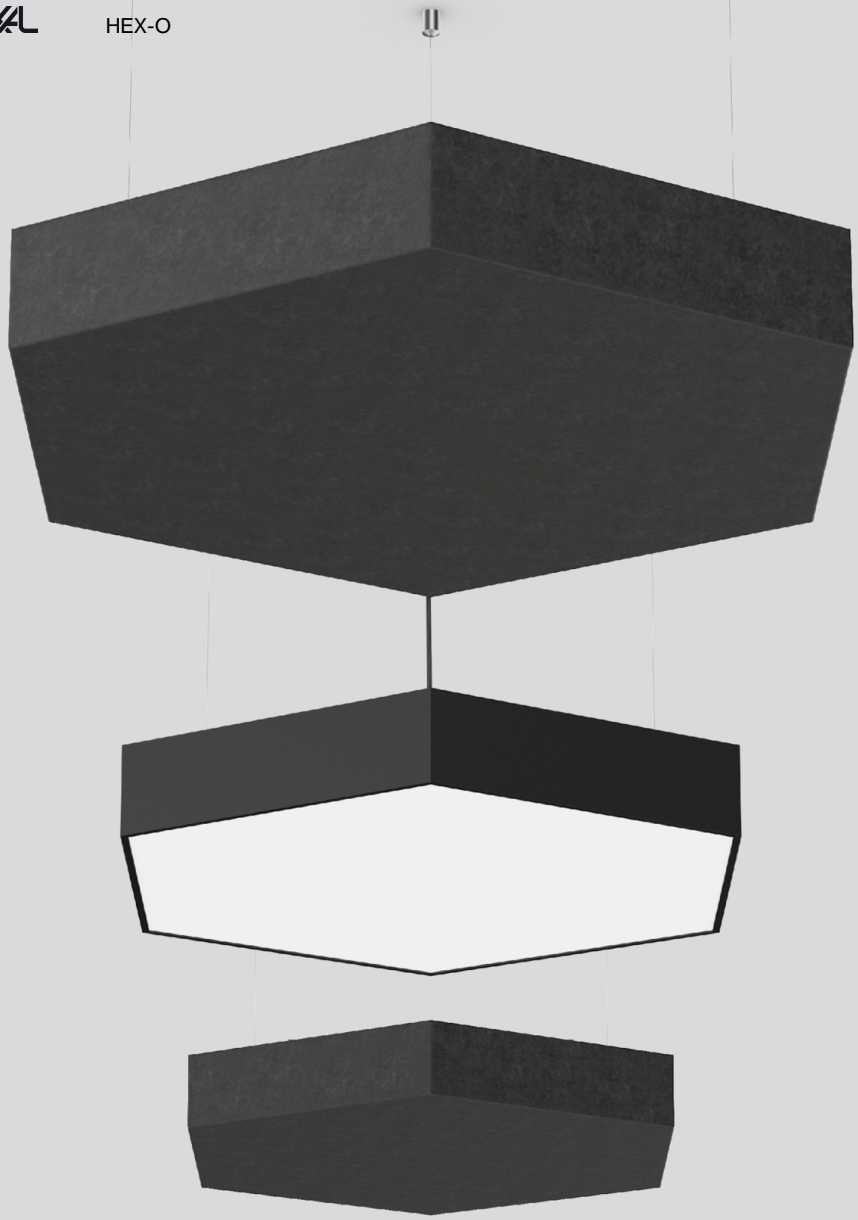

Quickinfo

3000 K, 4000 K
CRI ≥ 80 / 3 SDCM (initial MacAdam)
UGR ≤ 19, UGR ≤ 22
fino a 148 lm/W
L85 / 50000 h
Cover: Microprismatic, Opal
DALI-2
IP20

Types



Colours



Distribuzione della luce



HEX-O

suspended single + group

EN Hexagonal light housing from aluminium extruded profile, seamlessly welded; suitable for single or group installation; pendant fitting with cable suspension (single: 3 cables / group: 1 cable); height adjustment without tools; including rear rail for alignment of the housings (group); surface powder coated; can be combined with all HEX-O ceiling and TRIG-O ceiling luminaires and acoustic elements; satinised or microprismatic PMMA cover; same luminance for all size versions; canopy with 2 cable openings and plug-in terminal for through wiring, incl. feeder cable (group: both separately available); energy-efficient LEDs with very good colour rendering

IT Corpo illuminante circolare esagonale in profilo di alluminio estruso e senza punti di saldatura; adatti per montaggio singolo e a gruppi; sospeso con cavo a sospensione (single: 3 funi / group: 1 fune); regolazione altezza senza utensili; inclusi binari posteriori per l'orientamento del corpo illuminante (group); verniciatura a polvere; combinabile con tutti gli apparecchi ed elementi acustici HEX-O ceiling e TRIG-O ceiling; diffusore satinato o a microprismi in PMMA; stessa luminosità nei modelli di tutte le dimensioni; rosone con 2 ingressi cavi e morsetto per cablaggio passante e cavo di alimentazione incluso (group: entrambe da ordinare separ.); LED ad efficienza energetica con elevata resa cromatica



modular system



DIN EN 12464-1
UGR ≤ 19



wide range of colours



HEX-O 500 suspended

CRI ≥ 80 | UGR ≤ 19 | cd/m² ≤3000 | 220-240 V | DALI 1 ADDR. | X-PERT | X-PERT



OPAL | SINGLE CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
16.3 W	3000 K	2160 lm	133 lm/W	073-625153 O
	4000 K	2290 lm	140 lm/W	073-625163 O

MICROPRISMATIC | SINGLE CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
16.3 W	3000 K	1940 lm	119 lm/W	073-625153 P
	4000 K	2060 lm	126 lm/W	073-625163 P

OPAL | GROUP CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
16.3 W	3000 K	2160 lm	133 lm/W	073-635153 O
	4000 K	2290 lm	140 lm/W	073-635163 O

MICROPRISMATIC | GROUP CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
16.3 W	3000 K	1940 lm	119 lm/W	073-635153 P
	4000 K	2060 lm	126 lm/W	073-635163 P



HEX-O 750 suspended

CRI ≥ 80 | UGR ≤ 19 | cd/m² ≤3000 | 220-240 V | DALI 1 ADDR. | X-PERT | X-PERT



OPAL | SINGLE CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	3000 K	4680 lm	138 lm/W	073-626153 O
	4000 K	4960 lm	146 lm/W	073-626163 O

MICROPRISMATIC | SINGLE CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	3000 K	4210 lm	124 lm/W	073-626153 P
	4000 K	4460 lm	131 lm/W	073-626163 P

OPAL | GROUP CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	3000 K	4680 lm	138 lm/W	073-636153 O
	4000 K	4960 lm	146 lm/W	073-636163 O

Order options

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8
special colours	X

MICROPRISMATIC | GROUP CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	3000 K	4210 lm	124 lm/W	073-636153◪P
	4000 K	4460 lm	131 lm/W	073-636163◪P



HEX-O 1000 suspended

CRI ≥ 80 | UGR ≤ 19 | cd/m² ≤3000 | 220-240 V | 1 ADDR. | X-PERT | X-PERT



OPAL | SINGLE CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
65.0 W	3000 K	9110 lm	140 lm/W	073-627153◪O
	4000 K	9640 lm	148 lm/W	073-627163◪O

MICROPRISMATIC | SINGLE CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
65.0 W	3000 K	8200 lm	126 lm/W	073-627153◪P
	4000 K	8680 lm	134 lm/W	073-627163◪P

OPAL | GROUP CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
65.0 W	3000 K	9110 lm	140 lm/W	073-637153◪O
	4000 K	9640 lm	148 lm/W	073-637163◪O

MICROPRISMATIC | GROUP CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
65.0 W	3000 K	8200 lm	126 lm/W	073-637153◪P
	4000 K	8680 lm	134 lm/W	073-637163◪P

Electrical accessories

CANOPY 1500 mm

COLOUR	Ø·H (mm)	ORDER CODE
pure white	135·32	005-223241 7
jet black	135·32	005-223241 8

one per group needed; can be placed above luminaires or acoustic elements

Order options

COLOUR	◪
pure white RAL 9010	7
jet black RAL 9005	8
special colours	X

COLOUR	
marble grey	RAL 7047
felt grey	RAL 7037
limestone	RAL 070 70 20
anthracite	RAL 7021

Acoustic accessories



HEX-O ABSORBER 1000

COLOUR	L·W·H (mm)	ORDER CODE
marble grey	1000·866·237	073-691740D
felt grey	1000·866·237	073-691740G
black	1000·866·237	073-691740L
white	1000·866·237	073-691740W
acoustic special colours	1000·866·237	073-691740X
limestone	1000·866·237	073-691740S
anthracite	1000·866·237	073-691740B

only in combination with HEX-O 750, MODULE 750 or MODULE FLAT 750; for acoustic data see xal.com



HEX-O ABSORBER 750

COLOUR	L·W·H (mm)	ORDER CODE
marble grey	750·650·237	073-691640D
felt grey	750·650·237	073-691640G
black	750·650·237	073-691640L
white	750·650·237	073-691640W
acoustic special colours	750·650·237	073-691640X
limestone	750·650·237	073-691640S
anthracite	750·650·237	073-691640B

only in combination with HEX-O 500 or MODULE 500; for acoustic data see xal.com

Order options

COLOUR	
marble grey	RAL 7047
felt grey	RAL 7037
limestone	RAL 070 70 20
anthracite	RAL 7021

EANS Flight Control Centre, Harju County

Estonia

Architetto
KAMP Arhitektid

Fotografo
Tõnu Tunnel

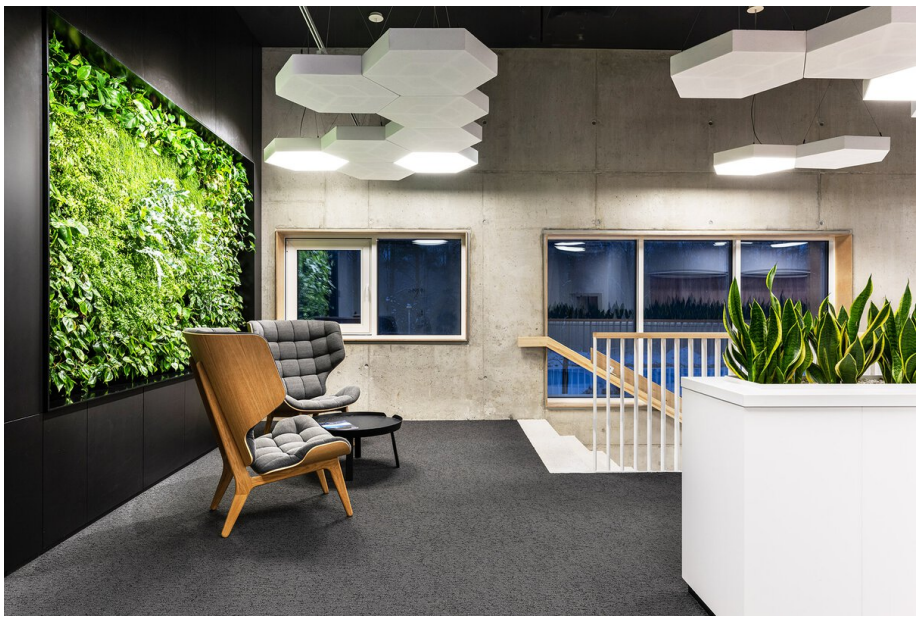

Prodotti utilizzati



HEX-O ceiling single + group



HEX-O ABSORBER ceiling / suspended



HEX-O MODULE suspended single + group



HEX-O suspended single + group



HEX-O MODULE FLAT ceiling single + group



HEX-O MODULE FLAT suspended single + group



HEX-O MODULE ceiling single + group

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com











