



## INTO

recessed


<sup>EN</sup> Square or rectangular lay-in luminaire made of sheet steel; optionally for modular ceilings 600x600 or 625x625 with visible grid system; surface powder coated; optionally two or three linear light insets made of plastic; fitted with single LED light points; good glare reduction due to recessed light point plane; despite this increased efficiency through special lens technology; inserted lenses with wide flood radiation characteristic; or high quality reflector with micro-faceted, aluminum-vaporised surface; or with specially computed wide beam lenses; precise radiation characteristic with symmetrical light distribution; exchangeable light insets; incl. converter, suitable for through-wiring; plug and play connection cables between light insets and converter with plug/socket system; energy-efficient LEDs with very good colour rendering

Apparecchio quadrato o rettangolare da incasso in lamiera d'acciaio; a scelta per controsoffitti modulari 600 x 600 o 625 x 625 con sistema di supporto a griglia visibile; verniciatura a polvere; a scelta due o tre inserti luminosi lineari in plastica; dotato di singoli punti luce a LED; ottima schermatura con superficie di emissione arretrata; comunque maggiore efficienza con la speciale tecnologia delle lenti; lenti con emissione wide flood; o riflettore di alta qualità con superficie a microfacette e vaporizzata in alluminio; o dotati di lenti wide beam appositamente tarate; caratteristica di emissione precisa con distribuzione simmetrica della luce; inserti luminosi intercambiabili; incl. convertitore, adatto per il cablaggio passante; cavi di collegamento preassemblati tra gli inserti luminosi e il convertitore con sistema a spina/presa; LED ad efficienza energetica con elevata resa cromatica

### Quickinfo

3000 K, 4000 K, tunable white  
2700 - 6500 K  
CRI  $\geq$  80, CRI  $\geq$  90 / 3 SDCM  
(initial MacAdam)  
UGR  $\leq$  16, UGR  $\leq$  19  
fino a 177 lm/W  
L90 / 100000 h, L90 / 50000 h  
DALI-2  
IP20

### Types

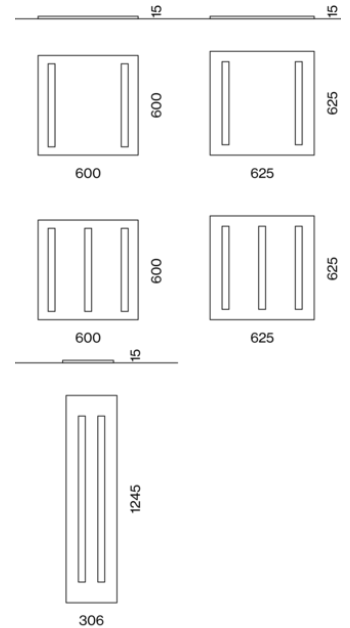

### Colore



### Inserto



### Distribuzione della luce



suitable for grid ceilings




easy mounting




up to 177 lm/W  
(high efficiency)



DIN EN 12464-1  
UGR  $\leq$  19





### INTO 600 2 reflectors recessed




#### SUPER WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
20.0 W	3000 K	80	3250 lm	163 lm/W	0 6 4 - 5 1 0 0 5 3 7 ■ X
		90	2830 lm	142 lm/W	0 6 4 - 5 1 0 0 0 3 7 ■ X
	4000 K	80	3460 lm	173 lm/W	0 6 4 - 5 1 0 0 6 3 7 ■ X
		90	2830 lm	142 lm/W	0 6 4 - 5 1 0 0 1 3 7 ■ X
26.7 W	tunable w.	90	3240 lm	121 lm/W	0 6 4 - 5 1 0 0 D 3 7 ■ X





### INTO 600 3 reflectors recessed




#### SUPER WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
29.3 W	3000 K	80	4870 lm	166 lm/W	0 6 4 - 5 1 0 1 5 3 7 ■ X
		90	4240 lm	145 lm/W	0 6 4 - 5 1 0 1 0 3 7 ■ X
	4000 K	80	5190 lm	177 lm/W	0 6 4 - 5 1 0 1 6 3 7 ■ X
		90	4240 lm	145 lm/W	0 6 4 - 5 1 0 1 1 3 7 ■ X
39.0 W	tunable w.	90	4860 lm	125 lm/W	0 6 4 - 5 1 0 1 D 3 7 ■ X




### INTO 625 2 reflectors recessed




#### SUPER WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
20.0 W	3000 K	80	3250 lm	163 lm/W	0 6 4 - 5 1 1 0 5 3 7 ■ X
		90	2830 lm	142 lm/W	0 6 4 - 5 1 1 0 0 3 7 ■ X
	4000 K	80	3460 lm	173 lm/W	0 6 4 - 5 1 1 0 6 3 7 ■ X
		90	2830 lm	142 lm/W	0 6 4 - 5 1 1 0 1 3 7 ■ X
26.7 W	tunable w.	90	3240 lm	121 lm/W	0 6 4 - 5 1 1 0 D 3 7 ■ X





#### Order options

INSET	INSET	
black	B	4
chrome	R	7
		traffic white RAL 9016
		jet black RAL 9005
		gold
		8
		9




### INTO 625 3 reflectors recessed




#### SUPER WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
29.3 W	3000 K	80	4870 lm	166 lm/W	0 6 4 - 5 1 1 1 5 3 7 ■ X
		90	4240 lm	145 lm/W	0 6 4 - 5 1 1 1 0 3 7 ■ X
39.0 W	4000 K	80	5190 lm	177 lm/W	0 6 4 - 5 1 1 1 6 3 7 ■ X
		90	4240 lm	145 lm/W	0 6 4 - 5 1 1 1 1 3 7 ■ X
	tunable w.	90	4860 lm	125 lm/W	0 6 4 - 5 1 1 1 D 3 7 ■ X




### INTO 1250 reflector recessed





#### SUPER WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
39.0 W	3000 K	80	6500 lm	167 lm/W	0 6 4 - 5 1 2 0 5 3 7 ■ X
		90	5660 lm	145 lm/W	0 6 4 - 5 1 2 0 0 3 7 ■ X
51.0 W	4000 K	80	6920 lm	177 lm/W	0 6 4 - 5 1 2 0 6 3 7 ■ X
		90	5660 lm	145 lm/W	0 6 4 - 5 1 2 0 1 3 7 ■ X
	tunable w.	90	6490 lm	127 lm/W	0 6 4 - 5 1 2 0 D 3 7 ■ X



### INTO 600 2 spotlines recessed




#### WIDE FLOOD traffic white, DALI-2



SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
25.1 W	3000 K	80	3920 lm	156 lm/W	0 6 4 - 5 2 0 0 5 3 7 ■ W
		90	3410 lm	136 lm/W	0 6 4 - 5 2 0 0 0 3 7 ■ W
26.7 W	4000 K	80	4170 lm	166 lm/W	0 6 4 - 5 2 0 0 6 3 7 ■ W
		90	3410 lm	136 lm/W	0 6 4 - 5 2 0 0 1 3 7 ■ W
	tunable w.	90	3110 lm	116 lm/W	0 6 4 - 5 2 0 0 D 3 7 ■ W

#### Order options

INSET	INSET
black	chrome
chrome	traffic white RAL 9016
	jet black RAL 9005
	gold




### INTO 600 3 spotlines recessed





#### WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
37.0 W	3000 K	80	5880 lm	159 lm/W	0 6 4 - 5 2 0 1 5 3 7 ■,W
		90	5120 lm	138 lm/W	0 6 4 - 5 2 0 1 0 3 7 ■,W
	4000 K	80	6260 lm	169 lm/W	0 6 4 - 5 2 0 1 6 3 7 ■,W
39.0 W		90	5120 lm	138 lm/W	0 6 4 - 5 2 0 1 1 3 7 ■,W
	tunable w.	90	4660 lm	119 lm/W	0 6 4 - 5 2 0 1 D 3 7 ■,W




### INTO 625 2 spotlines recessed





#### WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
25.1 W	3000 K	80	3920 lm	156 lm/W	0 6 4 - 5 2 1 0 5 3 7 ■,W
		90	3410 lm	136 lm/W	0 6 4 - 5 2 1 0 0 3 7 ■,W
	4000 K	80	4170 lm	166 lm/W	0 6 4 - 5 2 1 0 6 3 7 ■,W
26.7 W		90	3410 lm	136 lm/W	0 6 4 - 5 2 1 0 1 3 7 ■,W
	tunable w.	90	3110 lm	116 lm/W	0 6 4 - 5 2 1 0 D 3 7 ■,W



### INTO 625 3 spotlines recessed





#### WIDE FLOOD traffic white, DALI-2


SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
37.0 W	3000 K	80	5880 lm	159 lm/W	0 6 4 - 5 2 1 1 5 3 7 ■,W
		90	5120 lm	138 lm/W	0 6 4 - 5 2 1 1 0 3 7 ■,W
	4000 K	80	6260 lm	169 lm/W	0 6 4 - 5 2 1 1 6 3 7 ■,W
39.0 W		90	5120 lm	138 lm/W	0 6 4 - 5 2 1 1 1 3 7 ■,W
	tunable w.	90	4660 lm	119 lm/W	0 6 4 - 5 2 1 1 D 3 7 ■,W

#### Order options

INSET	INSET	
black	B	4
chrome	R	7
		traffic white RAL 9016
		jet black RAL 9005
		gold
		8
		9





### INTO 1250 spotline recessed



#### WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
47.0 W	3000 K	80	7480 lm	159 lm/W	0 6 4 - 5 2 2 0 5 3 7 <span style="color:blue">■</span> W
		90	6510 lm	139 lm/W	0 6 4 - 5 2 2 0 0 3 7 <span style="color:blue">■</span> W
51.0 W	4000 K	80	7960 lm	169 lm/W	0 6 4 - 5 2 2 0 6 3 7 <span style="color:blue">■</span> W
		90	6510 lm	139 lm/W	0 6 4 - 5 2 2 0 1 3 7 <span style="color:blue">■</span> W
	tunable w.	90	6210 lm	122 lm/W	0 6 4 - 5 2 2 0 D 3 7 <span style="color:blue">■</span> W





### INTO 600 2 lenses recessed



#### WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
25.9 W	3000 K	80	4210 lm	163 lm/W	0 6 4 - 5 3 0 0 5 3 7 0 W
		90	3670 lm	142 lm/W	0 6 4 - 5 3 0 0 0 3 7 0 W
	4000 K	80	4480 lm	173 lm/W	0 6 4 - 5 3 0 0 6 3 7 0 W
		90	3670 lm	142 lm/W	0 6 4 - 5 3 0 0 1 3 7 0 W



### INTO 600 3 lenses recessed




#### WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
38.0 W	3000 K	80	6320 lm	166 lm/W	0 6 4 - 5 3 0 1 5 3 7 0 W
		90	5500 lm	145 lm/W	0 6 4 - 5 3 0 1 0 3 7 0 W
	4000 K	80	6720 lm	177 lm/W	0 6 4 - 5 3 0 1 6 3 7 0 W
		90	5500 lm	145 lm/W	0 6 4 - 5 3 0 1 1 3 7 0 W

#### Order options

INSET	INSET
black	chrome <span style="color:blue">■</span>
chrome	traffic white RAL 9016 <span style="color:blue">■</span>
	jet black RAL 9005 <span style="color:blue">■</span>
	gold <span style="color:blue">■</span>





### INTO 625 2 lenses recessed



#### WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
25.9 W	3000 K	80	4210 lm	163 lm/W	0 6 4 - 5 3 1 0 5 3 7 0 W
		90	3670 lm	142 lm/W	0 6 4 - 5 3 1 0 0 3 7 0 W
	4000 K	80	4480 lm	173 lm/W	0 6 4 - 5 3 1 0 6 3 7 0 W
		90	3670 lm	142 lm/W	0 6 4 - 5 3 1 0 1 3 7 0 W





### INTO 625 3 lenses recessed



#### WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
38.0 W	3000 K	80	6320 lm	166 lm/W	0 6 4 - 5 3 1 1 5 3 7 0 W
		90	5500 lm	145 lm/W	0 6 4 - 5 3 1 1 0 3 7 0 W
	4000 K	80	6720 lm	177 lm/W	0 6 4 - 5 3 1 1 6 3 7 0 W
		90	5500 lm	145 lm/W	0 6 4 - 5 3 1 1 1 3 7 0 W




### INTO 1250 lens recessed



#### WIDE FLOOD traffic white, DALI-2

SYSTEM	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
49.0 W	3000 K	80	8140 lm	166 lm/W	0 6 4 - 5 3 2 0 5 3 7 0 W
		90	7090 lm	145 lm/W	0 6 4 - 5 3 2 0 0 3 7 0 W
	4000 K	80	8660 lm	177 lm/W	0 6 4 - 5 3 2 0 6 3 7 0 W
		90	7090 lm	145 lm/W	0 6 4 - 5 3 2 0 1 3 7 0 W



#### Order options

INSET	INSET	
black	B	chrome
chrome	R	traffic white RAL 9016
		jet black RAL 9005
		gold