



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
UGR ≤ 10, UGR ≤ 16, UGR ≤ 19, UGR ≤ 22, UGR ≤ 25
fino a 127 lm/W
L90 / 50000 h
DALI-2, non DIM
front IP20

Types



Colours



Set di montaggio



Distribuzione della luce




UNICO L2 / L3

recessed

EN Rectangular recessed multi-downlight made of die-cast aluminium; equipped with two (L2) / three (L3) individually selectable or pre-specified, customised light elements; installation without tools in mounting set with ball catch system; easy electrical installation by means of reverse polarity protected plug-in connections; suitable for ceiling thickness of 2-25 mm; surface powder coated; installation possible in different housings; high quality reflector with microfaceted, aluminium-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering

IT Downlight multiplo rettangolare da incasso in alluminio pressofuso; dotata di due (L2) / tre (L3) lenti selezionabili individualmente o definite per applicazioni specifiche; set di fissaggio con cuscinetto a sfera, senza bisogno di utensili; montaggio elettrico semplice grazie a collegamenti a spina a prova di polarizzazione inversa; per soffitti di spessore 2-25 mm; verniciatura a polvere; incasso possibile in vari telai; riflettore di alta qualità con superficie a microfaccette e vaporizzata in alluminio; emissione precisa con diversi fasci luminosi simmetrici; o con distribuzione asimmetrica della luce; LED high power a risparmio energetico con ottima resa cromatica



black & chrome reflector




one luminaire multiple scenes



up to 145 lm/W (high efficiency)



tunable white 2700 – 5000 K (optional)







UNICO L2

CRI ≥ 90 | 2 SDCM | UGR ≤ 10 | cd/m² ≤ 1500 | 1 ADDR. | X-PERT | X-PERT

SPOT ROUND 19°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	626 lm	101 lm/W	090-7L29 ⇕ K0◪41
	3000 K	626 lm	101 lm/W	090-7L20 ⇕ K0◪41
	3500 K	652 lm	105 lm/W	090-7L22 ⇕ K0◪41
	4000 K	665 lm	107 lm/W	090-7L21 ⇕ K0◪41

MEDIUM ROUND 34°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	676 lm	109 lm/W	090-7L29 ⇕ B0◪41
	3000 K	676 lm	109 lm/W	090-7L20 ⇕ B0◪41
	3500 K	705 lm	114 lm/W	090-7L22 ⇕ B0◪41
	4000 K	719 lm	116 lm/W	090-7L21 ⇕ B0◪41

FLOOD ROUND 47°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	723 lm	117 lm/W	090-7L29 ⇕ C0◪41
	3000 K	723 lm	117 lm/W	090-7L20 ⇕ C0◪41
	3500 K	753 lm	121 lm/W	090-7L22 ⇕ C0◪41
	4000 K	768 lm	124 lm/W	090-7L21 ⇕ C0◪41

WIDE FLOOD ROUND 67°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	734 lm	118 lm/W	090-7L29 ⇕ D0◪41
	3000 K	734 lm	118 lm/W	090-7L20 ⇕ D0◪41
	3500 K	764 lm	123 lm/W	090-7L22 ⇕ D0◪41
	4000 K	780 lm	126 lm/W	090-7L21 ⇕ D0◪41

MEDIUM SQUARE 32°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	659 lm	106 lm/W	090-7L29 ⇕ E0◪41
	3000 K	659 lm	106 lm/W	090-7L20 ⇕ E0◪41
	3500 K	686 lm	111 lm/W	090-7L22 ⇕ E0◪41
	4000 K	700 lm	113 lm/W	090-7L21 ⇕ E0◪41

Order options

CONTROL ⇕		COLOUR ◪	
non DIM	1	chrome reflector	0
DALI-2	3	black reflector	B

FLOOD SQUARE 55°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	735 lm	119 lm/W	090-7L29 F0 41
	3000 K	735 lm	119 lm/W	090-7L20 F0 41
	3500 K	766 lm	124 lm/W	090-7L22 F0 41
	4000 K	781 lm	126 lm/W	090-7L21 F0 41

RECTANGULAR MEDIUM 31°x67°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	708 lm	114 lm/W	090-7L29 R0 41
	3000 K	708 lm	114 lm/W	090-7L20 R0 41
	3500 K	738 lm	119 lm/W	090-7L22 R0 41
	4000 K	752 lm	121 lm/W	090-7L21 R0 41

WIDE FLOOD SQUARE 70°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	740 lm	119 lm/W	090-7L29 G0 41
	3000 K	740 lm	119 lm/W	090-7L20 G0 41
	3500 K	771 lm	124 lm/W	090-7L22 G0 41
	4000 K	786 lm	127 lm/W	090-7L21 G0 41

WALLWASHER chrome reflector, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	570 lm	92 lm/W	090-7L29 A0 42
	3000 K	570 lm	92 lm/W	090-7L20 A0 42
	3500 K	594 lm	96 lm/W	090-7L22 A0 42
	4000 K	606 lm	98 lm/W	090-7L21 A0 42

WALL FLOOR CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	671 lm	108 lm/W	090-7L29 W0 42
	3000 K	671 lm	108 lm/W	090-7L20 W0 42
	3500 K	699 lm	113 lm/W	090-7L22 W0 42
	4000 K	713 lm	115 lm/W	090-7L21 W0 42

Order options

CONTROL		COLOUR		COLOUR	
non DIM	1	chrome reflector	0	jet black	RAL 9005
DALI-2	3	black reflector	B	traffic white	RAL 9016







UNICO L3



MEDIUM ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39◆B0◪41
	3000 K	lm	090-7L30◆B0◪41
	3500 K	lm	090-7L32◆B0◪41
	4000 K	lm	090-7L31◆B0◪41

FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39◆C0◪41
	3000 K	lm	090-7L30◆C0◪41
	3500 K	lm	090-7L32◆C0◪41
	4000 K	lm	090-7L31◆C0◪41

WIDE FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39◆D0◪41
	3000 K	lm	090-7L30◆D0◪41
	3500 K	lm	090-7L32◆D0◪41
	4000 K	lm	090-7L31◆D0◪41

SPOT ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39◆K0◪41
	3000 K	lm	090-7L30◆K0◪41
	3500 K	lm	090-7L32◆K0◪41
	4000 K	lm	090-7L31◆K0◪41

MEDIUM SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39◆E0◪41
	3000 K	lm	090-7L30◆E0◪41
	3500 K	lm	090-7L32◆E0◪41
	4000 K	lm	090-7L31◆E0◪41

Order options

CONTROL ◆		COLOUR ◪	
non DIM	1	chrome reflector	0
DALI-2	3	black reflector	B

FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39 ⇕ F0 ◪ 41
	3000 K	lm	090-7L30 ⇕ F0 ◪ 41
	3500 K	lm	090-7L32 ⇕ F0 ◪ 41
	4000 K	lm	090-7L31 ⇕ F0 ◪ 41


WIDE FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39 ⇕ G0 ◪ 41
	3000 K	lm	090-7L30 ⇕ G0 ◪ 41
	3500 K	lm	090-7L32 ⇕ G0 ◪ 41
	4000 K	lm	090-7L31 ⇕ G0 ◪ 41

WALLWASHER chrome reflector, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	856 lm	090-7L39 ⇕ A0041
	3000 K	856 lm	090-7L30 ⇕ A0041
	3500 K	891 lm	090-7L32 ⇕ A0041
	4000 K	909 lm	090-7L31 ⇕ A0041

Electrical mounting accessories (optional)




THROUGH WIRING CONNECTION BOX

TYPE	L·W·H (mm)	ORDER CODE
non DIM cable ø 4 – 12 mm	105·58·30	005-253 1110
DALI cable ø 4 – 12 mm	105·58·30	005-255 1110

Linect®-Ready


Mounting accessories (required)



MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L·W·H (mm)	ORDER CODE
12.5/15/20/25 mm	85·47·47	090-7L20100

for UNICO L2 and UNICO wall recessed 1 lamp



MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L·W·H (mm)	ORDER CODE
12.5/15/20/25 mm	122·47·47	090-7L30100

for UNICO L3

Order options

CONTROL	⇕	COLOUR	◪	COLOUR	
non DIM	1	chrome reflector	0	jet black	RAL 9005
DALI-2	3	black reflector	B	traffic white	RAL 9016



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L·W·H (mm)	ORDER CODE
jet black	101·63·30	090-7L2020B
traffic white	101·63·30	090-7L2020W

for UNICO L2 and UNICO wall recessed 1 lamp



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L·W·H (mm)	ORDER CODE
jet black	138·63·30	090-7L3020B
traffic white	138·63·30	090-7L3020W


for UNICO L3

Mounting tools accessories (optional)

DISMOUNTING TOOL

L·W·H (mm)	ORDER CODE
70·30·2	090-002100

Electrical accessories (optional)



POWER SUPPLY pre-wired

Available in the configurator — see POWER SUPPLY PRE-WIRED

Order options

COLOUR

jet black	RAL 9005
traffic white	RAL 9016

Benaki Museum Shop, Navarino AgoraBenaki Museum Shop, Athens

Grecia

Architetto
STUDIOLAV and
Kostantia Manthou

Fotografo
Manos Chatzikonstantis



Prodotti utilizzati



UNICO L2 / L3
recessed

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com


NELLY'S
NELLY'S







BENAKI
MUSEUM
SHOP

Forschungsbau Weltbeziehungen Universität Erfurt

Germania

Lighting Design
lichtraum

Fotografo
Steven Neukirch
Fotografie

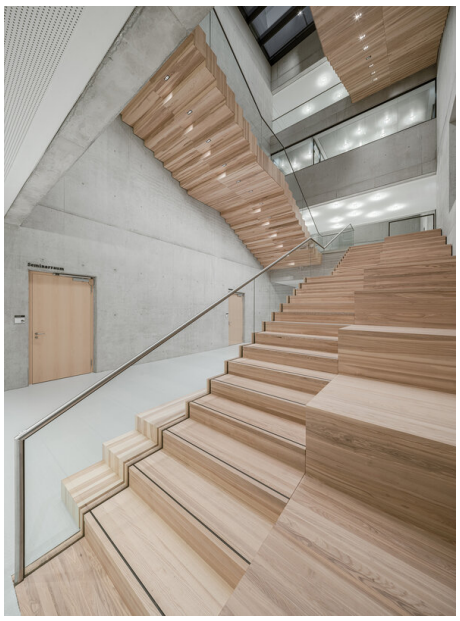

Prodotti utilizzati





LENO surface



UNICO L2 / L3 recessed

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

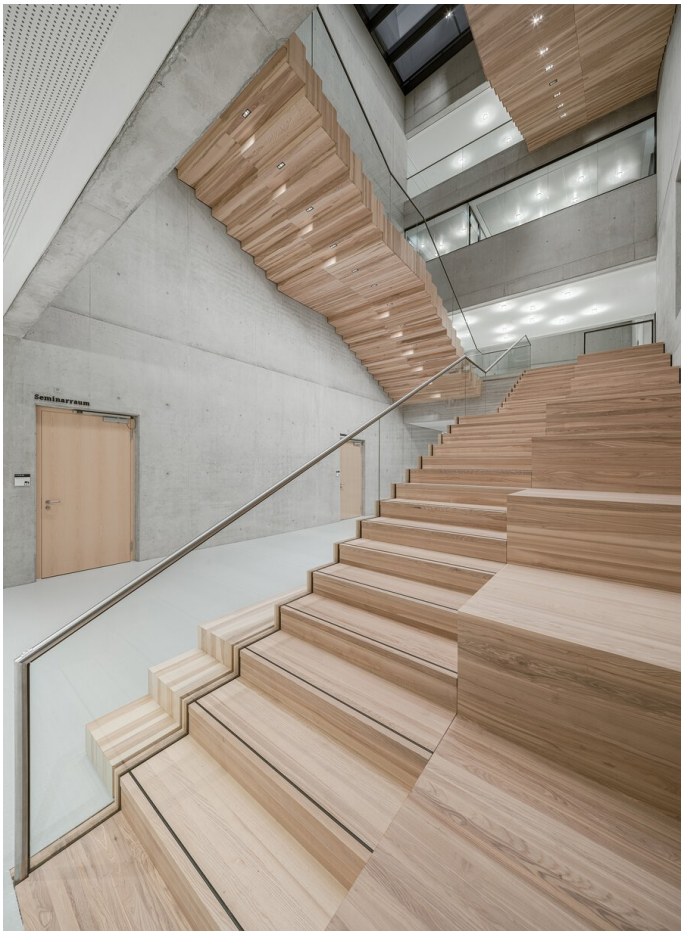
Seminarraum

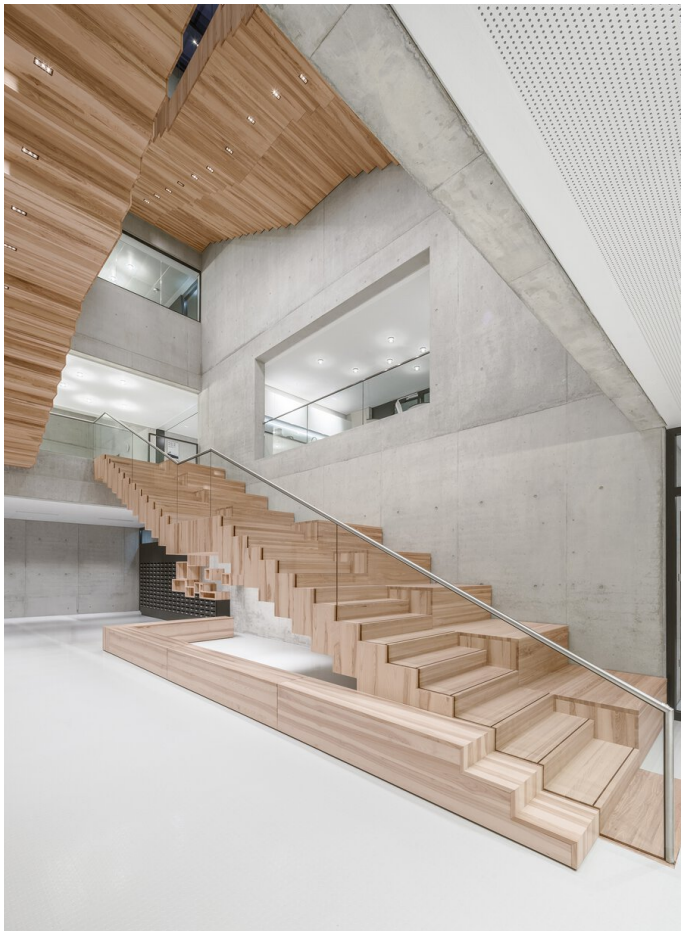




Beratungsraum 02.46
Meeting Room