


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
L80 / 75000 h
DALI-2, non DIM
IP20

Types



Colours



Riflettore



Distribuzione della luce






UNICO L2 / L3

ceiling

EN Rectangular surface mounted multi-downlight made of aluminium; equipped with two (L2) / three (L3) individually selectable or prespecified, customised light elements; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface powder coated; high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering

IT Downlight multiplo rettangolare in alluminio con montaggio a superficie; dotata di due (L2) / tre (L3) lenti selezionabili individualmente o definite per applicazioni specifiche; corpo illuminante montabile ad appoggio senza attrezzi su piastra di montaggio tramite blocco di sicurezza; convertitore integrato nel corpo illuminante; verniciatura a polvere; riflettore di alta qualità con superficie a microfaccette e vaporizzata in alluminio; emissione precisa con diversi fasci luminosi simmetrici; o con distribuzione asimmetrica della luce; LED high power a risparmio energetico con ottima resa cromatica




black & chrome reflector



one luminaire multiple scenes





UNICO L2 ceiling

CRI ≥ 90 · 2 SDCM · 1 ADDR. · X-PERT · X-PERT

MEDIUM ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.8 W	2700 K	lm	0 9 0 - 1 L 2 9 ◆ B ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 2 0 ◆ B ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 2 2 ◆ B ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 2 1 ◆ B ◪ ■ 2 1

FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.8 W	2700 K	lm	0 9 0 - 1 L 2 9 ◆ C ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 2 0 ◆ C ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 2 2 ◆ C ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 2 1 ◆ C ◪ ■ 2 1

WIDE FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.8 W	2700 K	lm	0 9 0 - 1 L 2 9 ◆ D ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 2 0 ◆ D ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 2 2 ◆ D ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 2 1 ◆ D ◪ ■ 2 1

SPOT ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.8 W	2700 K	lm	0 9 0 - 1 L 2 9 ◆ K ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 2 0 ◆ K ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 2 2 ◆ K ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 2 1 ◆ K ◪ ■ 2 1

MEDIUM SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.8 W	2700 K	lm	0 9 0 - 1 L 2 9 ◆ E ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 2 0 ◆ E ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 2 2 ◆ E ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 2 1 ◆ E ◪ ■ 2 1

FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.8 W	2700 K	lm	0 9 0 - 1 L 2 9 ◆ F ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 2 0 ◆ F ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 2 2 ◆ F ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 2 1 ◆ F ◪ ■ 2 1

Order options

CONTROL ◆		COLOUR ◪		REFLECTOR ■	
non DIM	1	jet black RAL 9005	B	chrome	0
DALI-2	3	white aluminium RAL 9006	G	black	B
		traffic white RAL 9016	W		

WIDE FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.8 W	2700 K	lm	0 9 0 - 1 L 2 9 ⇕ G ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 2 0 ⇕ G ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 2 2 ⇕ G ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 2 1 ⇕ G ◪ ■ 2 1

RECTANGULAR MEDIUM CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.8 W	2700 K	lm	0 9 0 - 1 L 2 9 ⇕ R ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 2 0 ⇕ R ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 2 2 ⇕ R ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 2 1 ⇕ R ◪ ■ 2 1

WALLWASHER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.8 W	2700 K	563 lm	0 9 0 - 1 L 2 9 ⇕ A ◪ 0 2 1
	3000 K	563 lm	0 9 0 - 1 L 2 0 ⇕ A ◪ 0 2 1
	3500 K	586 lm	0 9 0 - 1 L 2 2 ⇕ A ◪ 0 2 1
	4000 K	598 lm	0 9 0 - 1 L 2 1 ⇕ A ◪ 0 2 1

FLOOR/WALL + FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.8 W	2700 K	662 lm	0 9 0 - 1 L 2 9 ⇕ W ◪ ■ 2 1
	3000 K	662 lm	0 9 0 - 1 L 2 0 ⇕ W ◪ ■ 2 1
	3500 K	689 lm	0 9 0 - 1 L 2 2 ⇕ W ◪ ■ 2 1
	4000 K	703 lm	0 9 0 - 1 L 2 1 ⇕ W ◪ ■ 2 1


WALL FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.8 W	2700 K	662 lm	0 9 0 - 1 L 2 9 ⇕ W ◪ ■ 2 2
	3000 K	662 lm	0 9 0 - 1 L 2 0 ⇕ W ◪ ■ 2 2
	3500 K	689 lm	0 9 0 - 1 L 2 2 ⇕ W ◪ ■ 2 2
	4000 K	703 lm	0 9 0 - 1 L 2 1 ⇕ W ◪ ■ 2 2

Order options

CONTROL ⇕		COLOUR ◪		REFLECTOR ■	
non DIM	1	jet black RAL 9005	B	chrome	0
DALI-2	3	white aluminium RAL 9006	G	black	B
		traffic white RAL 9016	W		





UNICO L3 ceiling

CRI ≥ 90 · 2 SDCM · 1 ADDR. · X-PERT · X-PERT

MEDIUM ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.2 W	2700 K	lm	0 9 0 - 1 L 3 9 ◆ B ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 3 0 ◆ B ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 3 2 ◆ B ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 3 1 ◆ B ◪ ■ 2 1

FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.2 W	2700 K	lm	0 9 0 - 1 L 3 9 ◆ C ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 3 0 ◆ C ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 3 2 ◆ C ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 3 1 ◆ C ◪ ■ 2 1

WIDE FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.2 W	2700 K	lm	0 9 0 - 1 L 3 9 ◆ D ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 3 0 ◆ D ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 3 2 ◆ D ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 3 1 ◆ D ◪ ■ 2 1

SPOT ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.2 W	2700 K	lm	0 9 0 - 1 L 3 9 ◆ K ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 3 0 ◆ K ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 3 2 ◆ K ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 3 1 ◆ K ◪ ■ 2 1

MEDIUM SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.2 W	2700 K	lm	0 9 0 - 1 L 3 9 ◆ E ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 3 0 ◆ E ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 3 2 ◆ E ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 3 1 ◆ E ◪ ■ 2 1

FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.2 W	2700 K	lm	0 9 0 - 1 L 3 9 ◆ F ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 3 0 ◆ F ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 3 2 ◆ F ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 3 1 ◆ F ◪ ■ 2 1

Order options

CONTROL ◆		COLOUR ◪		REFLECTOR ■	
non DIM	1	jet black RAL 9005	B	chrome	0
DALI-2	3	white aluminium RAL 9006	G	black	B
		traffic white RAL 9016	W		

WIDE FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.2 W	2700 K	lm	0 9 0 - 1 L 3 9 ⇕ G ◪ ■ 2 1
	3000 K	lm	0 9 0 - 1 L 3 0 ⇕ G ◪ ■ 2 1
	3500 K	lm	0 9 0 - 1 L 3 2 ⇕ G ◪ ■ 2 1
	4000 K	lm	0 9 0 - 1 L 3 1 ⇕ G ◪ ■ 2 1

WALLWASHER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.2 W	2700 K	844 lm	0 9 0 - 1 L 3 9 ⇕ A ◪ 0 2 1
	3000 K	844 lm	0 9 0 - 1 L 3 0 ⇕ A ◪ 0 2 1
	3500 K	879 lm	0 9 0 - 1 L 3 2 ⇕ A ◪ 0 2 1
	4000 K	897 lm	0 9 0 - 1 L 3 1 ⇕ A ◪ 0 2 1

Order options


CONTROL ⇕		COLOUR ◪		REFLECTOR ■	
non DIM	1	jet black RAL 9005	B	chrome	0
DALI-2	3	white aluminium RAL 9006	G	black	B
		traffic white RAL 9016	W		

Office S3 Architecten, Mechelen

Belgio

Architetto
S3 Architecten

Fotografo
Kris Dekeijser

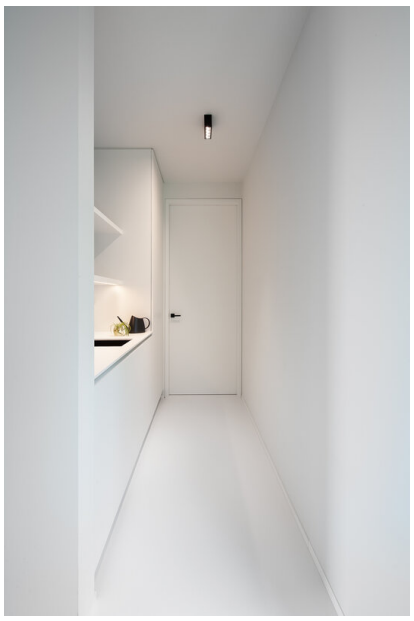

Prodotti utilizzati



MOVE IT 25 surface / suspended system



JUST 45 MOVE IT 25 / 25 S / 45



SPOTLINE MOVE IT 25



TULA suspended



MOVE IT 45 surface / suspended system



L10 OFFICE MOVE IT 45




UNICO L2 / L3 ceiling



UNICO L4 / L6 ceiling

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com



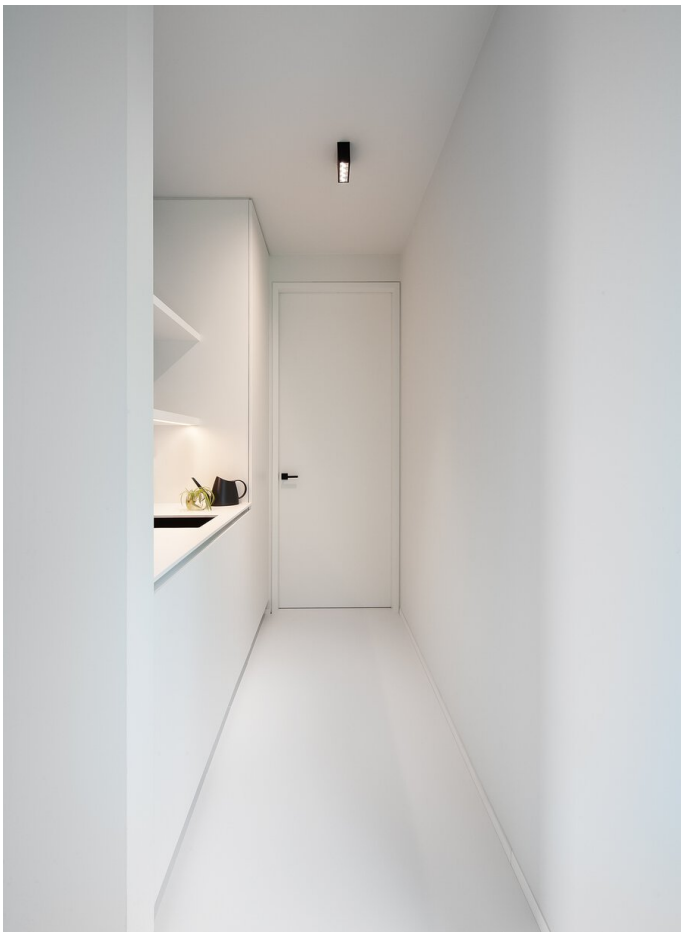








S3a





