



SIVERA 25

acoustic suspended


EN Flexible mounting system for suspending multiple baffles and luminaires; consisting of aluminium profiles, rotatable and movable mounting clips made from 3D printing and acoustic elements made of 25 mm thick, high quality, self-supporting, at least 50 % recycled PET felt with sound absorbing properties; high quality visual and tactile surface; linear light inset made of plastic in extruded aluminium profile; surface powder coated; high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with symmetrical light distribution; converter integrated into the module; incl. feeder cable, optionally with 3-phase adapter; distance between the baffles or luminaires freely selectable; pendant fitting with cable suspension; toolless suspension height adjustment on the profile; can be extended as required via linear connector; optional: MOVE IT PRO track can be integrated using accessories

DE Flexibles Montagesystem zur Abhängung mehrerer Baffles und Leuchten; bestehend aus Aluminiumprofilen, dreh- und verschiebbaren Montageclips aus 3D-Druck und Akustik-elementen aus 25 mm starkem, hochwertigem, selbsttragendem, mind. 50 % recyceltem PET-Filz mit schallabsorbierenden Eigenschaften; optisch und haptisch hochwertige Oberfläche; linearer Lichteinsatz aus Kunststoff im Aluminiumstrangpressprofil; Oberfläche pulverbeschichtet; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; präzise Abstrahlcharakteristik mit symmetrischer Lichtverteilung; Konverter im Modul integriert; inkl. Einspeiseleitung, wahlweise mit 3-Phasenadapter; Abstand zwischen den Baffles bzw. Leuchten frei wählbar; abgependelt mit Seilabhängung; werkzeuglose Höhenverstellung am Profil; mittels Linearverbinder beliebig erweiterbar; optional: MOVE IT PRO track mittels Zubehör integrierbar

Quickinfo

slim baffle system
high acoustic performance
🔥 flame retardant version available

Types

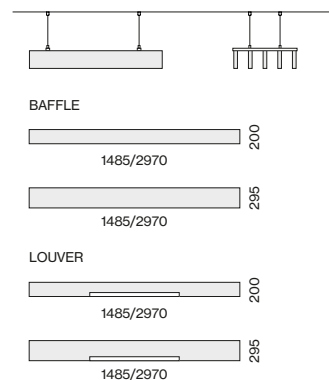


Customisable options

height
length
baffle shapes
colour


Colours



combinable with
XAL products



slim width
25 mm



modular
system

Order options

FEEDER CABLE

open end*	2
with 3-phase track adapter**	3

* for canopy: 2000 mm feeder cable

** STUCCHI adapt.: 1500 mm feeder c.

BAFFLE HEIGHT

200 mm	1
295 mm	2

COLOUR TEMPERATURE

3000K	5
4000K	6

CONTROL

DALI-2	
--------	--

ACOUSTIC COLOUR

☐ white	W
☐ marble grey	D
☐ anthracite	B
☐ black	L
☐ limestone	S
☐ felt grey	G

MATERIAL COLOUR LUMINAIRE


☐ pure white RAL9010	7
☐ jet black RAL9005	8

LIGHT OPTIC



louver wide flood	
-------------------	--

Customised shapes

BAFFLE SHAPES examples

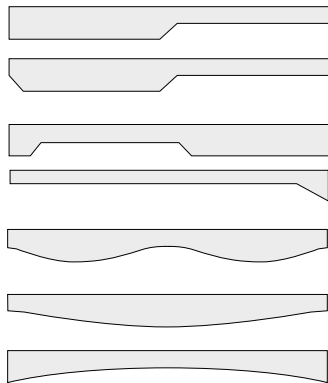

SIVERA 25 acoustic suspended



A	B	C	D	E
$\alpha_w 0.7$				

0.70
NRC

0.73
SAA

BAFFLE



L-H (mm)

1485-200
1485-295
2970-200
2970-295

ORDER CODE

091-401211
091-402211
091-401411
091-402411

SIVERA 25 acoustic suspended



A	B	C	D	E
$\alpha_w 0.7$				

0.70
NRC

0.73
SAA


LOUVER

SYS. POWER	L BAFFLE (mm)	L INSET (mm)	COLOUR TEMP.	LUM. FLUX	ORDER CODE
10.7 W	1485	1000	3000K	1520lm	091-4H0:3
			4000K	1730lm	
10.7 W	2970	1000	3000K	1520lm	091-4H1:3
			4000K	1730lm	
20.6 W	2970	2000	3000K	3050lm	091-4H3:3
			4000K	3470lm	
27.5 W	2970	2750	3000K	4070lm	091-4H4:3
			4000K	4630lm	




Acoustic data

SOUND ABSORPTION COEFFICIENT (α_p)

TYPE	125	250	500	1000	2000	4000 HZ
200	0.05	0.15	0.45	0.80	1.00	1.00
295	0.05	0.15	0.45	0.80	1.00	1.00

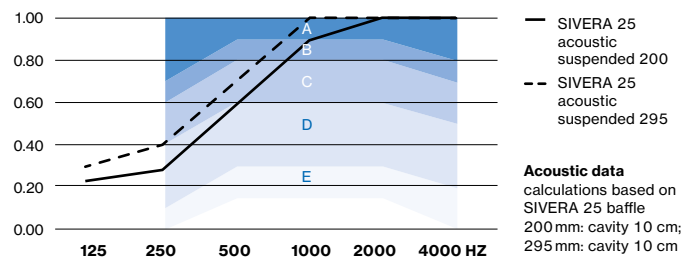

Configuration example

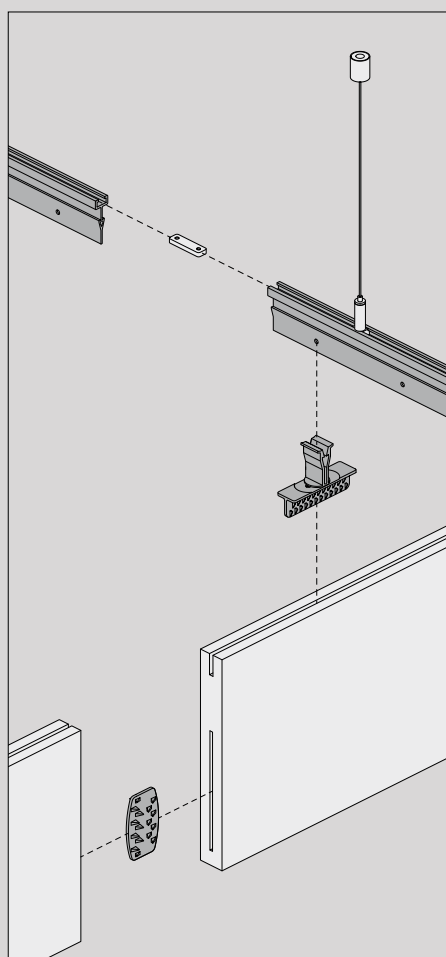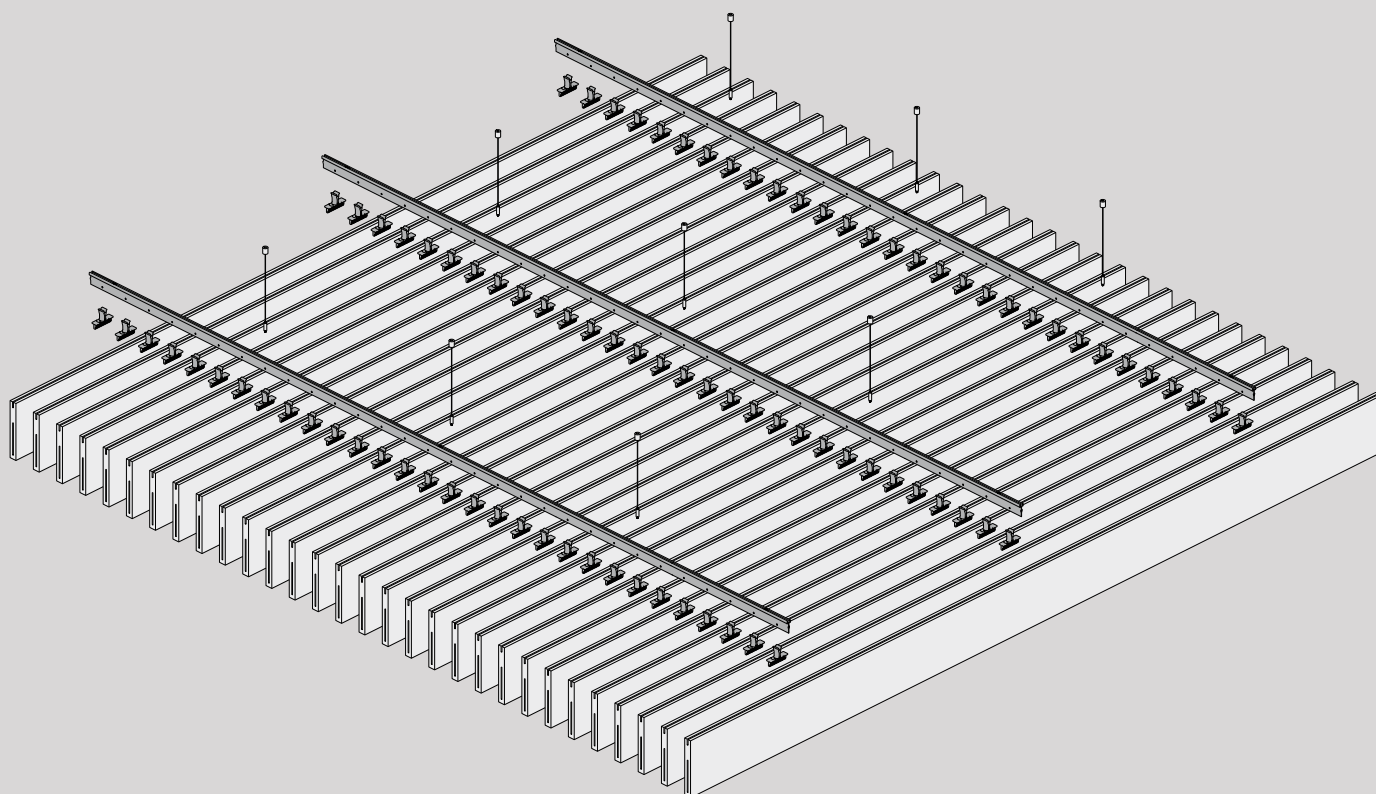


BAFFLE



MOUNTING SET
for BAFFLE




MOUNTING SET
for MOVE IT PRO track



MOUNTING PROFILE



CABLE SUSPENSION



LINEAR CONNECTOR

Order options

ACCESSORY COLOUR			
	pure white	RAL 9010	7
	jet black	RAL 9005	8

SET AMOUNT			
set of 3 pieces		0	#
set of 30 pieces		1	

Mounting accessories

MOUNTING PROFILE			
L (mm)			ORDER CODE
3000			091-4092118

profile holds up to 30 baffles (baffle distance center to center 100 mm); 2 mounting profiles needed for 1485 mm baffle, 3 mounting profiles for 2970 mm; mounting profile distance 990 mm

MOUNTING SET for BAFFLE			
TYPE			ORDER CODE
turnable + moveable (+/- 10 mm) for mounting profile			091-409#018

used to fix the baffle onto the mounting profile, 2 mounting sets required for each 1485 mm baffle, 3 mounting sets required for each 2970 mm baffle

MOUNTING SET for MOVE IT PRO track			
TYPE			ORDER CODE
single piece			091-4090218

needed to mount a MOVE IT PRO track to the mounting profile, suitable for both baffle heights due to a adjustable cable suspension

LINEAR CONNECTOR			
TYPE			ORDER CODE
for mounting profile			091-4095010
for baffle set of 10 pieces			091-4095118

CABLE SUSPENSION			
TYPE	L (mm)		ORDER CODE
for mounting profile set of 3 pieces	3000		091-4093118

one set of three per mounting profile needed

CANOPY			
TYPE			ORDER CODE
canopy			005-231121■

