

LED CONVERSION MODULE VELA / MENO / COMBO 1250


007-INRD1250161 006-CORD12501O



Project / Type


Notes

Count / Date

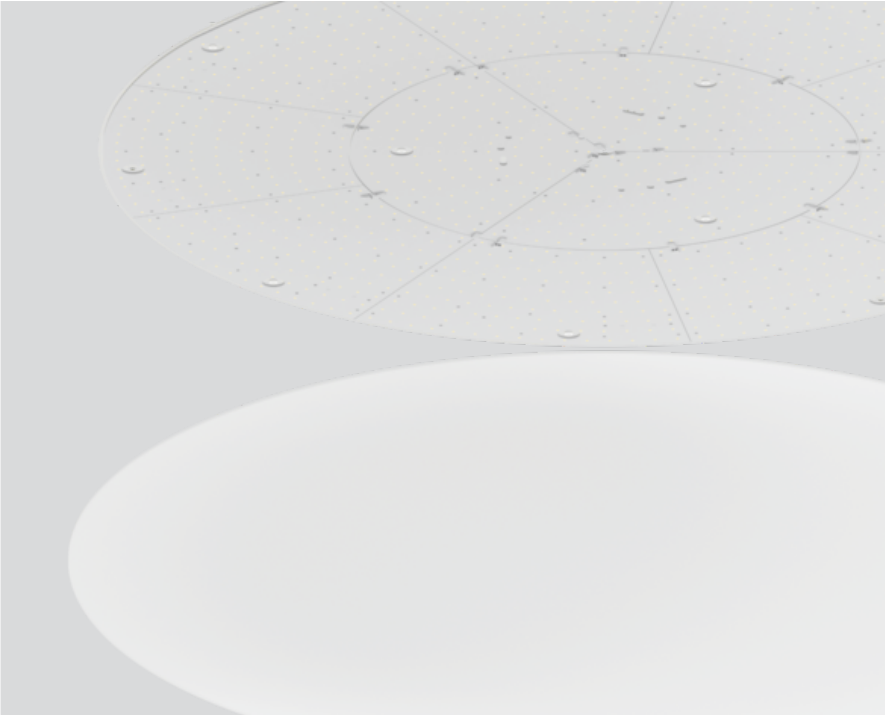


LED conversion module; suitable for VELA round / MENO round / COMBO round; highly reflective coating for improved efficiency; completely homogeneously illuminated, satinised PMMA cover; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. converter, non dimmable; plug-in terminals for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

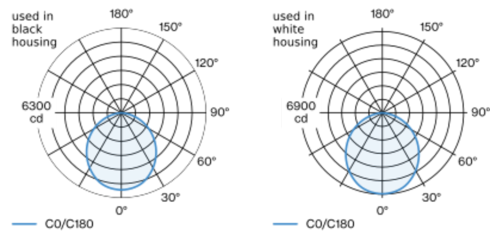

Product drawing



General

Luminaire / Track | Mounted

white

IP20

15700¹-18900² lm

LED

4000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.72 | MDER 0.65

Optical

Opal

PstLM $\leq 1.0^2$ ^{1 3} | SVM $\leq 0.4^2$ ^{1 3}

Electrical

non DIM

PC1 | 220-240 V

system 154 W

system 102¹-123² lm/W ⁴

Physical

diameter 1180 mm | height 92 mm

11.6 kg

¹ used in black housing ² used in white housing
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



LED CONVERSION MODULE VELA / MENO / COMBO 1250

007-INRD1250161 006-CORD12501O



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Factor	

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	3
B13	4
B16	6
B20	7
C10	6
C13	7
C16	10
C20	12

Components

OPAL COVER 1250

ARTICLE NUMBER(S)
006-CORD12501O

