

TILA 22 suspended

MOVE IT 10


030-6640633S



Project / Type


Notes

Count / Date

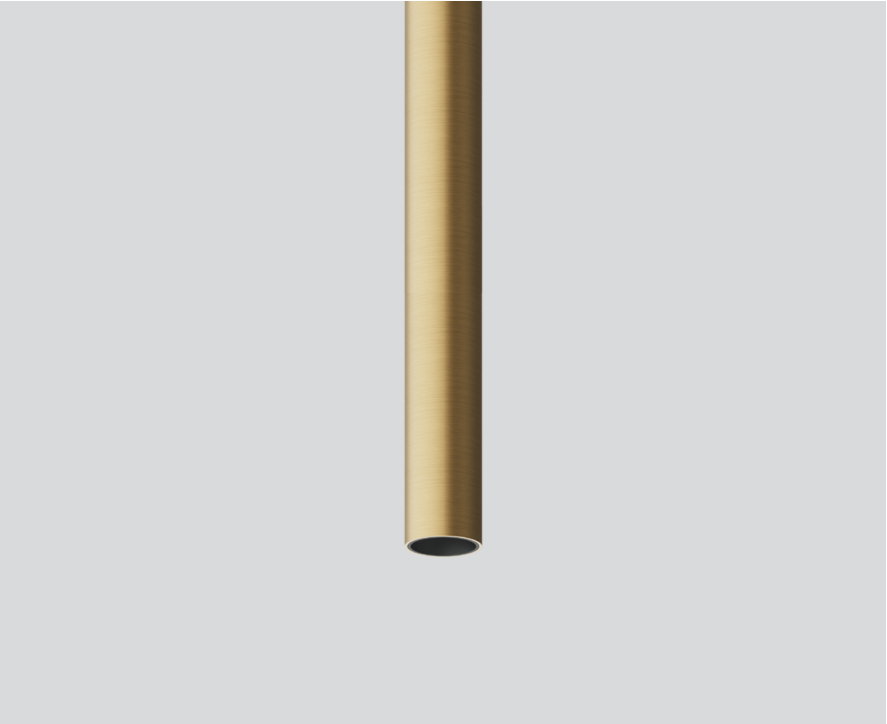


Decorative pendant light inset made of aluminium; surface lacquered in brushed brass; light inset can be installed and moved without tools by means of clip mount; power supplied via MOVE IT system track profile; hot plug protection; pendant fitting with 1500mm suspension, incl. feed (black), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; high quality reflector; precise radiation characteristic with 15° beam; no multiple shadows; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC3; 48 V; DALI-2 control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional;

Light distribution



| spot 15° | | |
|----------|----------|-------|
| h (m) | E0° (lx) | ø (m) |
| 1 | 3190 | 0.27 |
| 2 | 800 | 0.54 |
| 3 | 350 | 0.81 |
| 4 | 200 | 1.08 |
| 5 | 130 | 1.35 |

Product drawing



General

Ceiling , Track Suspended

brushed brass

IP20

341 lm

optical inset 67 lm/W¹

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 97 , R_r: 90 , R_{t(1-15)}: 89

MR 0.81

MDER 0.74

Optical

spot

beam angle 15°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

48 V

fixture 5.7 W

optical inset 5.1 W

PC3

1 DALI Addr.

Physical

diameter 22 mm

height 300 mm

1500 mm

¹ incl. consideration of optical losses
² Value of containing product at full load (undimmed)

Lighting calculator



TILA 22 suspended

MOVE IT 10
030-6640633S



Project / Type

Notes

Count / Date

Mounting accessories

HOOK

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 16 | 030-1000017 |
| jet black | 16 | 030-1000018 |



Optical accessories

HONEYCOMB LOUVER

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|-----------|--------|-------------------|
| jet black | 20 | 007-1965118 |

