


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
UGR ≤ 13, UGR ≤ 16, UGR ≤ 19
bis zu 105 lm/W
L90 / 100000 h
DALI-2, nicht dimmbar
IP20

Types



Farben

Innenfarbe

Lichtverteilung

SASSO 100 round

suspended

EN Cylindrical spotlight made of aluminium; surface light inset lacquered; surface housing powder coated; pendant fitting with cable suspension; incl. feed (black or white); can be individually shortened; precise radiation characteristic due to high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy

DE Zylindrischer Strahler aus Aluminium; Oberfläche Lichteinsatz lackiert; Oberfläche Gehäuse pulverbeschichtet; abgependelt mit Seilabhängung; inkl. Einspeiseleitung (schwarz oder weiß); beliebig kürzbar; präzise Abstrahlcharakteristik durch hochwertige Linsenoptik; COB (Chip on Board) Technologie für höchste Effizienz; keine Mehrfachschatten; effiziente LEDs mit sehr guter Farbwiedergabe; Baldachin für Weiterverdrahtung; Konverter im Baldachin enthalten



glare control
(UGR ≤ 16)




easy mounting
no visible
screws



CRI ≥ 95 2
SDCM
(optional)





SASSO 100 round downlight suspended

CRI ≥ 90 | 2 SDCM | UGR ≤ 13 | cd/m² ≤ 1500 | 220-240 V | 1 ADDR. | X-PERT | X-PERT

SPOT 19°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1430 lm	80 lm/W	0 4 8 - 3 4 2 0 9 ◆ ◪ ■ S
	3000 K	1480 lm	83 lm/W	0 4 8 - 3 4 2 0 0 ◆ ◪ ■ S
	3500 K	1510 lm	84 lm/W	0 4 8 - 3 4 2 0 2 ◆ ◪ ■ S
	4000 K	1550 lm	87 lm/W	0 4 8 - 3 4 2 0 1 ◆ ◪ ■ S

The data values for the luminous flux of fraction may differ for specific order options by -6%. Luminous flux value refers to inner colour traffic white.

MEDIUM 33°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1440 lm	80 lm/W	0 4 8 - 3 4 2 0 9 ◆ ◪ ■ M
	3000 K	1480 lm	83 lm/W	0 4 8 - 3 4 2 0 0 ◆ ◪ ■ M
	3500 K	1520 lm	85 lm/W	0 4 8 - 3 4 2 0 2 ◆ ◪ ■ M
	4000 K	1550 lm	87 lm/W	0 4 8 - 3 4 2 0 1 ◆ ◪ ■ M

The data values for the luminous flux of fraction may differ for specific order options by -7%. Luminous flux value refers to inner colour traffic white.

FLOOD 44°-45°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1600 lm	89 lm/W	0 4 8 - 3 4 2 0 9 ◆ ◪ ■ F
	3000 K	1650 lm	92 lm/W	0 4 8 - 3 4 2 0 0 ◆ ◪ ■ F
	3500 K	1690 lm	94 lm/W	0 4 8 - 3 4 2 0 2 ◆ ◪ ■ F
	4000 K	1720 lm	96 lm/W	0 4 8 - 3 4 2 0 1 ◆ ◪ ■ F

WIDE FLOOD 54°-56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1740 lm	97 lm/W	0 4 8 - 3 4 2 0 9 ◆ ◪ ■ W
	3000 K	1790 lm	100 lm/W	0 4 8 - 3 4 2 0 0 ◆ ◪ ■ W
	3500 K	1830 lm	102 lm/W	0 4 8 - 3 4 2 0 2 ◆ ◪ ■ W
	4000 K	1880 lm	105 lm/W	0 4 8 - 3 4 2 0 1 ◆ ◪ ■ W

Optical accessories



HONEYCOMB LOUVER for BO 55 | JUST 55 | SASSO 100

COLOUR	Ø·H (mm)	ORDER CODE
jet black	50·3	0 0 7 - 1 9 6 5 5 9 8

Order options

CONTROL ◆		COLOUR ◪		INNER COLOUR ■	
non DIM	1	jet black RAL 9005	1	jet black RAL 9005	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white RAL 9016	7
				gold dust RAL 260-M	9

Waterdrop Headquarters, Vienna


Österreich

Architekt
AllesWirdGut
Architekten

Fotograf
tschinkersten fotografie



Verwendete Produkte



JANE semi-recessed / surface / suspended



BETO suspended




SASSO 100 round ceiling




SASSO 100 round suspended

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com


waterdrop

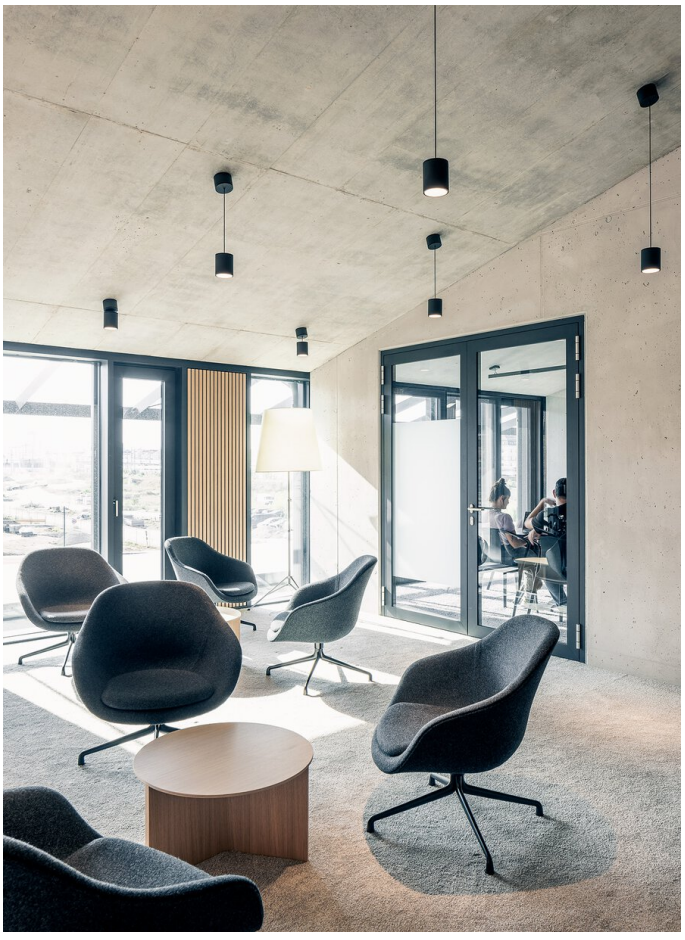

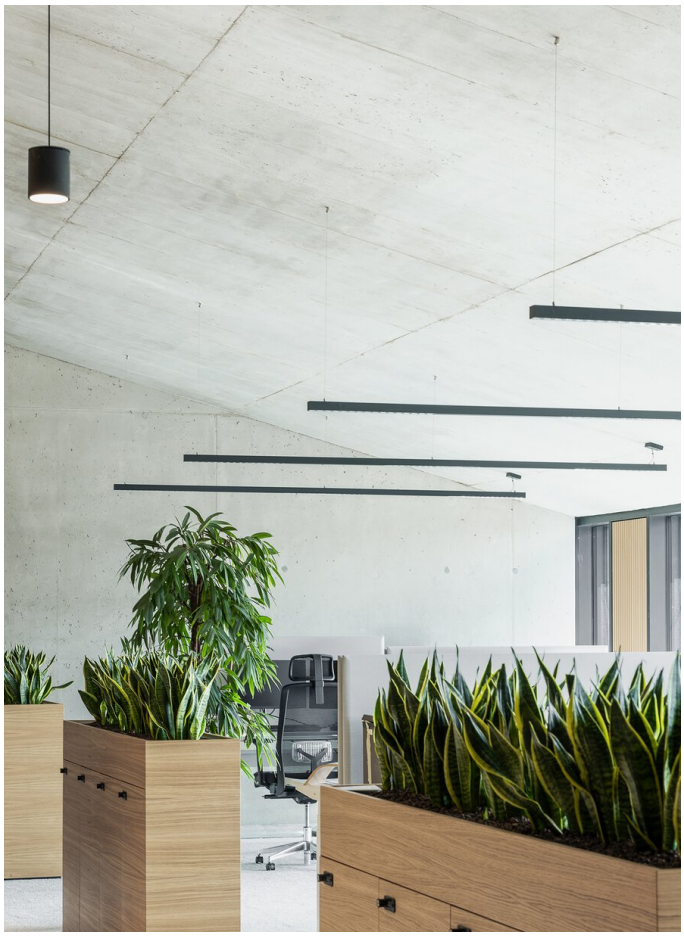
























EG
0

