




Quickinfo

3000 K, 3500 K, 4000 K
 CRI ≥ 90 / 2 SDCM (initial MacAdam)
 bis zu 149 lm/W
 L80 / 50000 h
 DALI-2, nicht dimmbar
 IP20

Types



Farbe



Lichtverteilung



VARO 80 S

^{EN} Track light made of die-cast aluminium; surface powder coated; spotlight head 355° rotatable and 90° tiltable; integrated converter in the plastic adapter; high quality reflector with spherical facet finish; precise radiation characteristics with different beam angles; installed and exchanged without tools; optical attachments as accessories; optical attachments can be combined; COB (Chip on Board) technology for maximum efficiency; variants with >120lm/W available; no multiple shadows; energy-efficient LEDs with very good colour rendering; adapter for toolless insertion or movement on a variety of 3-phase power tracks

^{DE} Stromschienenstrahler aus Aluminiumdruckguss; Oberfläche pulverbeschichtet; Strahlerkopf 355° dreh- und 90° schwenkbar; Konverter im Kunststoffadapter integriert; hochwertiger Reflektor mit sphärischer Facettenoptik; präzise Abstrahlcharakteristik mit verschiedenen Ausstrahlwinkeln; werkzeuglos einsetz- bzw. austauschbar; optische Aufsätze als Zubehör; optische Aufsätze miteinander kombinierbar; mit COB (Chip on Board) Technologie für höchste Effizienz; Varianten mit >120lm/W verfügbar; keine Bildung von Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Adapter für werkzeugloses Einsetzen bzw. Verschieben in verschiedenen 3-Phasen Stromschienen



up to 149 lm/W
(high efficiency)



optical accessories




optical accessories can be combined (max. 2)



355° rotatable, 90° tiltable



VARO 80 S track



SPOT 20°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.0 W	3000 K	1880 lm	145 lm/W	1 8 0 - 6 4 2 4 0 <input type="checkbox"/> <input checked="" type="checkbox"/> S
	3500 K	1900 lm	146 lm/W	1 8 0 - 6 4 2 4 2 <input type="checkbox"/> <input checked="" type="checkbox"/> S
	4000 K	1910 lm	147 lm/W	1 8 0 - 6 4 2 4 1 <input type="checkbox"/> <input checked="" type="checkbox"/> S
21.1 W	3000 K	2750 lm	130 lm/W	1 8 0 - 6 4 2 2 0 <input type="checkbox"/> <input checked="" type="checkbox"/> S
	3500 K	2780 lm	132 lm/W	1 8 0 - 6 4 2 2 2 <input type="checkbox"/> <input checked="" type="checkbox"/> S
	4000 K	2790 lm	132 lm/W	1 8 0 - 6 4 2 2 1 <input type="checkbox"/> <input checked="" type="checkbox"/> S
25.3 W	3000 K	3100 lm	123 lm/W	1 8 0 - 6 4 2 3 0 <input type="checkbox"/> <input checked="" type="checkbox"/> S
	3500 K	3140 lm	124 lm/W	1 8 0 - 6 4 2 3 2 <input type="checkbox"/> <input checked="" type="checkbox"/> S
	4000 K	3140 lm	124 lm/W	1 8 0 - 6 4 2 3 1 <input type="checkbox"/> <input checked="" type="checkbox"/> S

MEDIUM 27°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.0 W	3000 K	1920 lm	148 lm/W	1 8 0 - 6 4 2 4 0 <input type="checkbox"/> <input checked="" type="checkbox"/> M
	3500 K	1940 lm	149 lm/W	1 8 0 - 6 4 2 4 2 <input type="checkbox"/> <input checked="" type="checkbox"/> M
	4000 K	1940 lm	149 lm/W	1 8 0 - 6 4 2 4 1 <input type="checkbox"/> <input checked="" type="checkbox"/> M
21.1 W	3000 K	2800 lm	133 lm/W	1 8 0 - 6 4 2 2 0 <input type="checkbox"/> <input checked="" type="checkbox"/> M
	3500 K	2830 lm	134 lm/W	1 8 0 - 6 4 2 2 2 <input type="checkbox"/> <input checked="" type="checkbox"/> M
	4000 K	2840 lm	135 lm/W	1 8 0 - 6 4 2 2 1 <input type="checkbox"/> <input checked="" type="checkbox"/> M
25.3 W	3000 K	3150 lm	125 lm/W	1 8 0 - 6 4 2 3 0 <input type="checkbox"/> <input checked="" type="checkbox"/> M
	3500 K	3190 lm	126 lm/W	1 8 0 - 6 4 2 3 2 <input type="checkbox"/> <input checked="" type="checkbox"/> M
	4000 K	3200 lm	126 lm/W	1 8 0 - 6 4 2 3 1 <input type="checkbox"/> <input checked="" type="checkbox"/> M

FLOOD 39°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
13.0 W	3000 K	1890 lm	145 lm/W	1 8 0 - 6 4 2 4 0 <input type="checkbox"/> <input checked="" type="checkbox"/> F
	3500 K	1910 lm	147 lm/W	1 8 0 - 6 4 2 4 2 <input type="checkbox"/> <input checked="" type="checkbox"/> F
	4000 K	1920 lm	148 lm/W	1 8 0 - 6 4 2 4 1 <input type="checkbox"/> <input checked="" type="checkbox"/> F
21.1 W	3000 K	2760 lm	131 lm/W	1 8 0 - 6 4 2 2 0 <input type="checkbox"/> <input checked="" type="checkbox"/> F
	3500 K	2790 lm	132 lm/W	1 8 0 - 6 4 2 2 2 <input type="checkbox"/> <input checked="" type="checkbox"/> F
	4000 K	2800 lm	133 lm/W	1 8 0 - 6 4 2 2 1 <input type="checkbox"/> <input checked="" type="checkbox"/> F
25.3 W	3000 K	3110 lm	123 lm/W	1 8 0 - 6 4 2 3 0 <input type="checkbox"/> <input checked="" type="checkbox"/> F
	3500 K	3150 lm	125 lm/W	1 8 0 - 6 4 2 3 2 <input type="checkbox"/> <input checked="" type="checkbox"/> F
	4000 K	3160 lm	125 lm/W	1 8 0 - 6 4 2 3 1 <input type="checkbox"/> <input checked="" type="checkbox"/> F

Order options

CONTROL		COLOUR	
non DIM	1	traffic white RAL 9016	7
DALI-2	3	jet black RAL 9005	8


Planning Information



possibility to combine different optical accessories (max. 2 pieces)

Optical accessories (optional)

HONEYCOMB LOUVER



Ø-H (mm)	ORDER CODE
75-9	080 - 6401118

LINEAR PRISMATIC LENS

Ø-H (mm)	ORDER CODE
75-9	080 - 6402110P

SNOOT angle

Ø-H (mm)	ORDER CODE
66-38	080 - 6403318

SNOOT medium

Ø-H (mm)	ORDER CODE
66-38	080 - 6403218

SNOOT short

Ø-H (mm)	ORDER CODE
66-23	080 - 6403118

Order options

CONTROL		COLOUR	
non DIM	1	traffic white RAL 9016	7
DALI-2	3	jet black RAL 9005	8

On Running, Zurich

Schweiz

Architekt

spillmann echsle
architekten ag

Lighting Design

Caduff & Stocker,
lichtplanung gmbh

Fotograf


Eduardo Perez




Verwendete Produkte



L1 MOVE IT 45




MOVE IT 45 surface /
suspended system



VARO 80 S



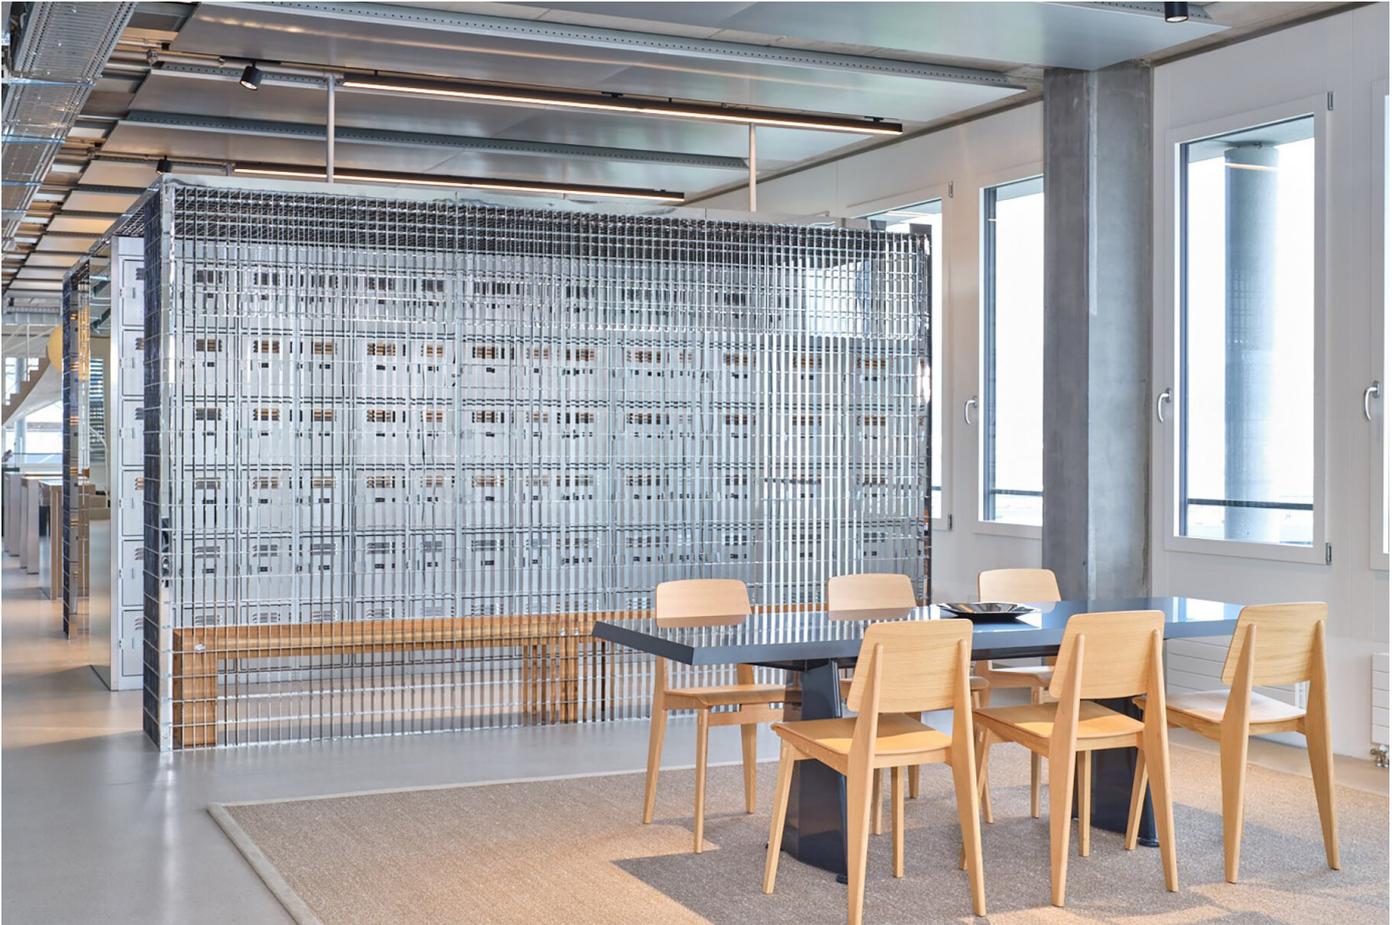





Bank Raiffeisen, Founex

Schweiz

Architekt

ABA PARTENAIRES SA

Fotograf

Julie Masson



Verwendete Produkte



VARO 80 S



