



SASSO 60 base 2 lamps

ceiling


EN Cylindrical spotlight made of aluminium; light inset lacquered; housing powder coated; light inset rotatable and tiltable; double lamps; surface mounted housing in aluminium incl. converter; mounting plate with pre-assembled converter unit can be pre-mounted; luminaire housing can be attached without tools by interlock; precise radiation characteristic due to high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering; luminaire for through wiring

DE Zylindrischer Strahler aus Aluminium; Lichteinsatz lackiert; Gehäuse pulverbeschichtet; Lichteinsatz dreh- und schwenkbar; zweiflammig; Anbaugehäuse aus Aluminium inkl. Converter; Montageplatte mit vormontierter Konvertereinheit vorab montierbar; Leuchtenkörper mittels Verriegelung werkzeuglos aufsetzbar; präzise Abstrahlcharakteristik durch hochwertige Linsenoptik; COB (Chip on Board) Technologie für höchste Effizienz; keine Mehrfachschatten; effiziente LEDs mit sehr guter Farbwiedergabe; Leuchte für Weiterverdrahtung

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90 / 2 SDCM (initial MacAdam)
 UGR ≤ 10, UGR ≤ 13, UGR ≤ 16, UGR ≤ 19
 bis zu 93 lm/W
 L80 / 50000 h
 DALI-2, nicht dimmbar
 IP20

Types

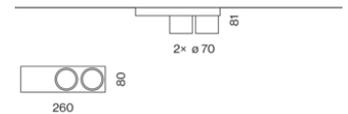

Farbe



Innenfarbe



Lichtverteilung



glare control
(UGR ≤ 16)



easy mounting
no visible
screws



CRI ≥ 95 2
SDCM
(optional)




SASSO 60 base round adjustable 2 lamps ceiling



SPOT 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
20.8 W	2700 K	1470 lm	71 lm/W	0 4 8 - 3 1 4 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	3000 K	1520 lm	73 lm/W	0 4 8 - 3 1 4 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	3500 K	1550 lm	75 lm/W	0 4 8 - 3 1 4 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	4000 K	1600 lm	77 lm/W	0 4 8 - 3 1 4 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour traffic white.



MEDIUM 27°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
20.5 W	2700 K	1750 lm	85 lm/W	0 4 8 - 3 1 4 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	3000 K	1810 lm	88 lm/W	0 4 8 - 3 1 4 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	3500 K	1850 lm	90 lm/W	0 4 8 - 3 1 4 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	4000 K	1890 lm	92 lm/W	0 4 8 - 3 1 4 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M

The data values for the luminous flux may differ for specific order options by -9%. Luminous flux value refers to inner colour traffic white.

FLOOD 40°-41°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
20.5 W	2700 K	1660 lm	81 lm/W	0 4 8 - 3 1 4 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	3000 K	1720 lm	84 lm/W	0 4 8 - 3 1 4 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	3500 K	1760 lm	86 lm/W	0 4 8 - 3 1 4 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	4000 K	1800 lm	88 lm/W	0 4 8 - 3 1 4 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F

The data values for the luminous flux may differ for specific order options by -15%. Luminous flux value refers to inner colour traffic white.

WIDE FLOOD 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
20.5 W	2700 K	1750 lm	85 lm/W	0 4 8 - 3 1 4 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	3000 K	1820 lm	89 lm/W	0 4 8 - 3 1 4 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	3500 K	1860 lm	91 lm/W	0 4 8 - 3 1 4 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	4000 K	1900 lm	93 lm/W	0 4 8 - 3 1 4 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W

The data values for the luminous flux may differ for specific order options by -11%. Luminous flux value refers to inner colour traffic white.

Order options


CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black RAL 9005	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white RAL 9016	7
				gold dust RAL 260-M	9

Einfamilienhaus EFF, Austria


Österreich

Architekt
STUDIO WG3

Fotograf
Heldentheater

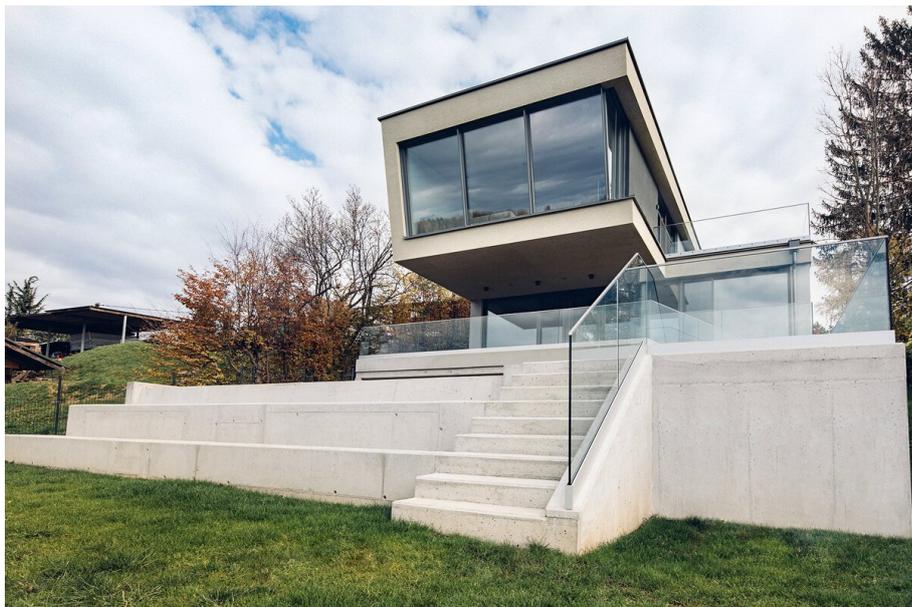

Verwendete Produkte



SASSO 60 base 2
lamps ceiling

