


UNICO Q9 basic

trimless

090-7Q963B0021 090-7Q90100




Project / Type
Notes
Count / Date

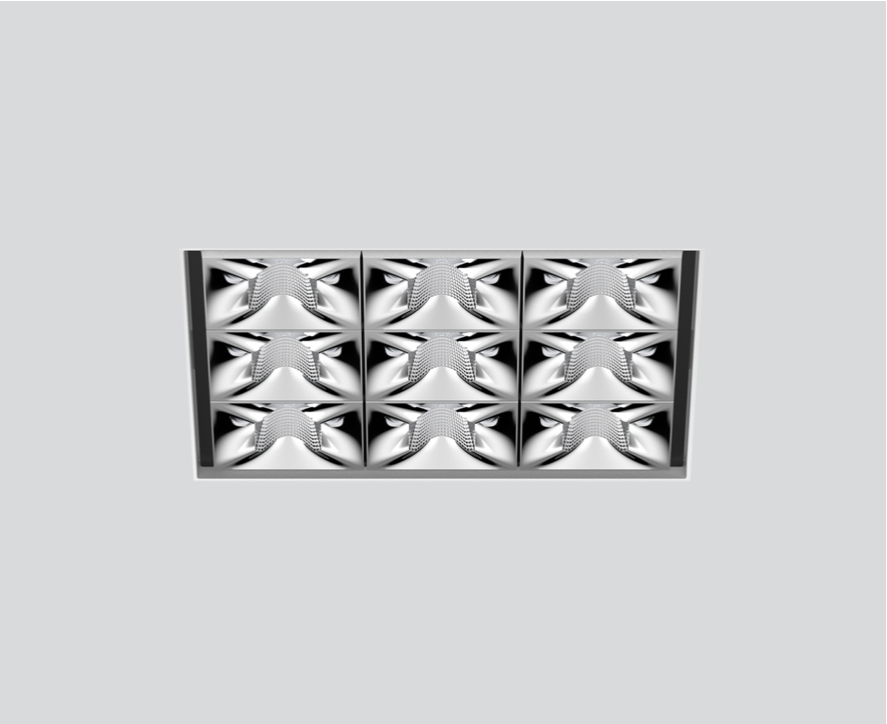


Square recessed multi-downlight made of die-cast aluminium; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/20/25 mm; equipped with nine medium round light elements; symmetrical light distribution with precise radiation characteristic, beam angle 33°; high quality reflector with micro-faceted, aluminum-vaporised surface; chrome reflector; UGR ≤ 10; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; passive cooling of the LEDs through improved heat sink geometry; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source not replaceable; control gear replaceable by an authorized professional; clank-free;

Light distribution



Product drawing



General

Ceiling Recessed
chrome reflector
IP20
2900 lm

LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 102 R _f : 93 R ₍₁₋₁₅₎ : 92
MR 0.81 MDER 0.74

Optical

medium round beam angle 33°
UGR ≤ 10 ≥65° <3000 cd/m²
PstLM ≤ 1.0 ¹ SVM ≤ 0.4 ¹

Electrical

DALI-2
PC2 220-240 V
system 29.9 W
system 97 lm/W ²

Physical

trimless
length 122 mm width 122 mm height 51 mm
0.89 kg

Cutout

length 130 mm width 130 mm
min. ceiling thickness 12.5 mm max. ceiling thickness 25 mm
recessed depth 90 mm

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator

