

# LINEA opal / 1 spot

wall

058-6178638CH



Project / Type


Notes

Count / Date




Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 4000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 97$ ; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,6 W / 159 lm / 3000 K right; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

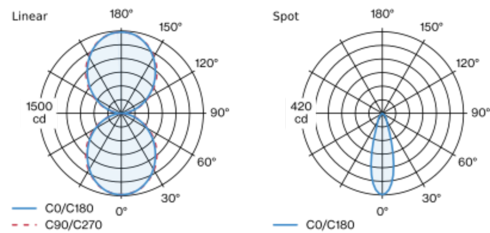

flood 30°		Spot	
h (m)	E0° (lx)	ø (m)	
1	419	0.54	
2	105	1.09	
3	47	1.63	
4	26	2.17	
5	17	2.72	

## Product drawing



## General

Wall | Surface

tilt max 89°

black | RAL 9005 <sup>1</sup>

IP20

172 lm

## LED

3000 K<sup>2</sup>-4000 K<sup>3</sup>

CRI  $\geq 97^{2-90^3}$

L95 / 50000 h<sup>2</sup>-L85 / 50000 h<sup>3</sup>

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 92<sup>2</sup>-98<sup>3</sup> | R<sub>r</sub>: 86<sup>2</sup>-90<sup>3</sup> | R<sub>f1-15</sub>: 94<sup>2</sup>-88<sup>3</sup>

MR 0.53<sup>2</sup>-0.76<sup>3</sup> | MDER 0.48<sup>2</sup>-0.69<sup>3</sup>

## Optical

beam angle 30°

PstLM  $\leq 1.0^{2-3-4}$  | SVM  $\leq 0.4^{2-3-4}$

High Performance Opal | flood<sup>2</sup>-opal (lambertsch)<sup>3</sup>

## Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 2.7<sup>2</sup>-70<sup>3</sup> W

system 64<sup>2</sup>-110<sup>3</sup> lm/W <sup>5</sup>

## Physical

length 2510 mm | width 40 mm | height 100 mm

right

<sup>1</sup> RAL code <sup>2</sup> Spot <sup>3</sup> Linear  
<sup>4</sup> Value of containing product at full load (undimmed)  
<sup>5</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



# LINEA opal / 1 spot

wall  
058-6178638CH



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.89
LSF	1	1	1	1	1

MF

LMF × RSMF × LLMF × LSF

MF

Maintenance Factor

LMF<sup>a</sup>

Luminaire Maintenance Factor

RSMF<sup>a</sup>

Room Surface Maintenance Factor

LLMF

Lamp Lumens Maintenance Factor

LSF

Lamp Survival Factor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	9
B13	12
B16	15
B20	19
C10	15
C13	20
C16	25
C20	31

