

LENO jut-out

semi-recessed / surface system

051-8216637J 051-8920187



Project / Type

Notes

Count / Date



General

Ceiling / Wall , Semi-Recessed¹-Surface²

white , RAL 9010 ³

front IP40¹-IP20² , back IP20

3730 lm

2040 lm/m

traffic white

LED

4000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.72

MDER 0.66

Optical

Jut-Out

opal (lambertsch)

PstLM ≤ 1.0^{1 2 4}

SVM ≤ 0.4^{1 2 4}

Electrical

DALI-2

220-240 V

system 28.6 W

system 130 lm/W⁵

PC1

1 DALI Addr.

16 W/m

Physical

length 1830 mm

width 89 mm

height 38 mm

4.3 kg

Cutout

length 1843 mm

width 70 mm

min. ceiling thickness 12.5 mm


recessed depth 13 mm

¹ semi-recessed ² surface ³ RAL code


⁴ Value of containing product at full load (undimmed)

⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution

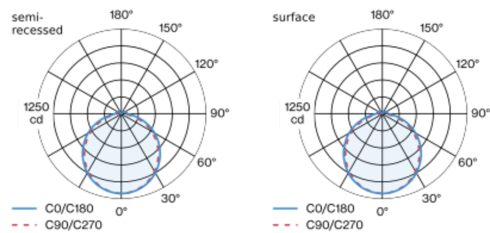

Product drawing



Installation instructions





Project / Type _____

Notes _____

Count / Date _____

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.95	0.93	0.91	0.9
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Factor	

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	18
B13	24
B16	30
B20	37
C10	31
C13	40
C16	51
C20	62

Components

INSTALLATION CHANNEL

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
traffic white	1830-89-28	051-8920187



Mounting accessories

END CAPS

COLOUR	ARTICLE NUMBER(S)
pure white	051-8992217
jet black	051-8992218



Mounting accessories

LINEAR CONNECTOR

TYPE	ARTICLE NUMBER(S)
1 pair	051-8992110
10 pairs	051-8992110:10



POWER FEEDER CONNECTOR

ARTICLE NUMBER(S)
051-8992330



Other accessories

DISMOUNTING TOOL

TYPE	ARTICLE NUMBER(S)
vacuum cup	086-30000

