

TULA nano suspended

canopy surface


049-5510517F 005-2602197



Project / Type

Notes

Count / Date

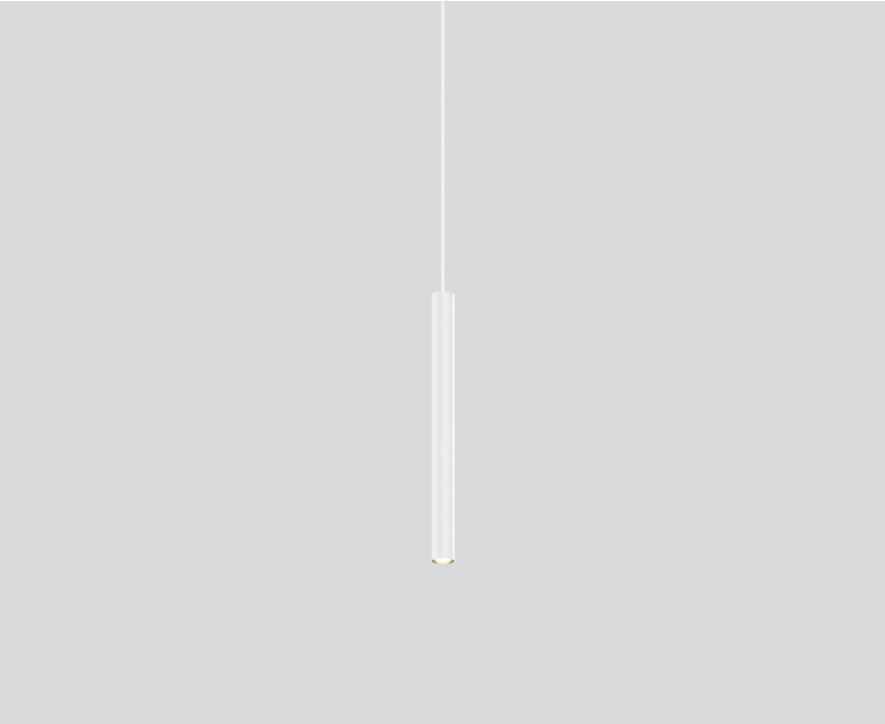

General

Ceiling , Suspended
white , RAL 9016 ¹
Canopy traffic white
IP20
717 lm
fixture 79 lm/W²

LED

3000 K
CRI ≥ 90
initial MacAdam ≤ 3 SDCM
R_g: 100 , R_f: 91 , R₍₁₋₁₅₎: 88
MR 0.59
MDER 0.53

Optical

flood
beam angle 30°
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³


Electrical

Casambi
220-240 V
system 12.1 W
fixture 9.1 W
18 Vf
500 mA
PC2

Physical

diameter 26 mm
height 300 mm


Light distribution



flood 30°

| h (m) | EO° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 2110 | 0.53 |
| 2 | 530 | 1.07 |
| 3 | 230 | 1.60 |
| 4 | 130 | 2.13 |
| 5 | 80 | 2.66 |

Product drawing



¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator



TULA nano suspended

canopy surface

049-5510517F 005-2602197



Project / Type

Notes

Count / Date

Components

CANOPY

| TYPE | COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|------------------|---------------|--------|-------------------|
| 500 mA Casambi | traffic white | 115 | 005-2602197 |



Mounting accessories

SPECIAL MOUNTING TOOL

| TYPE | Ø (MM) | ARTICLE NUMBER(S) |
|--|--------|-------------------|
| necessary to install mounting housing trimless | 100 | 063-8912110 |



RING CEILING MOUNTED

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 50 | 050-0510217 |
| jet black | 50 | 050-0510218 |



HOOK

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 18 | 050-0510317 |
| jet black | 18 | 050-0510318 |



Optional electrical accessories

DIN RAIL POWER SUPPLY

| TYPE | L·W·H (MM) | ARTICLE NUMBER(S) |
|-------|------------|-------------------|
| 160 W | 72·90·63 | 005-6520210 |



DIN RAIL LED DRIVER

| TYPE | L·W·H (MM) | ARTICLE NUMBER(S) |
|--------------------------------|------------|-------------------|
| DALI-2 200-1050 mA 2 x 42W | 36·88·59 | 005-6121030 |



TULA nano suspended

canopy surface

049-5510517F 005-2602197



Project / Type

Notes

Count / Date

Optical accessories

OVAL LENS

| | |
|--------|-------------------|
| Ø (MM) | ARTICLE NUMBER(S) |
| 42 | 007-1965880 |



SOFT LENS

| | |
|--------|-------------------|
| Ø (MM) | ARTICLE NUMBER(S) |
| 42 | 007-1965980 |



WALLWASHER LENS

| | |
|--------|-------------------|
| Ø (MM) | ARTICLE NUMBER(S) |
| 42 | 007-1965780 |

